## **SIEMENS**

## **Data sheet**



SIRIUS motor starter M200D AS-i Communication: AS-Interface Reversing starter Basic Electronic switching AC-3, 4 kW / 400 V 1.5 A...9.00 A Electronic overload protection Thermistor: THERMOCLICK / PTC without brake contact 2DI AS-i + 2DI / 1DO on device Han Q4/2 - Han Q8/0 with manual on-site operation and keyoperated switch

product brand name	SIRIUS
product designation	Motor starters
design of the product	reversing starter
product type designation	M200D
product function	
on-site operation	Yes
<ul> <li>control circuit interface to parallel wiring</li> </ul>	No
insulation voltage rated value	500 V
degree of pollution	3
surge voltage resistance rated value	6 000 V
maximum permissible voltage for protective separation	
<ul> <li>between main and auxiliary circuit</li> </ul>	400 V
<ul> <li>between control and auxiliary circuit</li> </ul>	24 V
protection class IP	IP65
shock resistance	12g / 11 ms
type of assignment	1
certificate of suitability	CE
Substance Prohibitance (Date)	07/01/2006
SVHC substance name	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 2-Methyl-1-(4-methylthiophenyl)-2-morpho - 71868-10-5 2,2',6,6'-Tetrabrom-4,4'-isopropylidendi - 79-94-7
product function	
direct start	No
reverse starting	Yes
product component motor brake output	No
product feature	
<ul> <li>brake control with 230 V AC</li> </ul>	No
<ul> <li>brake control with 400 V AC</li> </ul>	No
<ul> <li>brake control with 24 V DC</li> </ul>	No
<ul> <li>brake control with 180 V DC</li> </ul>	No
<ul> <li>brake control with 500 V DC</li> </ul>	No
product extension braking module for brake control	No
product function short circuit protection	Yes
design of short-circuit protection	circuit-breakers
maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	50 000 A
at 500 V rated value	20 000 A
EMC emitted interference according to IEC 60947-1	CISPR11, ambience A (group 2)
EMC immunity according to IEC 60947-1	corresponds to degree of severity 3, ambience A (industrial sector)

dura to bound and 10 10 10 040000 1 1	0.13/
due to burst according to IEC 61000-4-4  due to sandwater partly suggested as a IEC 64000 4.5.	2 kV network connection / 1 kV control connection
due to conductor-earth surge according to IEC 61000-4-5      due to conductor earth street according to IEC 61000-4-5	2 kV
<ul> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV
touch protection against electrical shock	finger-safe
Main circuit	iii iyo i-saic
	3
number of poles for main current circuit	
design of the switching contact	solid-state / thyristor / 2 phases
adjustable current response value current of the current- dependent overload release	1.5 9 A
type of the motor protection	full motor protection
operating voltage rated value	200 440 V
operational current	
at AC at 400 V rated value	9 A
at AC-3 at 400 V rated value	9 A
operating power	
• at AC-3	
— at 400 V rated value	4 kW
— at 500 V rated value	4 000 W
• at AC-3e	
— at 400 V rated value	4 kW
— at 500 V rated value	4 kW
product function	1.00
digital inputs parameterizable	No
digital imputs parameterizable     digital outputs parameterizable	No
number of digital inputs	4
number of aigital inputs	7
	1
for digital output signals     for digital input signals	4
• for digital input signals	1
number of digital outputs Supply voltage	
	DO.
type of voltage of the supply voltage	DC
supply voltage 1 at DC	24 V
supply voltage 1 at DC rated value	30 V
minimum permissible	26.5 V
maximum permissible	31.6 V
Control circuit/ Control	20
	DC
type of voltage of the control supply voltage	
control supply voltage at DC rated value	20.4 28.8 V
control supply voltage at DC rated value control supply voltage 1	20.4 28.8 V
control supply voltage at DC rated value  control supply voltage 1  • at DC rated value	20.4 28.8 V 24 V
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value	20.4 28.8 V 24 V 20.4 28.8 V
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC	20.4 28.8 V 24 V
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC	20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation	20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation	20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit	20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit	20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit  in switching state ON with bypass circuit	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit  in switching state ON with bypass circuit	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit  in switching state ON with bypass circuit  Response times	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A  1.9584 W  6.9408 W
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit  in switching state ON with bypass circuit  Response times  ON-delay time	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A  1.9584 W  6.9408 W
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit  in switching state ON with bypass circuit  Response times  ON-delay time  OFF-delay time	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A  1.9584 W  6.9408 W
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit  in switching state ON with bypass circuit  Response times  ON-delay time  OFF-delay time  mounting position	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A  1.9584 W  6.9408 W  25 ms  35 ms  vertical, horizontal, flat
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit  in switching state ON with bypass circuit  Response times  ON-delay time  OFF-delay time  mounting position  recommended	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A  1.9584 W 6.9408 W  25 ms 35 ms vertical, horizontal, flat horizontal
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit  in switching state ON with bypass circuit  Response times  ON-delay time  OFF-delay time  mounting position  recommended  fastening method	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A  1.9584 W 6.9408 W  25 ms 35 ms vertical, horizontal, flat horizontal screw fixing
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit  in switching state ON with bypass circuit  response times  ON-delay time  OFF-delay time  mounting position  recommended  fastening method  height	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A  1.9584 W  6.9408 W  25 ms  35 ms  vertical, horizontal, flat horizontal screw fixing 215 mm
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit  in switching state ON with bypass circuit  response times  ON-delay time  OFF-delay time  mounting position  recommended  fastening method  height  width	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A  1.9584 W 6.9408 W  25 ms 35 ms vertical, horizontal, flat horizontal screw fixing 215 mm 294 mm
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit  in switching state ON with bypass circuit  response times  ON-delay time  OFF-delay time  mounting position  recommended  fastening method  height  width  depth  Ambient conditions	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A  1.9584 W 6.9408 W  25 ms 35 ms vertical, horizontal, flat horizontal screw fixing 215 mm 294 mm
control supply voltage at DC rated value  control supply voltage 1  at DC rated value  at DC rated value  at DC  control current at DC  in standby mode of operation  during operation  power loss [W] in auxiliary and control circuit  in switching state OFF with bypass circuit  in switching state ON with bypass circuit  Response times  ON-delay time  OFF-delay time  mounting position  recommended  fastening method  height  width  depth	20.4 28.8 V  24 V  20.4 28.8 V  20.4 28.8 V  100 mA  0.6 A  1.9584 W 6.9408 W  25 ms 35 ms vertical, horizontal, flat horizontal screw fixing 215 mm 294 mm 159 mm

<ul><li>during operation</li></ul>	-25 +55 °C
during storage	-40 +70 °C
during transport	-40 +70 °C
relative humidity during operation	10 95 %
protocol is supported	
<ul> <li>PROFIBUS DP protocol</li> </ul>	No
PROFINET protocol	No
design of the interface	
AS-Interface protocol	Yes
PROFINET protocol	No
PROFIBUS DP protocol	No
product function bus communication	Yes
protocol is supported AS-Interface protocol	Yes
product function control circuit interface with IO link	No
type of electrical connection of the communication interface	M12 plug
type of electrical connection	
for main current circuit	plug according to ISO 23570, HAN Q4/2
<ul> <li>for auxiliary and control circuit</li> </ul>	connector
type of electrical connection	
1 for digital input signals	M12 socket
<ul> <li>1 for digital output signals</li> </ul>	M12 socket
<ul> <li>2 for digital input signals</li> </ul>	M12 socket
<ul> <li>3 for digital input signals</li> </ul>	M12 socket
• 4 for digital input signals	M12 socket
type of electrical connection	
• at the manufacturer-specific device interface	optical interface
<ul> <li>for device addressing</li> </ul>	M12 plug
<ul> <li>for supply voltage line-side</li> </ul>	M12 plug
full-load current (FLA) for 3-phase AC motor at 480 V rated value	7.6 A
yielded mechanical performance [hp]	
• for 3-phase AC motor	
— at 220/230 V rated value	2 hp
— at 460/480 V rated value	5 hp
operating voltage at AC at 60 Hz according to CSA and UL rated value	480 V
Certificates/ approvals	

Certificates/ approvals

General Product Approval





Confirmation







**Declaration of Conformity** 

**Test Certificates** 

other

Dangerous Good





Type Test Certificates/Test Report



Confirmation

**Transport Information** 

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)


https://www.siemens.com/ic10


Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1315-6NS71-3AA0

Cax online generator

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax">http://www.automation.siemens.com/bilddb/cax</a> de.aspx?mlfb=3RK1315-6NS71-3AA0&lang=en

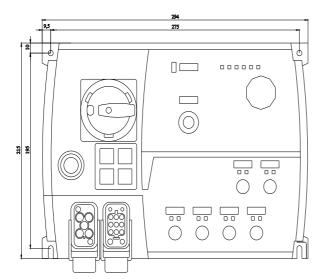

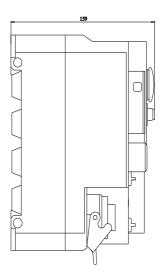

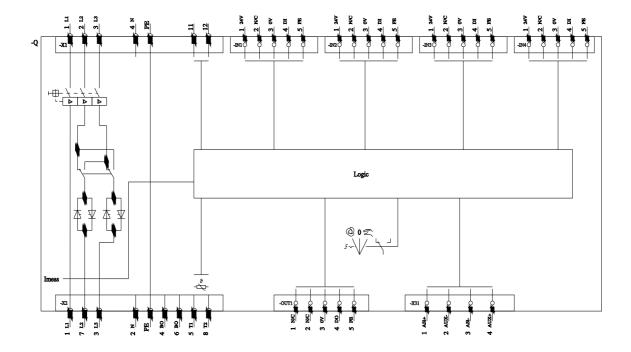

last modified: 8/9/2023 🖸