SIEMENS

Data sheet

3RK1325-6LS71-3AA5



SIRIUS motor starter M200D AS-i Communication: AS-Interface Reversing starter standard Electronic switching AC-3, 5.5 kW / 400 V 1.5 A...12.00 A Electronic overload protection Thermistor: THERMOCLICK / PTC with brake contact 180 V DC 4 DI / 1 DO AS-i Han Q4/2 - Han Q8/0 with manual on-site operation and key-operated switch

product brand name	SIRIUS
product designation	Motor starters
design of the product	reversing starter
product type designation	M200D
product function	
on-site operation	Yes
control circuit interface to parallel wiring	No
insulation voltage rated value	500 V
degree of pollution	3
surge voltage resistance rated value	6 000 V
maximum permissible voltage for protective separation	
between main and auxiliary circuit	400 V
between control and auxiliary circuit	24 V
protection class IP	IP65
shock resistance	12g / 11 ms
type of assignment	1
certificate of suitability	CE
Substance Prohibitance (Date)	07/01/2006
SVHC substance name	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 2-Methyl-1-(4-methylthiophenyl)-2-morpho - 71868-10-5 2,2',6,6'-Tetrabrom-4,4'-isopropylidendi - 79-94-7
product function	
direct start	No
reverse starting	Yes
product component motor brake output	Yes
product feature	
 brake control with 230 V AC 	No
 brake control with 400 V AC 	No
 brake control with 24 V DC 	No
 brake control with 180 V DC 	Yes
 brake control with 500 V DC 	No
product extension braking module for brake control	No
product function short circuit protection	Yes
product function short circuit protection design of short-circuit protection	Yes circuit-breakers
design of short-circuit protection	
design of short-circuit protection maximum short-circuit current breaking capacity (Icu)	circuit-breakers
design of short-circuit protection maximum short-circuit current breaking capacity (Icu) • at 400 V rated value	circuit-breakers 50 000 A
design of short-circuit protection maximum short-circuit current breaking capacity (Icu) • at 400 V rated value • at 500 V rated value	circuit-breakers 50 000 A 20 000 A

a due to burst appording to JEC 61000.4.4	2 kV natural connection (1 kV control connection
due to burst according to IEC 61000-4-4	2 kV network connection / 1 kV control connection
• due to conductor-earth surge according to IEC 61000-4-5	2 kV
 due to conductor-conductor surge according to IEC 61000-4-5 	1 KV
touch protection against electrical shock	finger-safe
Main circuit	
number of poles for main current circuit	3
design of the switching contact	solid-state / thyristor / 2 phases
adjustable current response value current of the current-	1.5 12 A
dependent overload release	1.5 12 A
type of the motor protection	full motor protection
operating voltage rated value	200 440 V
operational current	
 at AC at 400 V rated value 	12 A
• at AC-3 at 400 V rated value	12 A
operating power	
• at AC-3	
— at 400 V rated value	5.5 kW
— at 500 V rated value	5 500 W
• at AC-3e	
 at AC-se at 400 V rated value 	6 kW
— at 500 V rated value	5.5 kW
product function	
digital inputs parameterizable	Yes
digital outputs parameterizable	Yes
number of digital inputs	4
number of sockets	
 for digital output signals 	1
 for digital input signals 	4
number of digital outputs	1
Supply voltage	
to the state of th	DC
type of voltage of the supply voltage	
type of voltage of the supply voltage supply voltage 1 at DC	24 V
supply voltage 1 at DC	24 V
supply voltage 1 at DC supply voltage 1 at DC rated value	24 V 30 V
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible	24 V 30 V 26.5 V
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control	24 V 30 V 26.5 V
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage	24 V 30 V 26.5 V 31.6 V DC
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value	24 V 30 V 26.5 V 31.6 V
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V
supply voltage 1 at DC supply voltage 1 at DC rated value	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC cated value • at DC control current at DC	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 100 mA
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage at DC rated value e at DC rated value • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage at DC rated value e at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit response times	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W 8.2656 W
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit Response times ON-delay time	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W 8.2656 W
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit • in switching state ON with bypass circuit • in switching state ON with bypass circuit	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W 8.2656 W 25 ms 35 ms
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W 8.2656 W 25 ms 35 ms vertical, horizontal, flat
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit • in switching state ON with bypass circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W 8.2656 W 25 ms 35 ms vertical, horizontal, flat horizontal
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit • in switching position • recommended fastening method	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W 8.2656 W 25 ms 35 ms vertical, horizontal, flat horizontal screw fixing
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit Response times ON-delay time mounting position • recommended fastening method height	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W 8.2656 W 25 ms 35 ms vertical, horizontal, flat horizontal screw fixing 215 mm
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit • in switching position • recommended fastening method height width	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W 8.2656 W 25 ms 35 ms Vertical, horizontal, flat horizontal screw fixing 215 mm 294 mm
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit vin switching state ON with bypass circuit • in switching bypass circuit	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W 8.2656 W 25 ms 35 ms Vertical, horizontal, flat horizontal screw fixing 215 mm 294 mm
supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC rated value • at DC control current at DC • in standby mode of operation • during operation power loss [W] in auxiliary and control circuit • in switching state OFF with bypass circuit • in switching state ON with bypass circuit • in switching method height width depth	24 V 30 V 26.5 V 31.6 V DC 20.4 28.8 V 24 V 20.4 28.8 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 1.9872 W 8.2656 W 25 ms 35 ms vertical, horizontal, flat horizontal screw fixing 215 mm 294 mm 159 mm

during operation	-25 +55 °C
during storage	-40 +70 °C
during storage ort	-40 +70 °C
elative humidity during operation	10 95 %
protocol is supported	10 93 78
PROFIBUS DP protocol	No
PROFINET protocol	No
design of the interface	
AS-Interface protocol	Yes
PROFINET protocol	No
PROFIBUS DP protocol	No
product function bus communication	Yes
protocol is supported AS-Interface protocol	Yes
product function control circuit interface with IO link	No
ype of electrical connection of the communication interface	M12 plug
ype of electrical connection	
for main current circuit	plug according to ISO 23570, HAN Q4/2
for auxiliary and control circuit	connector
ype of electrical connection	
1 for digital input signals	M12 socket
1 for digital output signals	M12 socket
2 for digital input signals	M12 socket
3 for digital input signals	M12 socket
4 for digital input signals	M12 socket
ype of electrical connection	
at the manufacturer-specific device interface	optical interface
 for device addressing 	M12 plug
for supply voltage line-side	M12 plug
ull-load current (FLA) for 3-phase AC motor at 480 V rated value	11 A
vielded mechanical performance [hp]	
• for 3-phase AC motor	
— at 220/230 V rated value	3 hp
— at 460/480 V rated value	7.5 hp
operating voltage at AC at 60 Hz according to CSA and UL ated value	480 V
ertificates/ approvals	
General Product Approval	EMC
Declaration of Conformity Test Certificat	tes other Dangerous Good
UK CA EG-Konf.	
irther information	

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875


Information- and Downloadcenter (Catalogs, Brochures,...)


https://www.siemens.com/ic10 Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1325-6LS71-3AA5

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1325-6LS71-3AA5 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RK1325-6LS71-3AA5 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1325-6LS71-3AA5&lang=en

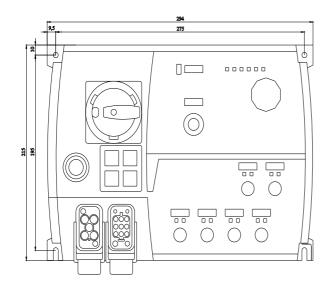

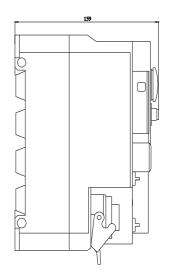

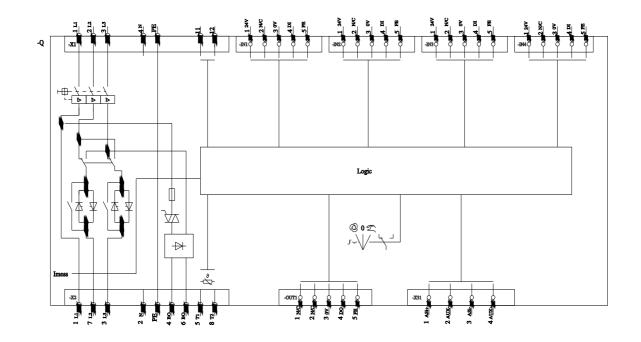

last modified:

8/9/2023 🖸