Data sheet

3RK1908-0AP00-0HP0



Base unit (BU30-MS8) with F-DI forwarding For ET 200SP motor starter With infeed 500 V Incl. infeed bus cover

product brand name	SIMATIC
·	Accessories
product designation	BaseUnit
product designation	
design of the product	with AC infeed, with F-DI loop-through
product type designation	ET 200SP
General technical data	500.1/
insulation voltage rated value	500 V
degree of pollution	2
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
between main and auxiliary circuit	500 V
shock resistance	6g / 11 ms
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	04/15/2016
SVHC substance name	Bleimonoxid (Bleioxid) - 1317-36-8
Safety related data	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe
Main circuit	
number of poles for main current circuit	3
type of voltage of the operating voltage	AC
type of voltage of the operating voltage	AC
operating voltage of the operating voltage	500 V
operating voltage rated value	500 V
operating voltage rated value operating voltage of AC supply	500 V 500 V
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value	500 V 500 V
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value Inputs/ Outputs	500 V 500 V 32 A; Derating, see Manual
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value Inputs/ Outputs number of digital inputs	500 V 500 V 32 A; Derating, see Manual
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value Inputs/ Outputs number of digital inputs Supply voltage	500 V 500 V 32 A; Derating, see Manual
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value Inputs/ Outputs number of digital inputs Supply voltage type of voltage of the supply voltage	500 V 500 V 32 A; Derating, see Manual 0
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value Inputs/ Outputs number of digital inputs Supply voltage type of voltage of the supply voltage supply voltage 1 at DC rated value	500 V 500 V 32 A; Derating, see Manual 0 DC 24 V
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value Inputs/ Outputs number of digital inputs Supply voltage type of voltage of the supply voltage supply voltage 1 at DC rated value • minimum permissible	500 V 500 V 32 A; Derating, see Manual 0 DC 24 V 20.4 V
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value Inputs/ Outputs number of digital inputs Supply voltage type of voltage of the supply voltage supply voltage 1 at DC rated value • minimum permissible • maximum permissible	500 V 500 V 32 A; Derating, see Manual 0 DC 24 V 20.4 V 28.8 V
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value Inputs/ Outputs number of digital inputs Supply voltage type of voltage of the supply voltage supply voltage 1 at DC rated value • minimum permissible • maximum permissible ampacity maximum	500 V 500 V 32 A; Derating, see Manual 0 DC 24 V 20.4 V 28.8 V
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value Inputs/ Outputs number of digital inputs Supply voltage type of voltage of the supply voltage supply voltage 1 at DC rated value • minimum permissible • maximum permissible ampacity maximum Installation/ mounting/ dimensions	500 V 500 V 32 A; Derating, see Manual 0 DC 24 V 20.4 V 28.8 V 7 A
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value Inputs/ Outputs number of digital inputs Supply voltage type of voltage of the supply voltage supply voltage 1 at DC rated value • minimum permissible • maximum permissible ampacity maximum Installation/ mounting/ dimensions mounting position	500 V 500 V 32 A; Derating, see Manual 0 DC 24 V 20.4 V 28.8 V 7 A vertical, horizontal
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value Inputs/ Outputs number of digital inputs Supply voltage type of voltage of the supply voltage supply voltage 1 at DC rated value • minimum permissible • maximum permissible ampacity maximum Installation/ mounting/ dimensions mounting position fastening method	500 V 500 V 32 A; Derating, see Manual 0 DC 24 V 20.4 V 28.8 V 7 A vertical, horizontal DIN rail
operating voltage rated value operating voltage of AC supply operational current at AC at 400 V rated value Inputs/ Outputs number of digital inputs Supply voltage type of voltage of the supply voltage supply voltage 1 at DC rated value • minimum permissible • maximum permissible ampacity maximum Installation/ mounting/ dimensions mounting position fastening method height	500 V 500 V 32 A; Derating, see Manual 0 DC 24 V 20.4 V 28.8 V 7 A vertical, horizontal DIN rail 215 mm

• upwards	50 mm
downwards	50 mm
Ambient conditions	00 11111
installation altitude at height above sea level maximum	4 000 m; For derating see manual
ambient temperature	
during operation	-25 +60 °C; For derating see manual
during storage	-40 +70 °C
during transport	-40 +70 °C
environmental category during operation according to IEC 60721	3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices)
relative humidity during operation	10 95 %
air pressure according to SN 31205	900 1 060 hPa
Connections/ Terminals	
type of electrical connection	
• for main current circuit	spring-loaded terminals (push-in)
for auxiliary and control circuit	spring-loaded terminals (push-in)
type of connecting terminal	Push-in terminal
type of connectable conductor cross-sections for supply	
• solid	1x 1 6 mm²
 finely stranded without core end processing 	1x 1 6 mm²
finely stranded with core end processing	1x 1 6 mm²
type of connectable conductor cross-sections	
for AWG cables for supply	1x 18 10
type of connectable conductor cross-sections for load-side outgoing feeder	
• solid	1x 0,5 2,5 mm ²
 finely stranded without core end processing 	1x 0,5 2,5 mm²
 finely stranded with core end processing 	1x 0,5 2,5 mm²
type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder	1x 20 12
shape of the screwdriver tip	Slot
size of the screwdriver tip	Standard screwdriver 0.6 mm x 3.5 mm
Certificates/ approvals	

Certificates/ approvals

General Product Approval EMC Declaration of Conformity Test Certificates

Confirmation









Type Test Certificates/Test Report

Marine / Shipping











Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1908-0AP00-0HP0

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1908-0AP00-0HP0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RK1908-0AP00-0HP0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1908-0AP00-0HP0\&lang=ender.pdf} \\ \underline{\text{http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1908-0AP00-0HP0\&lang=ender.pdf} \\ \underline{\text{http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1908-0AP00-0HP0&lang=ender.pdf} \\ \underline{\text{http://www.automation.siemens.com/bilddb/cax_de.aspx.pdf} \\ \underline{\text{http://www.automation.siem$

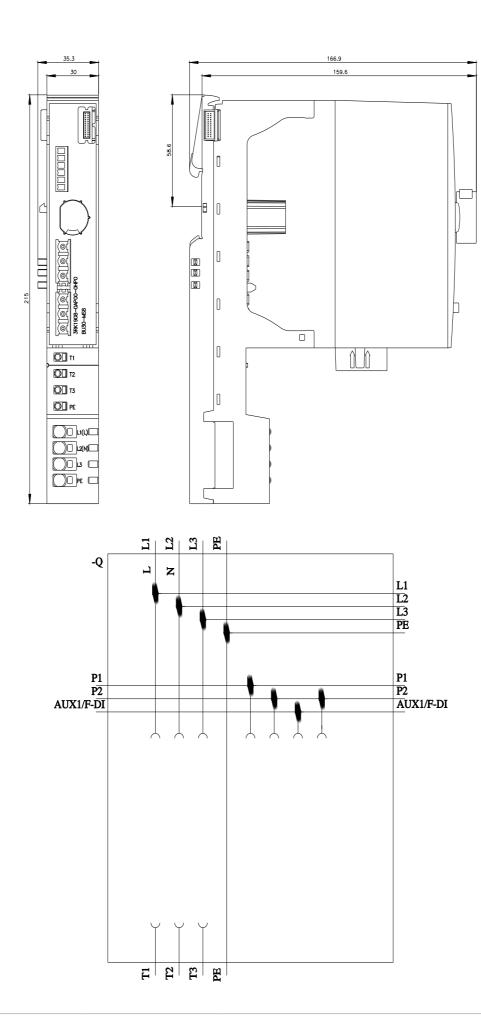

last modified: 9/5/2023 🖸

