SIEMENS

Data sheet

3RV2321-1BC10




Circuit breaker size S0 for starter combination Rated current 2 A N-release 26 A screw terminal Standard switching capacity


4/17 5/13	
product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For starter combinations
product type designation	3RV2
General technical data	
size of the circuit-breaker	S0
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	7.25 W
 at AC in hot operating state per pole 	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
 of the main contacts typical 	100 000
 of auxiliary contacts typical 	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Blei - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
operating voltage	
 rated value 	20 690 V
 at AC-3 rated value maximum 	690 V
 at AC-3e rated value maximum 	690 V
operating frequency rated value	50 60 Hz
operational current rated value	2 A
operational current	
• at AC-3 at 400 V rated value	2 A
• at AC-3e at 400 V rated value	2 A
operating power	


• at AC-3	
— at 230 V rated value	0.4 kW
— at 400 V rated value	0.8 kW
— at 500 V rated value	0.8 kW
— at 690 V rated value	1.1 kW
• at AC-3e	
— at 230 V rated value	0.4 kW
— at 400 V rated value	0.8 kW
— at 500 V rated value	0.8 kW
— at 690 V rated value	1.1 kW
operating frequency	
• at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
ground fault detection	No
phase failure detection	No
maximum short-circuit current breaking capacity (Icu)	
 at AC at 240 V rated value 	100 kA
 at AC at 400 V rated value 	100 kA
 at AC at 500 V rated value 	100 kA
 at AC at 690 V rated value 	10 kA
operating short-circuit current breaking capacity (Ics) at AC	
 at 240 V rated value 	100 kA
 at 400 V rated value 	100 kA
• at 500 V rated value	100 kA
• at 690 V rated value	10 kA
response value current of instantaneous short-circuit trip unit	26 A
III /CCA rotingo	
UL/CSA ratings	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	
full-load current (FLA) for 3-phase AC motor	2 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value	2 A 2 A
 full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value 	2 A 2 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp]	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor	2 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor	2 A 0.13 hp
 full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor at 230 V rated value for 3-phase AC motor at 460/480 V rated value 	2 A 0.13 hp 1 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value	2 A 0.13 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection	2 A 0.13 hp 1 hp 1 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection	2 A 0.13 hp 1 hp 1 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip	2 A 0.13 hp 1 hp 1 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection	2 A 0.13 hp 1 hp 1 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip	2 A 0.13 hp 1 hp 1 hp
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions	2 A 0.13 hp 1 hp 1 hp Yes magnetic
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position	2 A 0.13 hp 1 hp 1 hp Yes magnetic any
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method	2 A 0.13 hp 1 hp 1 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height	2 A 0.13 hp 1 hp 1 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width	2 A 0.13 hp 1 hp 1 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth	2 A 0.13 hp 1 hp 1 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor — at 230 V rated value • for 3-phase AC motor — at 460/480 V rated value — at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth	2 A 0.13 hp 1 hp 1 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor - at 230 V rated value • for 3-phase AC motor - at 460/480 V rated value - at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side	2 A 0.13 hp 1 hp 1 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor - at 230 V rated value • for 3-phase AC motor - at 460/480 V rated value - at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V	2 A 0.13 hp 1 hp 1 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor - at 230 V rated value • for 3-phase AC motor - at 460/480 V rated value - at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V - downwards	2 A 0.13 hp 1 hp 1 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor - at 230 V rated value • for 3-phase AC motor - at 460/480 V rated value - at 460/480 V rated value - at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V - downwards - upwards - at the side	2 A 0.13 hp 1 hp 1 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor - at 230 V rated value • for 3-phase AC motor - at 460/480 V rated value - at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V - downwards - upwards - at the side • for live parts at 400 V	2 A 0.13 hp 1 hp 1 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 9 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value yielded mechanical performance [hp] • for single-phase AC motor - at 230 V rated value • for 3-phase AC motor - at 460/480 V rated value - at 460/480 V rated value - at 575/600 V rated value Short-circuit protection product function short circuit protection design of the short-circuit trip Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting at the side • for grounded parts at 400 V - downwards - upwards - at the side	2 A 0.13 hp 1 hp 1 hp Yes magnetic any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm


— at the side	9 mm
 for grounded parts at 500 V 	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
 for live parts at 500 V 	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
 for grounded parts at 690 V 	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
 for live parts at 690 V 	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
arrangement of electrical connectors for main current	Top and bottom
circuit	
type of connectable conductor cross-sections	
 for main contacts 	
— solid or stranded	2x (1 2.5 mm²), 2x (2.5 10 mm²)
 finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
 for AWG cables for main contacts 	2x (16 12), 2x (14 8)
tightening torque	
 for main contacts with screw-type terminals 	2 2.5 N·m
design of screwdriver shaft	Diameter 5 to 6 mm
size of the screwdriver tip	Pozidriv size 2
design of the thread of the connection screw	
for main contacts	M4
Safety related data	
proportion of dangerous failures	
 with low demand rate according to SN 31920 	50 %
 with high demand rate according to SN 31920 	50 %
failure rate [FIT] with low demand rate according to SN 31920	50 FIT
B10 value with high demand rate according to SN 31920	5 000
T1 value for proof test interval or service life according to IEC 61508	10 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
display version for switching status	Handle
Approvals Certificates	
General Product Approval	Declaration of Conformity
Confirmation	
Test Certificates Marine / Shipp	ing

Marine / Shipping Image: Shipping market in the s	ental Con-		onfirmation		ailway /ibration and Shock
Confirmation Environme firmation Summers has decided to exit the Runtps://press.siemens.com/global/en/global/en/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen	ent		onfirmation	VDE VDE	<u>ibration and Shock</u>
Confirmation Environme firmation Summers has decided to exit the Runtps://press.siemens.com/global/en/global/en/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen/global/global/sen/global/sen/global/sen/global/sen/global/sen/global/sen	ental Con-				
firmat further information Siemens has decided to exit the Ro https://press.siemens.com/global/en/ Siemens is working on the renewa Please contact your local Siemens of EAC relevant market (other than the signing https://support.industry.siemens.com/ Information- and Downloadcenter (https://www.siemens.com/ic10 Industry Mall (Online ordering syste https://mall.industry.siemens.com/mall					
Siemens has decided to exit the Ro https://press.siemens.com/global/en/n Siemens is working on the renewa Please contact your local Siemens of EAC relevant market (other than the si Information on the packaging https://support.industry.siemens.com/ Information- and Downloadcenter (https://www.siemens.com/ic10 Industry Mall (Online ordering syst https://mall.industry.siemens.com/ma					
https://support.industry.siemens.com/ Information- and Downloadcenter (https://www.siemens.com/ic10 Industry Mall (Online ordering syst https://mall.industry.siemens.com/ma	pressrelease/siemens-win Il of the current EAC cert ffice on the status of validit	nd-down-russian-busin tificates. Ity of the EAC certifica	ation if you intend to impo	ort or offer to supply th	nese products to an
Industry Mall (Online ordering syst https://mall.industry.siemens.com/ma					
Cay apling gaparatar		mlfb=3RV2321-1BC1	<u>10</u>		
Cax online generator http://support.automation.siemens.co Service&Support (Manuals, Certific https://support.industry.siemens.com/		AQs,)	<u>=3RV2321-1BC10</u>		
Image database (product images, 2 http://www.automation.siemens.com/		2D models device		N macros,)	
Characteristic: Tripping characteris	/ <u>cs/ww/en/ps/3RV2321-1B</u> 2D dimension drawings,				
Further characteristics (e.g. electri http://www.automation.siemens.com/	//cs/ww/en/ps/3RV2321-18 2D dimension drawings, /bilddb/cax_de.aspx?mlfb= istics, l²t, Let-through cu	=3RV2321-1BC10&lar Irrent			

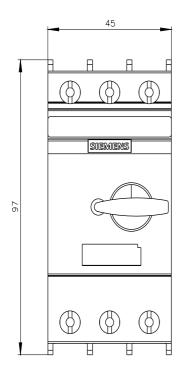

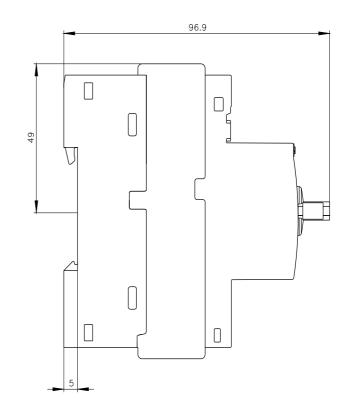

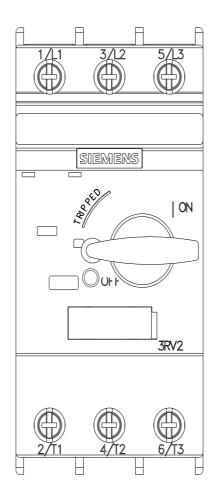

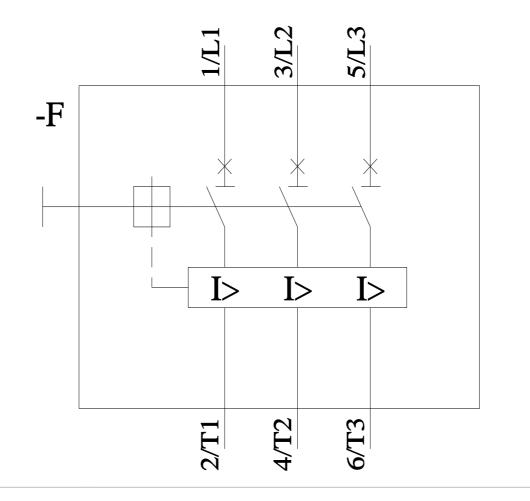

last modified:

9/1/2023 🖸