

CP A BATTERY 24V DC17AH**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



The Weidmüller battery modules consist of high-quality Panasonic batteries. These are sealed, maintenance-free lead-fleece batteries. The battery modules are fitted with a temperature sensor to provide optimum battery charging and battery life. This facilitates temperature-compensated charging of the batteries.

The neat design as well as the plug-in connections for the battery connection and the temperature sensor allow the batteries to be fitted safely and quickly.

General ordering data

Version	Battery
Order No.	1251110000
Type	CP A BATTERY 24V DC17AH
GTIN (EAN)	4050118043136
Qty.	1 pc(s).
Delivery status	This article will no longer be available in the future.
Available until	2021-07-31
Alternative product	2789930000

Creation date May 22, 2022 1:47:42 PM CEST

Catalogue status 06.05.2022 / We reserve the right to make technical changes.

CP A BATTERY 24V DC17AH

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	160 mm	Depth (inches)	6.299 inch
Height	178 mm	Height (inches)	7.008 inch
Width	242 mm	Width (inches)	9.528 inch
Net weight	13,330 g		

Temperatures

Storage temperature	-15 °C...40 °C	Ambient temperature	0°...+40°C (Charging); -15°...+50°C (Discharging)
Operating temperature	0 °C...40 °C		

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Operating interfaces and control inputs

Temperature probe NTC 100 kΩ

Input

Charging current, max.	2.55 A	Nominal capacity	17 Ah
Rated input voltage	24 V DC		

Output

Buffer time 10A	81 min	Buffer time 20A	34.2 min
Buffer time 40A	13.5 min	Output current, max.	50 A
Overload and short circuit protection	2x25 A fuse	Parallel connection option	Yes
Protection against inverse voltage	Yes	Temperature probe	NTC 100 kΩ

General data

Max. perm. air humidity (operational)	5 %...95 % RH	Operating temperature	0 °C...40 °C
Shock wall acc. to IEC 68227	30 g	Vibration DIN rail/wall in accordance with IEC 68-2-6	- / 0.7 g

Insulation coordination

Protection class III, with no ground connection, for SELV

Connection data (input)

Conductor cross-section, AWG/kcmil , max.	6	Conductor cross-section, AWG/kcmil , min.	22
Conductor cross-section, flexible , min.	0.5 mm ²	Conductor cross-section, rigid , max.	16 mm ²
Conductor cross-section, rigid , min.	0.2 mm ²	Wire connection cross section, flexible (input), max.	16 mm ²

CP A BATTERY 24V DC17AH

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data**Connection data (output)**

Conductor cross-section, AWG/kcmil , max.	6	Conductor cross-section, AWG/kcmil , min.	22
Conductor cross-section, flexible , max.	16 mm ²	Conductor cross-section, flexible , min.	0.5 mm ²
Conductor cross-section, rigid , max.	16 mm ²	Conductor cross-section, rigid , min.	0.2 mm ²
Number of terminals	2 (+ / -)		

Connection data (signal)

Number of terminals	2	Wire connection method	Pluggable screw connection
Wire cross-section, AWG/kcmil , max.	16	Wire cross-section, AWG/kcmil , min.	28
Wire cross-section, solid , max.	1.5 mm ²	Wire cross-section, solid , min.	0.2 mm ²

Approvals

Certificate no. (cULus)	E349959	Institute (cULus)	CULUS
-------------------------	---------	-------------------	-------

Classifications

ETIM 6.0	EC002850	ETIM 7.0	EC002850
ETIM 8.0	EC002850	ECLASS 9.0	27-04-06-92
ECLASS 9.1	27-04-92-01	ECLASS 10.0	27-04-06-92
ECLASS 11.0	27-04-06-92	ECLASS 12.0	27-04-06-92

Approvals

Approvals



ROHS	Conform
UL File Number Search	E349959

Downloads


Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD
User Documentation	Operating instructions
Catalogues	Catalogues in PDF-format

CP A BATTERY 24V DC17AH

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

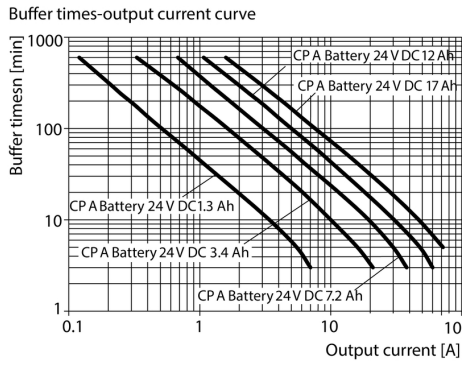

Buffer Time