


**Automation Products - u-remote IP20
UR20-PF-O**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image**10 A feeding; input or output current path;
diagnosis display**

Weidmüller power feed modules are available to refresh the power of the input and output current path. Monitored by the voltage diagnosis display, these feed 10 A in the corresponding input or output path. A time-saving start-up is guaranteed by the standard u-remote plug with proven and tested "PUSH IN" technology for reliable contacts. The power supply is monitored by a diagnosis display.

General ordering data

Type	UR20-PF-O
Order No.	1334740000
Version	Remote I/O module, IP20, Power supply unit, 24 VDC-Output
GTIN (EAN)	4050118138122
Qty.	1 pc(s).

Creation date July 8, 2020 8:04:57 AM CEST

Catalogue status 08.07.2020 / We reserve the right to make technical changes.

**Automation Products - u-remote IP20
UR20-PF-O**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Dimensions and weights**

Width	11.5	Width (inches)	0.453 inch
Height	120 mm	Height (inches)	4.724 inch
Depth	76 mm	Depth (inches)	2.992 inch
Mounting dimension - height	128 mm	Net weight	76 g

Temperatures

Operating temperature, max.	60 °C	Operating temperature, min.	-20 °C
Storage temperature, max.	85 °C	Storage temperature, min.	-40 °C
Operating temperature	-20 °C ... +60 °C	Storage temperature	-40 °C ... +85 °C

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Connection data

Type of connection	PUSH IN	Wire connection cross section, finely stranded, max.	1.5 mm ²
Wire connection cross-section, finely stranded, min.	0.14 mm ²	Wire cross-section, finely stranded, max. (AWG)	AWG 16
Wire cross-section, finely stranded, min. (AWG)	AWG 26	Wire cross-section, solid, max.	1.5 mm ²
Wire cross-section, solid, max. (AWG)	AWG 16	Wire cross-section, solid, min.	0.14 mm ²
Wire cross-section, solid, min. (AWG)	AWG 26		

General data

Air humidity (operation)	10% to 95%, non-condensing as per DIN EN 61131-2	Air humidity (storage)	10% to 95%, non-condensing as per DIN EN 61131-2
Air humidity (transport)	10% to 95%, non-condensing as per DIN EN 61131-2	Air pressure (operation)	≥ 795 hPa (height ≤ 2000 m) as per DIN EN 61131-2
Air pressure (storage)	1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2	Air pressure (transport)	1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2
Pollution severity	2	Shock	15 g over 11 ms, half sinus wave, acc. to IEC 60068-2-27
Surge voltage category	II	Test voltage	500 V
UL 94 flammability rating	V-0	Vibration resistance	5 Hz ≤ f ≤ 8.4 Hz: 3.5-mm amplitude as per IEC 60068-2-6, 8.4 Hz ≤ f ≤ 150 Hz: 1 g acceleration as per IEC 60068-2-6

Power supply

Current consumption from I _{OUT} (the respective power segment)	< 10 mA	Feed current for I _{OUT} (output current path) , max.	10,000 mA
Supply voltage for outputs	24 V DC +20 %/ -15 %		

Automation Products - u-remote IP20 UR20-PF-O

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

System data

Field bus protocol	CANopen, DeviceNet, EtherCAT, EtherNet/IP, Modbus/TCP, PROFINET IRT, PROFIBUS DP-V1, POWERLINK	Interface	u-remote system bus
Module type	Power-feed module		

Classifications

ETIM 6.0	EC001600	ETIM 7.0	EC001600
eClass 9.0	27-24-26-10	eClass 9.1	27-24-26-10
eClass 10.0	27-24-26-10		

Approvals

Approvals



WATEXIECEX

ROHS	Conform
------	---------

Downloads


Approval/Certificate/Document of Conformity	Declaration of Conformity Compass safe distance certificate Lloyds Register certificate DNV/GL certificate ABS certificate RINA certificate Bureau Veritas - Type Approval Certificate PRS (Polish Register of Shipping) NIPPON KAIJI KYOKAI Certificate
Engineering Data	WSCAD, Zuken E3.S, EPLAN
Engineering Data	STEP
User Documentation	MAN U-REMOTE_DE MAN U-REMOTE_EN

**Automation Products - u-remote IP20
UR20-PF-O**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

Block diagram

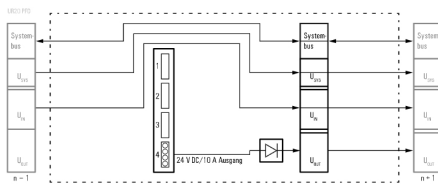

Connection diagram

