

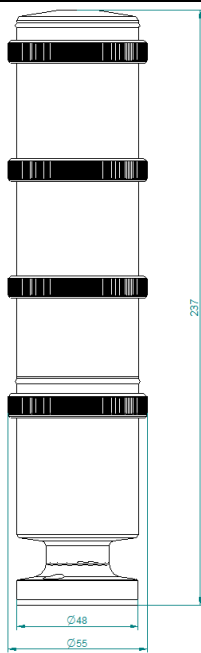
MINI TWS LIGHT TOWER 3 COLOURS



Torretta di segnalazione luminosa
Luminous warning STACK LIGHT.
Colonne de signalisation lumineuse.
Signalsäule
Columna luminosa.

CORPO BODY CORPS GEHAUSE CUERPO DEL PRODUCTO	PC								
GHIERA RING BAGUE	PC								
GRUPPO OTTICO LUMINOUS SOURCE SOURCE LUMINEUSE LICHTQUELLE FUENTE DE LUZ	N°4 LED								
COLORI DISPONIBILI AVAILABLE COLOURS COULEURS DISPONIBLES VERFÜGBARE FARBEN COLORES DISPONIBLE									
TENSIONE DI ALIMENTAZIONE VOLTAGE TENSION SPANNUNG TENSIÓN	24 Vac/dc – 110 Vac - 240 Vac								
SERVIZIO OPERATION FONCTIONNEMENT BETRIEBSART FUNCIONAMIENTO	∞								
CORRENTE NOMINALE CURRENT CONSUMPTION CONSOMMATION DE COURANT STROMAUFNAHME CONSUMO DE CORRIENTE	<table border="1"> <thead> <tr> <th></th> <th>24 Vac/dc</th> <th>110 Vac</th> <th>240 Vac</th> </tr> </thead> <tbody> <tr> <td>MAX (mA)</td> <td>90</td> <td>195</td> <td>165</td> </tr> </tbody> </table>		24 Vac/dc	110 Vac	240 Vac	MAX (mA)	90	195	165
	24 Vac/dc	110 Vac	240 Vac						
MAX (mA)	90	195	165						
RESA LUMINOSA LIGHT OUTPUT RENDEMENT LUMINEUX LICHT LEISTUNG SALIDA DE LUZ	<table border="1"> <thead> <tr> <th>ALL COLOR Cd(p)</th> <th>3</th> <th>2</th> <th>1</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	ALL COLOR Cd(p)	3	2	1				
ALL COLOR Cd(p)	3	2	1						
MODALITA' LUCE LIGHT EFFECT EFFET LUMINEUX LICHTEFFEKT EFECTO LUMINOSO	Fissa - Lampeggiante <i>Steady - Flashing</i> <i>Fixe - Clignotante</i> <i>Dauerlicht - Blink</i> <i>Luz fija - Intermitente</i>								
GRADO IP IP RATING DEGRE IP SCHUTZART	IP66								

Dati diffusi a solo scopo informativo. Sirena S.p.A. puo' modificare i dati in qualsiasi momento senza preavviso.
 These data are disclosed only for information purposes. Sirena S.p.A. reserves the right to modify them at any time without prior notice.
 Les données ne sont divulguées qu'à titre d'information. Sirena S.p.A. se réserve la faculté de les modifier à tout moment sans préavis

<p>GRADO IP</p>	
<p>TEMPERATURA DI FUNZIONAMENTO <i>OPERATING TEMPERATURE</i> <i>TEMPERATURE DE SERVICE</i> <i>BETRIEBSTEMPERATUR</i> <i>TEMPERATURA DE FUNCIONAMIENTO</i></p>	<p>-30°C+50°C</p>
<p>VIBRAZIONI <i>VIBRATIONS</i> <i>VIBRATIONS</i> <i>VIBRATIONEN</i> <i>VIBRACIONES</i></p>	<p>INDUSTRIAL CEI 60068-2-6 SINE</p>
<p>CERTIFICAZIONI, OMOLOGAZIONI <i>CERTIFICATIONS, APPROVALS</i> <i>CERTIFICATIONS, HOMOLOGATIONS</i> <i>PRODUKTZERTIFIKATE, ZULASSUNGEN</i> <i>CERTIFICADOS, HOMOLOGACIONES</i></p>	<p>CE, UL</p>
<p>FISSAGGIO <i>MOUNTING</i> <i>FIXATION</i> <i>FIXIERUNG</i> <i>FIJACIÓN</i></p>	<p>Ghiera <i>Ring</i> <i>Bague</i> <i>Ring</i> <i>Contera</i></p>
<p>DISEGNO <i>TECHNICAL DRAWING</i> <i>DESSIN</i> <i>TECHNISCHE ZEICHNUNG</i> <i>DIBUJO TECNICO</i></p>	

COLLEGAMENTO ELETTRICO

ELECTRICAL WIRING
RACCORDEMENT ELECTRIQUE
ELEKTRISCHE VERBINDUNG
CONEXIÓN ELÉCTRICA

