



ET 200 RSM Maintenance switch module Up to 25 A Up to 25 A Disconnecter function for Main circuit Han Q4/2

product brand name	SIMATIC
product designation	Motor starters
design of the product	maintenance switch
product type designation	ET 200pro
General technical data	
product function on-site operation	Yes
insulation voltage rated value	400 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between main and auxiliary circuit	400 V
protection class IP	IP65
shock resistance	15g / 11 ms
type of assignment	1
reference code according to IEC 81346-2	Q
Substance Prohibition (Date)	05/01/2012
SVHC substance name	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 Bleitanzirkonoxid - 12626-81-2
product component motor brake output	No
product feature	
• brake control with 230 V AC	No
• brake control with 400 V AC	No
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
product function short circuit protection	Yes
design of short-circuit protection	circuit-breakers
maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	50 000 A
Safety related data	
performance level (PL) according to EN ISO 13849-1	e
category according to EN ISO 13849-1	4
T1 value for proof test interval or service life according to IEC 61508	10 a
touch protection against electrical shock	finger-safe
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	25 ... 25 A
type of voltage	AC
operating voltage rated value	200 ... 400 V

operating range relative to the operating voltage at AC at 50 Hz	200 ... 440 V
operational current	
• at AC at 400 V rated value	25 A
• at AC-3 at 400 V rated value	25 A
Inputs/ Outputs	
product function	
• digital inputs parameterizable	No
• digital outputs parameterizable	No
number of digital inputs	0
number of sockets	
• for digital output signals	0
• for digital input signals	0
Supply voltage	
type of voltage of the supply voltage	DC
supply voltage 1 at DC	24 ... 24 V
supply voltage 1 at DC rated value	
• minimum permissible	20.4 V
• maximum permissible	28.8 V
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	20.4 ... 28.8 V
control supply voltage 1	
• at DC rated value	20.4 ... 28.8 V
• at DC	24 ... 24 V
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw fixing
height	230 mm
width	110 mm
depth	170 mm
Ambient conditions	
installation altitude at height above sea level maximum	3 500 m
ambient temperature	
• during operation	-25 ... +55 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity during operation	5 ... 95 %
Communication/ Protocol	
protocol is supported	
• PROFIBUS DP protocol	Yes
• PROFINET protocol	Yes
design of the interface PROFINET protocol	Yes
product function bus communication	Yes
protocol is supported AS-Interface protocol	No
product function	
• supports PROFenergy measured values	No
• supports PROFenergy shutdown	No
address space memory of address range	
• of the inputs	1 byte
• of the outputs	0 byte
type of electrical connection of the communication interface	via backplane bus
Connections/ Terminals	
type of electrical connection	
• for main current circuit	tab terminals
type of electrical connection	
• 1 for digital input signals	M12 socket
• 2 for digital input signals	M12 socket
• 3 for digital input signals	M12 socket
• 4 for digital input signals	M12 socket
type of electrical connection	

- at the manufacturer-specific device interface
- for main energy infeed
- for load-side outgoing feeder
- for main energy transmission
- for supply voltage line-side
- for supply voltage transmission

optical interface
 socket according to ISO23570
 socket according to ISO23570
 socket according to ISO23570
 via backplane bus
 via backplane bus

UL/CSA ratings

operating voltage at AC at 60 Hz according to CSA and UL rated value	600 V
--	-------

Certificates/ approvals

General Product Approval	EMC	Declaration of Con- formity
---------------------------------	------------	--



[Confirmation](#)



Declaration of Con- formity	Test Certificates	other
--	--------------------------	--------------



EG-Konf.

[Type Test Certificates/Test Report](#)

[Confirmation](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-0HS00-6AA0>

Cax online generator



<http://support.automation.siemens.com/WWW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-0HS00-6AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-0HS00-6AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1304-0HS00-6AA0&lang=en

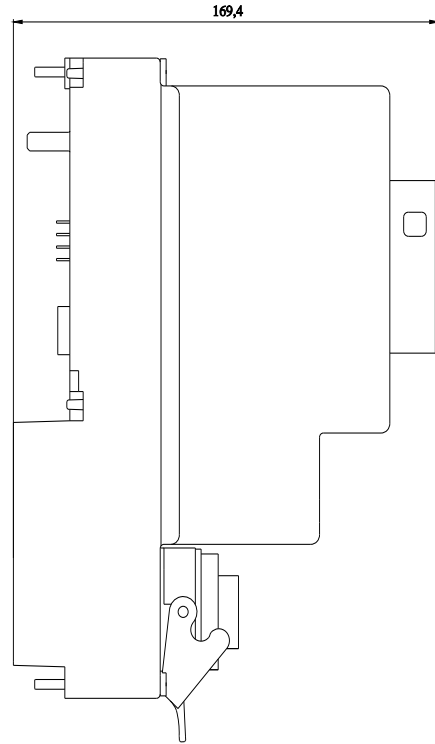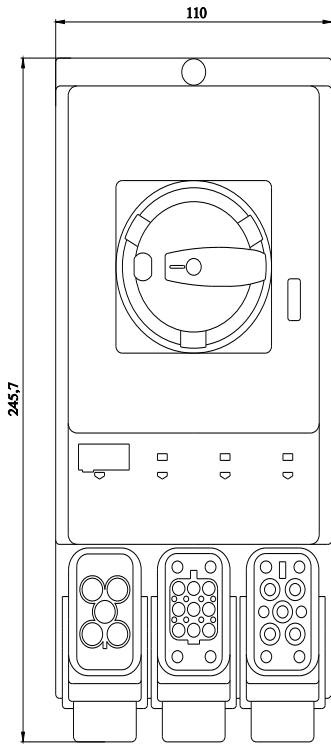

last modified:

8/7/2023 