## **SIEMENS**

## **Data sheet**





product brand name	SIRIUS ACT	
product designation	Twin pushbuttons	
design of the product	Actuating/signaling element	
product type designation	3SU1	
product line	Plastic, black, 22 mm	
Enclosure		
number of command points	1	
Actuator		
design of the actuating element	Flat buttons	
principle of operation of the actuating element	momentary contact type	
product extension optional		
<ul> <li>light source</li> </ul>	No	
contact module	Yes	
color of the actuating element	green / red	
material of the actuating element	plastic	
shape of the actuating element	oval	
Front ring		
product component front ring	Yes	
design of the front ring	Standard	
material of the front ring	plastic	
color of the front ring	black	
General technical data		
protection class IP	IP66, IP67, IP69(IP69K)	
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13	
shock resistance		
<ul> <li>according to IEC 60068-2-27</li> </ul>	sinusoidal half-wave 15g / 11 ms	
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B	
operating frequency maximum	3 600 1/h	
mechanical service life (operating cycles) typical	2 000 000	
reference code according to IEC 81346-2	S	
Substance Prohibitance (Date)	10/01/2014	
Ambient conditions		
ambient temperature		
<ul> <li>during operation</li> </ul>	-25 +70 °C	
during storage	-40 +80 °C	
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)	
Environmental footprint		
Environmental Product Declaration(EPD)	Yes	
Global Warming Potential [CO2 eq] total	0.787 kg	

Global Warming Potential [CO2 eq] during manufacturing	0.566 kg
Global Warming Potential [CO2 eq] during operation	0.235 kg
global warming potential [CO2 eq] after end of life	-0.015 kg
Installation/ mounting/ dimensions	
height	57.7 mm
width	29.8 mm
shape of the installation opening	round
mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm
mounting height	14.4 mm
installation width	29.9 mm
installation depth	25.7 mm
Approvals Certificates	

Approvals Certificates

**General Product Approval** 

**Declaration of Conformity** 



Confirmation









**Test Certificates** 

Marine / Shipping

Type Test Certificates/Test Report

Special Test Certificate









other Environment

Confirmation

Environmental Confirmations

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1000-3AB42-0AA0

Cax online generator


 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3SU1000-3AB42-0AA0}\\$ 


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1000-3AB42-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SU1000-3AB42-0AA0&lang=en

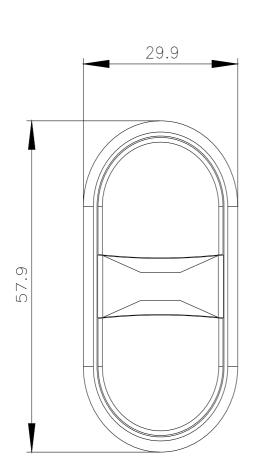

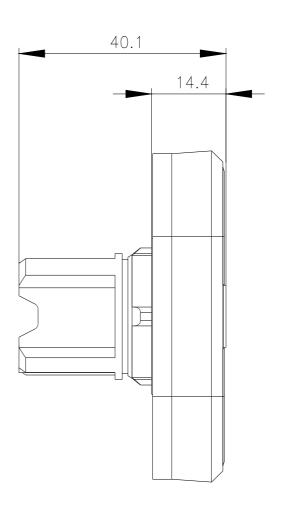

last modified: 11/4/2023 🖸