## SIEMENS

## Data sheet

## 3SU1001-1BA20-0AA0



Illuminated mushroom pushbutton, 22 mm, round, plastic, red, 40 mm, latching, Pull-to-unlatch mechanism

product brand name	SIRIUS ACT			
product designation	Mushroom pushbuttons			
design of the product	Actuating/signaling element			
product type designation	3SU1			
product line	Plastic, black, 22 mm			
Enclosure				
number of command points	1			
Actuator				
design of the actuating element	illuminated			
principle of operation of the actuating element	latching			
product extension optional light source	Yes			
color of the actuating element	red			
material of the actuating element	plastic			
shape of the actuating element	round			
outer diameter of the actuating element	40 mm			
type of unlocking device	pull-to-unlatch mechanism			
number of switching positions	2			
Front ring				
product component front ring	Yes			
design of the front ring	Standard			
material of the front ring	plastic			
color of the front ring	black			
General technical data				
product function				
EMERGENCY OFF function	No			
EMERGENCY STOP function	No			
protection class IP	IP66, IP67, IP69(IP69K)			
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13			
shock resistance				
<ul> <li>according to IEC 60068-2-27</li> </ul>	sinusoidal half-wave 15g / 11 ms			
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B			
operating frequency maximum	1 800 1/h			
mechanical service life (operating cycles) typical	500 000			
reference code according to IEC 81346-2	S			
Substance Prohibitance (Date)	10/01/2014			
Ambient conditions				
ambient temperature				
<ul> <li>during operation</li> </ul>	-25 +70 °C			
during storage	-40 +80 °C			
environmental category during operation according to IEC	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)			

60721		
Installation/ mounting/ dimensions		
height	40 mm	
width	40 mm	
shape of the installation opening	round	
mounting diameter	22.3 mm	
positive tolerance of installation diameter	0.4 mm	
mounting height	27.5 mm	
installation width	40 mm	
installation depth	24.4 mm	
Approvals Certificates		


General Product Approval

**Declaration of Conformity** 

(SP)	<u>Confirmation</u>		EHC	CE EG-Konf.	UK CA
Test Certificates		Marine / Shipping			
<u>Type Test Certific-</u> ates/Test Report	<u>Special Test Certific-</u> <u>ate</u>	ABS	Lloyd's Register urs	PRS	RINA
other	Environment				
Confirmation	Environmental Con- firmations				

Siemens has dec	ided to exit the Russian market (see here).
https://press.sieme	ns.com/global/en/pressrelease/siemens-wind-down-russian-business
Please contact yo	ng on the renewal of the current EAC certificates. Ir local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to tet (other than the sanctioned EAEU member states Russia or Belarus).
Information on th https://support.ind	e packaging <u>istry.siemens.com/cs/ww/en/view/109813875</u>
Information- and https://www.sieme	Downloadcenter (Catalogs, Brochures,…) <u>ns.com/ic10</u>
	line ordering system) y.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1001-1BA20-0AA0
Cax online gener	ator mation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1001-1BA20-0AA0
	(Manuals, Certificates, Characteristics, FAQs,)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1001-1BA20-0AA0 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SU1001-1BA20-0AA0&lang=en

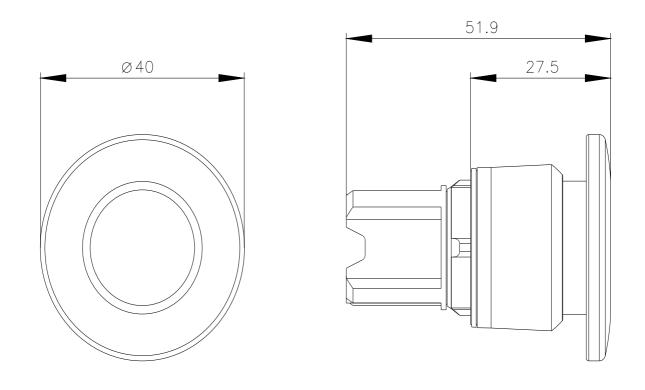

last modified:

1/27/2022 🖸