SIEMENS

Data sheet

3SU1001-3AB42-0AA0



Illuminated twin pushbutton, 22 mm, round, plastic, green, red, pushbuttons, flat

product brand name	SIRIUS ACT			
product designation	Twin pushbuttons			
design of the product	Actuating/signaling element			
product type designation	3SU1			
product line	Plastic, black, 22 mm			
Enclosure				
number of command points	1			
Actuator				
design of the actuating element	Flat buttons, illuminated			
principle of operation of the actuating element	momentary contact type			
product extension optional				
light source	Yes			
contact module	Yes			
color of the actuating element	green / red			
material of the actuating element	plastic			
shape of the actuating element	oval			
Front ring				
product component front ring	Yes			
design of the front ring	Standard			
material of the front ring	plastic			
color of the front ring	black			
General technical data				
protection class IP	IP66, IP67, IP69(IP69K)			
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13			
shock resistance				
 according to IEC 60068-2-27 	sinusoidal half-wave 15g / 11 ms			
 for railway applications according to EN 61373 	Category 1, Class B			
operating frequency maximum	3 600 1/h			
mechanical service life (operating cycles) typical	2 000 000			
reference code according to IEC 81346-2	S			
Substance Prohibitance (Date)	10/01/2014			
Ambient conditions				
ambient temperature				
during operation	-25 +70 °C			
during storage	-40 +80 °C			
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)			
Environmental footprint				
Environmental Product Declaration(EPD)	Yes			
Global Warming Potential [CO2 eq] total	0.787 kg			

Clabel Marriag D-t			~			
Global Warming Potential [CO2 eq] during manufacturing						
Global Warming Potential [CO2 eq] during operation			•			
global warming potential [CO2 eq] after end of life nstallation/ mounting/ dimensions		-0.015	кд			
	aimensions					
height		57.9 m				
width		29.9 m	m			
shape of the installation opening			round			
mounting diameter			22.3 mm			
positive tolerance of installation diameter		0.4 mm				
mounting height			14.4 mm			
installation width		29.9 m				
installation depth	allation depth 25.7 mm		m			
pprovals Certificates						
General Product Approval			Declaration of Conformity			
(A)	<u>Confirmation</u>		EHC	CE EG-Konf.	UK CA	
Test Certificates		Marine / Shipping				
Type Test Certific- ates/Test Report	Special Test Certific- ate		Lloyds	6		
	_	ABS	urs	PRS	RINA	
other	Environment	ABS	LRS	PRS	RINA	

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-winddown-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10 Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1001-3AB42-0AA0


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1001-3AB42-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1001-3AB42-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1001-3AB42-0AA0&lang=en

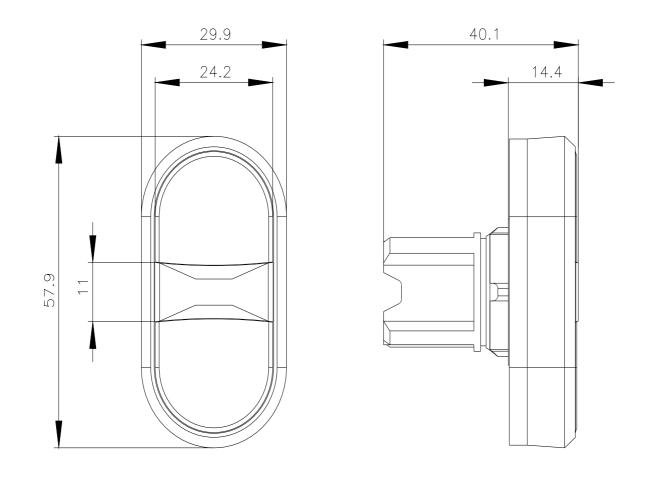

last modified:

11/4/2023 🖸