SIEMENS

Data sheet

3SU1051-1CA50-0AA0



Illuminated mushroom pushbutton, 22 mm, round, metal, shiny, blue, 60 mm, latching, Pull-to-unlatch mechanism

product brand name	SIRIUS ACT				
product designation	Mushroom pushbuttons				
design of the product	Actuating/signaling element				
product type designation	3SU1				
product line	Metal, shiny, 22 mm				
Enclosure					
number of command points	1				
Actuator					
design of the actuating element	illuminated				
principle of operation of the actuating element	latching				
product extension optional light source	Yes				
color of the actuating element	blue				
material of the actuating element	plastic				
shape of the actuating element	round				
outer diameter of the actuating element	60 mm				
type of unlocking device	pull-to-unlatch mechanism				
number of switching positions	2				
Front ring					
product component front ring	Yes				
design of the front ring	Standard				
material of the front ring	Metal, high gloss				
color of the front ring	silver				
General technical data					
product function					
 EMERGENCY OFF function 	No				
EMERGENCY STOP function	No				
protection class IP	IP66, IP67, IP69(IP69K)				
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13				
shock resistance					
 according to IEC 60068-2-27 	sinusoidal half-wave 15g / 11 ms				
vibration resistance					
according to IEC 60068-2-6	10 500 Hz: 5g				
operating frequency maximum	1 800 1/h				
mechanical service life (operating cycles) typical	500 000				
reference code according to IEC 81346-2	S				
Substance Prohibitance (Date)	10/01/2014				
Ambient conditions					
ambient temperature					
during operation	-25 +70 °C				
during storage	-40 +80 °C				

	_					
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with	relative air humidity of 10 95%)				
Installation/ mounting/ dimensions						
height	60 mm					
width	60 mm					
shape of the installation opening	round					
mounting diameter	22.3 mm					
positive tolerance of installation diameter	0.4 mm					
mounting height	27.5 mm					
installation width	60 mm					
installation depth	24.4 mm					
Approvals Certificates						
General Product Approval		Declaration of Conformity				













Test Certificates		Marine / Shipping			
Type Test Certific- ates/Test Report	<u>Special Test Certific-</u> <u>ate</u>	ABS	Lloyds Register uxs	PRS	RINA
other	Environment				

Confirmation

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1051-1CA50-0AA0

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1051-1CA50-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1051-1CA50-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1051-1CA50-0AA0&lang=en

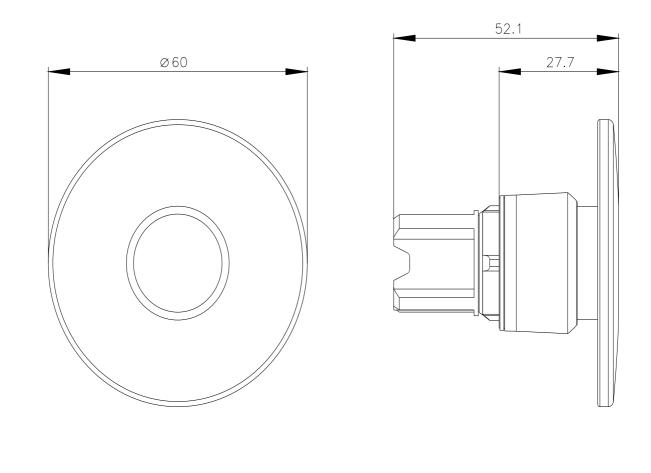

last modified:

