SIEMENS

Data sheet



Indicator lights, 22 mm, round, plastic, clear, lens, smooth, with holder, LED module, with integrated LED 230 V AC, Spring-type terminal

product brand name	SIRIUS ACT	
product designation	Indicator lights	
design of the product	Complete unit	
product type designation	3SU1	
product line	Plastic, black, 22 mm	
manufacturer's article number		
of supplied LED module	3SU1401-1BF60-3AA0	
 of the supplied holder 	3SU1550-0AA10-0AA0	
of supplied repeater	3SU1001-6AA70-0AA0	
Enclosure		
number of command points	1	
Actuator		
product extension optional light source	Yes	
color		
of the actuating element	clear	
material of the actuating element	plastic	
shape of the actuating element	round	
outer diameter of the actuating element	29.45 mm	
Front ring		
product component front ring	No	
Holder		
material of the holder	Plastic	
Display		
number of LED modules	1	
General technical data		
product component light source	Yes	
insulation voltage rated value	320 V	
degree of pollution	3	
surge voltage resistance rated value	4 kV	
protection class IP	IP66, IP67, IP69(IP69K)	
of the terminal	IP20	
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13	
shock resistance		
• according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms	
 for railway applications according to EN 61373 	Category 1, Class B	
reference code according to IEC 81346-2	Р	
Substance Prohibitance (Date)	10/01/2014	
SVHC substance name	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 2-Methyl-1-(4-methylthiophenyl)-2-morpho - 71868-10-5	

Supply voltage		
	AC	
type of voltage of the supply voltage of the light source	AC	
supply voltage of the light source at AC	220.1/	
at 50 Hz rated value at 60 Hz rated value	230 V	
	230 V	
at 60 Hz rated value	230 230 V	
relative negative tolerance of the supply voltage	20 %	
relative positive tolerance of the supply voltage	20 %	
Control circuit/ Control	0.4	
inrush current maximum	3 A	
Connections/ Terminals		
type of electrical connection	other	
of modules and accessories	Spring-type terminal	
type of connectable conductor cross-sections	0 (0.07	
solid without core end processing	2x (0.25 1.5 mm²)	
finely stranded with core end processing	2x (0.25 0.75 mm²)	
finely stranded without core end processing	2x (0.25 1.5 mm²)	
• for AWG cables	2x (24 16)	
tightening torque of the screws in the bracket	1 1.2 N·m	
Lamp		
type of light source	LED	
color of the light source	white	
light intensity	900 1 400 mcd	
Ambient conditions		
ambient temperature		
 during operation 	-25 +70 °C	
during storage	-40 +80 °C	
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95 operation permitted for all devices behind front panel)	5%, no condensation in
Environmental footprint		
Environmental Product Declaration(EPD)	Yes	
Global Warming Potential [CO2 eq] total	0.787 kg	
Global Warming Potential [CO2 eq] during manufacturing	0.566 kg	
Global Warming Potential [CO2 eq] during operation	0.235 kg	
global warming potential [CO2 eq] after end of life	-0.015 kg	
Installation/ mounting/ dimensions		
fastening method	front plate mounting	
 of modules and accessories 	Front plate mounting	
height	40 mm	
width	30 mm	
shape of the installation opening	round	
mounting diameter	22.3 mm	
positive tolerance of installation diameter	0.4 mm	
mounting height	11.8 mm	
installation width	29.5 mm	
installation depth	49.7 mm	
Approvals Certificates		
General Product Approval		Declaration of Conformity



Confirmation









Declaration of Conformity

Test Certificates

Marine / Shipping



Type Test Certificates/Test Report









other	Environment

<u>Confirmation</u> <u>Environmental Confirmations</u>

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1106-6AA70-3AA0

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1106-6AA70-3AA0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3SU1106-6AA70-3AA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1106-6AA70-3AA0&lang=en







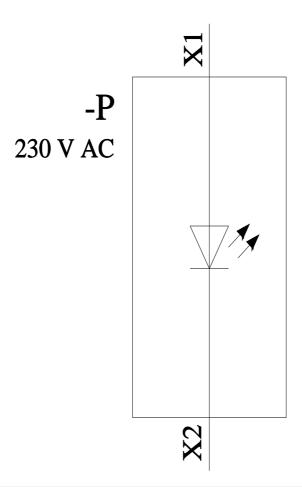

last modified: 11/8/2023 🖸