



SIRIUS ACT with PROFINET: fail-safe interface module with 4 DI, 1 DQ (24 V DC), 1 AI (12-bit A/D resolution), 24 V DC, screw terminal, front plate mounting, 1 to 20 terminal modules connectable

product brand name	SIRIUS ACT
product designation	Fail-safe interface module for PROFINET
product type designation	3SU1
Display	
display version	
<ul style="list-style-type: none"> for diagnostic function: Supply voltage monitoring power LED 	Yes
<ul style="list-style-type: none"> status Tx/Rx link 	Yes
General technical data	
product function	
<ul style="list-style-type: none"> reverse polarity protection 	Yes; With polarity change, DI1 ... DI4 may not be connected to (M) pole
<ul style="list-style-type: none"> diagnostics function 	Yes
<ul style="list-style-type: none"> alarms 	Yes
<ul style="list-style-type: none"> I&M data 	Yes; I&M0 ... I&M3
firmware version	2.1.4
hardware version	1
configuration function with dataset	Yes
software version with STEP 7 in the TIA Portal required	Integrated in TIA Portal Version 14 SP1 or higher (HSP for V13 and V14)
number of units per rack maximum	20
number of submodules per station maximum	24
power loss [W] typical	0.67 W
insulation voltage rated value	30 V
degree of pollution	3
type of voltage	
<ul style="list-style-type: none"> of the operating voltage 	DC
<ul style="list-style-type: none"> of the input voltage 	DC
surge voltage resistance rated value	0.8 kV
consumed current	
<ul style="list-style-type: none"> maximum 	100 mA
<ul style="list-style-type: none"> rated value 	28 mA
protection class IP	IP20, clamping screw tightened
shock resistance	
<ul style="list-style-type: none"> according to IEC 60068-2-27 	sinusoidal half-wave 15g / 11 ms
<ul style="list-style-type: none"> for railway applications according to EN 61373 	Category 1, Class B
vibration resistance	
<ul style="list-style-type: none"> according to IEC 60068-2-6 	10 ... 500 Hz: 5g
<ul style="list-style-type: none"> for railway applications according to EN 61373 	Category 1, Class B
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	12/19/2016
SVHC substance name	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8

	2-Methyl-1-(4-methylthiophenyl)-2-morpho - 71868-10-5 Bleititanzirkonoxid - 12626-81-2 2,2',6,6'-Tetrabrom-4,4'-isopropylidendi - 79-94-7
operating voltage rated value	20.4 V
I2t value	0.008 A ² ·s
Supply voltage	
supply voltage at DC rated value	24 V
Communication/ Protocol	
protocol is supported	
• PROFINET IO protocol	Yes
• PROFI-safe protocol	Yes
product function at the Ethernet interface	
• Autocrossover	Yes
• Autonegotiation	Yes
protocol at the 1st interface media redundancy protocol	No
product function at the 1st interface PROFINET IO device	Yes
product function of the PROFINET IO device is supported	No
PROFINET system redundancy	
service as PROFINET IO device	
• prioritized startup	No
• isochronous mode	No
• supports Shared Device	No
• supports PROFIenergy	No
• IRT	No
• MRP	No
• MRPD	No
service for open IE communication	
• LLDP	Yes
• SNMP	Yes
• TCP/IP	Yes
GSD version/revision with PROFINET required	V2.34
transmission mode for Industrial Ethernet	PROFINET with 100 Mbps full duplex (100BASE-TX)
network load class according to PROFINET	1
specification for Security Level 1 test according to PROFINET	Resilient to network loading
Control circuit/ Control	
inrush current maximum	16 A
Galvanic isolation	
galvanic isolation between PROFINET and all other circuits	Yes
Inputs/ Outputs	
number of digital inputs	4
• safety-related	0
number of analog inputs	1
number of digital outputs	1
Connections/ Terminals	
type of electrical connection	screw-type terminals
connectable conductor cross-section for auxiliary contacts	
• solid or stranded	0.2 ... 2.5 mm ²
• finely stranded with core end processing	2.5 mm ²
connectable conductor cross-section	
• solid	0.2 ... 2.5 mm ²
• solid with core end processing	0.2 ... 2.5 mm ²
• finely stranded with core end processing	0.25 ... 2.5 mm ²
• finely stranded without core end processing	0.2 ... 2.5 mm ²
AWG number as coded connectable conductor cross section	30 ... 12
tightening torque with screw-type terminals	0.5 ... 0.6 N·m
Safety related data	
service life maximum	20 a
IEC 62061	
PFHD with high demand rate according to EN 62061	5.951E-10 1/h
ISO 13849	

performance level (PL) according to ISO 13849-1	e
category according to ISO 13849-1	4

IEC 61508	
Safety Integrity Level (SIL) according to IEC 61508	3
PFDavg with low demand rate according to IEC 61508	2.426E-6
Safe failure fraction (SFF)	99.6 %
T1 value according to IEC 61508	1 a

Interfaces	
design of the interface	
<ul style="list-style-type: none"> Ethernet interface Fast Ethernet interface 	Yes; for Ethernet services Yes; PROFINET with 100 Mbps
interface design 1	
<ul style="list-style-type: none"> integrated switch RJ45 (Ethernet) 	No Yes
number of ports at the 1st interface	1
number of interfaces according to PROFINET	1

Ambient conditions	
ambient temperature	
<ul style="list-style-type: none"> during operation during storage 	-25 ... +60 °C -40 ... +80 °C
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted)
explosion protection marking for intrinsic safety of related equipment EEx ia	No
explosion protection marking for intrinsic safety of related equipment EEx ib	No

Environmental footprint	
Environmental Product Declaration (EPD)	Yes
Global Warming Potential [CO2 eq] total	0.787 kg
Global Warming Potential [CO2 eq] during manufacturing	0.566 kg
Global Warming Potential [CO2 eq] during operation	0.235 kg
global warming potential [CO2 eq] after end of life	-0.015 kg

Installation/ mounting/ dimensions	
fastening method of modules and accessories	Front plate mounting
height	80.1 mm
width	40 mm
depth	72.1 mm

Approvals Certificates		
General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity

[Confirmation](#)



[Type Examination Certificate](#)



Test Certificates	other	Environment
-------------------	-------	-------------

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)

[PROFIsafe-Certification](#)

[Environmental Confirmations](#)

Further information

Siemens has decided to exit the Russian market (see here).
<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.
 Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1400-1LL10-1BA1>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1400-1LL10-1BA1>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1400-1LL10-1BA1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1400-1LL10-1BA1&lang=en

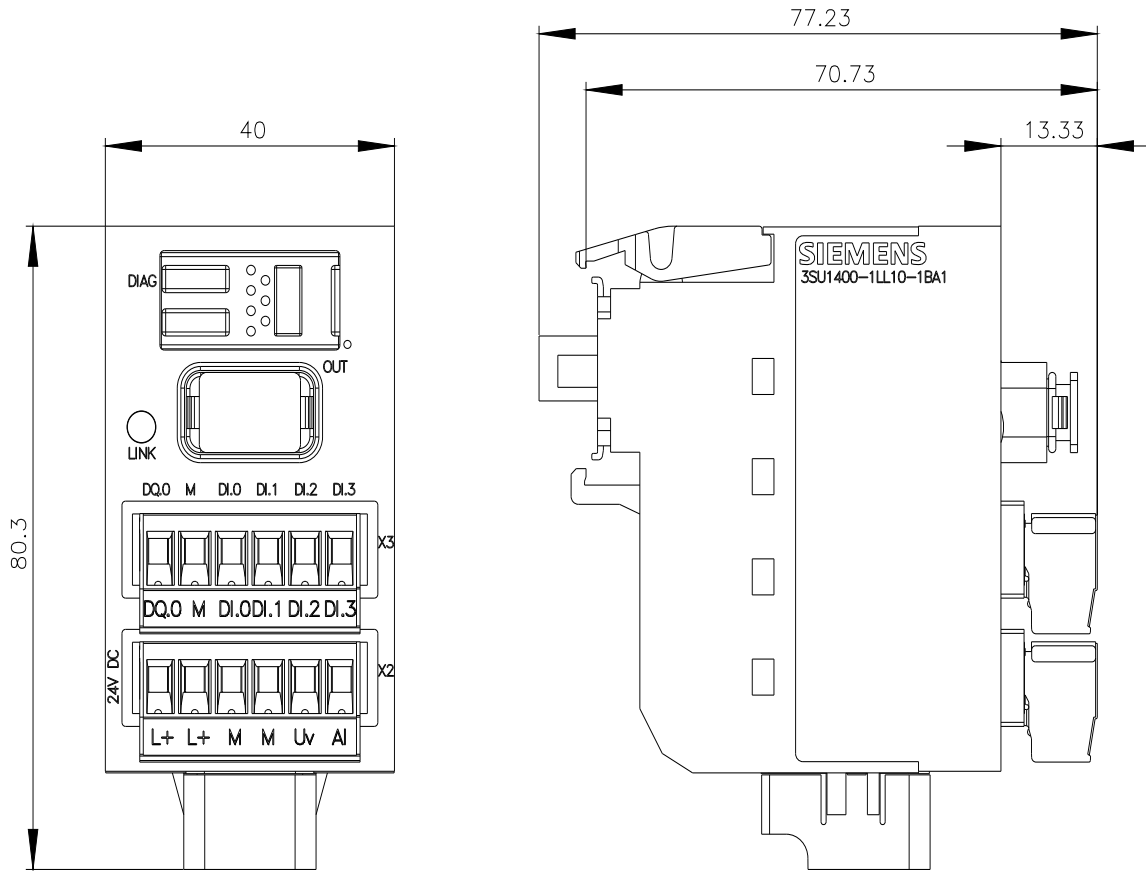

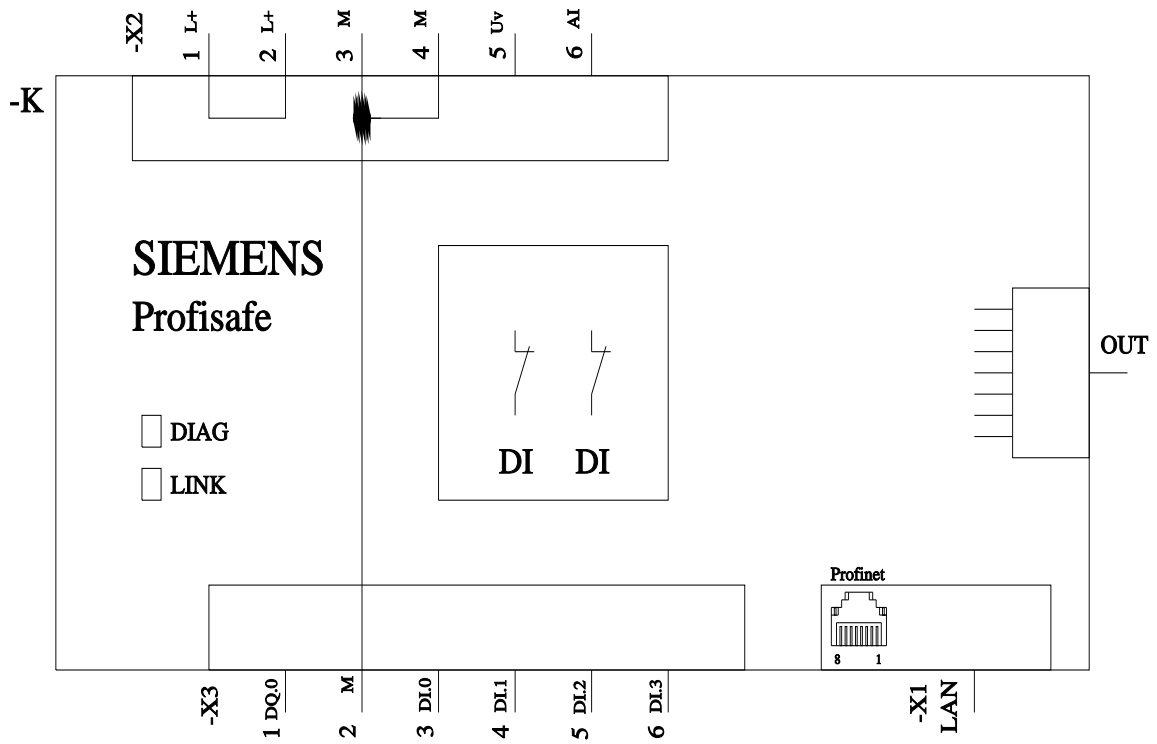

last modified:

11/9/2023 