SIEMENS

Data sheet

3SU1400-2DA43-1AA0



Support terminal, green/yellow, screw terminal, for floor mounting

product brand name	SIRIUS ACT	
product designation	Support terminal	
product type designation	3SU1	
General technical data		
suitability for integration	yes	
degree of pollution	3	
surge voltage resistance rated value	6 kV	
protection class IP		
of the enclosure	IP40	
of the terminal	IP20	
reference code according to IEC 81346-2	S	
Substance Prohibitance (Date)	10/01/2014	
Connections/ Terminals		
type of electrical connection	screw-type terminals	
 of modules and accessories 	Screw-type terminal	
Ambient conditions		
ambient temperature		
during operation	-25 +70 °C	
during storage	-40 +80 °C	
Environmental footprint		
Environmental Product Declaration(EPD)	Yes	
011 1111 : 5 1 (:11000 1111		
Global Warming Potential [CO2 eq] total	0.787 kg	
Global Warming Potential [CO2 eq] total Global Warming Potential [CO2 eq] during manufacturing	0.787 kg 0.566 kg	
	<u> </u>	
Global Warming Potential [CO2 eq] during manufacturing	0.566 kg	
Global Warming Potential [CO2 eq] during manufacturing Global Warming Potential [CO2 eq] during operation	0.566 kg 0.235 kg	
Global Warming Potential [CO2 eq] during manufacturing Global Warming Potential [CO2 eq] during operation global warming potential [CO2 eq] after end of life	0.566 kg 0.235 kg	
Global Warming Potential [CO2 eq] during manufacturing Global Warming Potential [CO2 eq] during operation global warming potential [CO2 eq] after end of life Installation/ mounting/ dimensions	0.566 kg 0.235 kg -0.015 kg	
Global Warming Potential [CO2 eq] during manufacturing Global Warming Potential [CO2 eq] during operation global warming potential [CO2 eq] after end of life Installation/ mounting/ dimensions fastening method of modules and accessories	0.566 kg 0.235 kg -0.015 kg Floor mounting	
Global Warming Potential [CO2 eq] during manufacturing Global Warming Potential [CO2 eq] during operation global warming potential [CO2 eq] after end of life Installation/ mounting/ dimensions fastening method of modules and accessories height	0.566 kg 0.235 kg -0.015 kg Floor mounting 33.2 mm	
Global Warming Potential [CO2 eq] during manufacturing Global Warming Potential [CO2 eq] during operation global warming potential [CO2 eq] after end of life Installation/ mounting/ dimensions fastening method of modules and accessories height width	0.566 kg 0.235 kg -0.015 kg Floor mounting 33.2 mm 9.8 mm	

Confirmation









Type Test Certificates/Test Report

Marine / Shipping other Environment









Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1400-2DA43-1AA0


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1400-2DA43-1AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3SU1400-2DA43-1AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1400-2DA43-1AA0&lang=en

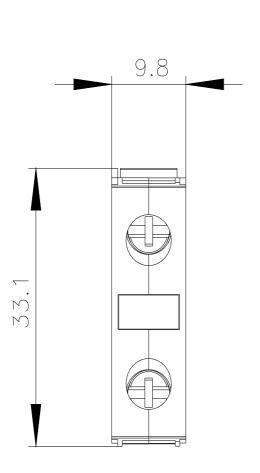

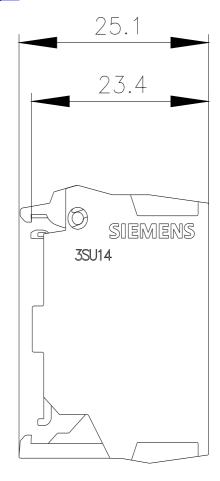

last modified:

11/9/2023

