## SIEMENS

## Data sheet

## 3SU1401-1BC24-3AA0



LED module w. indicator lights with integrated LED 110 V AC, red-yellow-green, spring-loaded terminal, for front plate mounting

product brand name	SIRIUS ACT
product designation	LED module
product type designation	3SU1
General technical data	
product component	
• diode	Yes
lamp transformer	No
light source	Yes
series resistor	No
insulation voltage rated value	320 V
degree of pollution	3
type of voltage of the operating voltage	AC/DC
for actuation	AC/DC
surge voltage resistance rated value	4 kV
consumed current maximum	20 mA
protection class IP	
<ul> <li>of the enclosure</li> </ul>	IP40
<ul> <li>of the terminal</li> </ul>	IP20
shock resistance	
<ul> <li>according to IEC 60068-2-27</li> </ul>	sinusoidal half-wave 15g / 11 ms
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B
vibration resistance	
<ul> <li>according to IEC 60068-2-6</li> </ul>	10 500 Hz: 5g
<ul> <li>for railway applications according to EN 61373</li> </ul>	Category 1, Class B
operating period typical	100 000 h
reference code according to IEC 81346-2	Р
Substance Prohibitance (Date)	10/01/2014
SVHC substance name	Bleimonoxid (Bleioxid) - 1317-36-8 2-Methyl-1-(4-methylthiophenyl)-2-morpho - 71868-10-5
operating voltage 1	
• at AC	
— at 50 Hz rated value	110 V
at DC rated value	110 V
relative positive tolerance of the operating voltage	20 %
relative negative tolerance of the operating voltage	10 %
Control circuit/ Control	
inrush current maximum	2 A
Connections/ Terminals	
type of electrical connection	spring-loaded terminals
type of connectable conductor cross-sections	

			0v (0.0F 1.Fm	a ma <sup>2</sup> )		
<ul> <li>solid without core</li> </ul>			2x (0.25 1.5 n			
	ith core end processing		2x (0.25 0.75			
-	ithout core end processin	g	2x (0.25 1.5 n	nm²)		
for AWG cables			2x (24 16)	•		
end processing	cross-section finely strand	led with core	0.25 0.75 mm	2		
Lamp				_		
type of light source			LED			
color of the light sour			red/yellow/ gree	n		
certificate of suitabilit	у					
• ATEX			No			
• IECEx			No			
Ambient conditions						
ambient temperature						
<ul> <li>during operation</li> </ul>			-25 +70 °C			
<ul> <li>during storage</li> </ul>			-40 +80 °C			
environmental category 60721	environmental category during operation according to IEC		3M6, 3S2, 3B2, operation permit		ative air humidity of 10	. 95%, no condensation in
Environmental footprint						
Environmental Product			Yes			
Global Warming Potent	· · ·		0.787 kg			
	ial [CO2 eq] during manuf	acturing	0.566 kg			
	ial [CO2 eq] during opera		0.235 kg			
	I [CO2 eq] after end of life		-0.015 kg			
Installation/ mounting/ o			3			
fastening method						
<ul> <li>of modules and a</li> </ul>	Iccessories		Front plate mou	ntina		
height			36 mm	nung		
width			9.8 mm			
depth			49.7 mm			
Approvals Certificates		_	49.7 11111	_	_	
General Product Appr	roval		EMC		Declaration of Con	formity
Confirmation	(m)	гпг		a	UK	66
		t M L	2	RCM	ĈÂ	EG-Konf.
Test Certificates		Marine / Shippi	ng			
Special Test Certific- ate	Type Test Certific- ates/Test Report		Re	loyd's egister		
		ABS		LRS	PRS	RINA
other	Environment					
Confirmation	Environmental Con- firmations					
Further information						
Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business						
	Siemens is working on the renewal of the current EAC certificates.					
Please contact your loc EAC relevant market (o	al Siemens office on the s ther than the sanctioned I	tatus of validity of	the EAC certificati		nd to import or offer to s	upply these products to an
Information on the packaging						


Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-1BC24-3AA0 Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1401-1BC24-3AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3SU1401-1BC24-3A

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SU1401-1BC24-3AA0&lang=en

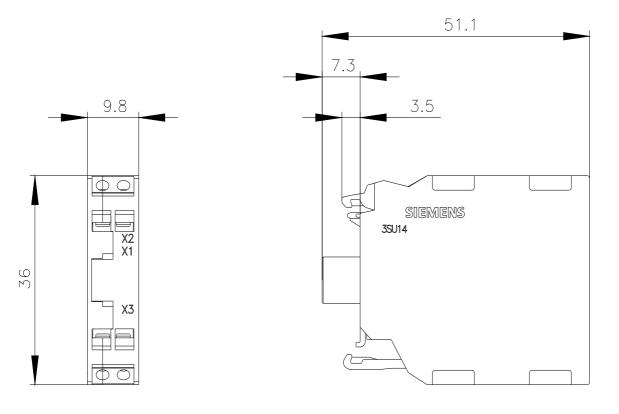

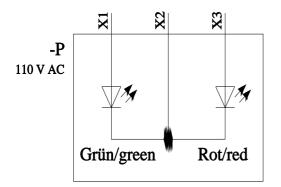

X1	X2	X3	Farbe/color
X	X		Grün/green
	X	X	Rot/red
X	X	X	Gelb/yellow

last modified:

11/9/2023 🖸