



DC load monitoring relay for PROFINET, max. 1x63 A DC, max. 60 V Width: 45.0 mm Monitoring for violation of upper and lower limit of current, voltage and power; energy consumption counter, energy recovery counter, switching cycle counter, operating hours counter warning and alarm thresholds auto-reset or manual reset ON delay 0-999.0 sec, OFF delay 0-999.0 sec, automatic reclosing delay 0-999.0 sec Supply voltage: 24 VDC 1 change-over contact, screw terminal

product brand name	SIRIUS
product designation	DC load monitoring relay
design of the product	for PROFINET
product type designation	3UG5
<b>General technical data</b>	
type of current for monitoring	DC
product function	DC load monitoring relay
power loss [W] maximum	3 W
insulation voltage	
<ul style="list-style-type: none"> <li>for overvoltage category II according to IEC 60664 with degree of pollution 3 rated value</li> </ul>	600 V
<ul style="list-style-type: none"> <li>for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value</li> </ul>	300 V
<ul style="list-style-type: none"> <li>of the auxiliary and control circuit for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value</li> </ul>	30 V
type of voltage for monitoring	DC
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
<ul style="list-style-type: none"> <li>between auxiliary and auxiliary circuit</li> </ul>	24 V
<ul style="list-style-type: none"> <li>between control and auxiliary circuit</li> </ul>	24 V
protection class IP	
<ul style="list-style-type: none"> <li>on the front</li> </ul>	IP20
<ul style="list-style-type: none"> <li>of the terminal</li> </ul>	IP00
shock resistance according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) for relay outputs maximum	100 000
<ul style="list-style-type: none"> <li>note</li> </ul>	0.5 A 125 V AC, with resistive load up to 40 °C
thermal current of the switching element with contacts maximum	1 A
certificate of suitability	CE
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	05/31/2019
SVHC substance name	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 2-Methyl-1-(4-methylthiophenyl)-2-morpho - 71868-10-5
<b>Product Function</b>	
product function	
<ul style="list-style-type: none"> <li>overvoltage detection DC</li> </ul>	Yes
<ul style="list-style-type: none"> <li>undervoltage detection DC</li> </ul>	Yes
<ul style="list-style-type: none"> <li>overcurrent detection DC</li> </ul>	Yes
<ul style="list-style-type: none"> <li>undercurrent detection DC</li> </ul>	Yes

<ul style="list-style-type: none"> <li>• auto-RESET</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• manual RESET</li> </ul>	Yes
<b>Supply voltage</b>	
<b>type of voltage of the supply voltage</b>	DC
<b>supply voltage 1 at DC rated value</b>	24 V
operating range factor supply voltage rated value at DC	0.85 ... 1.15
<b>Measuring circuit</b>	
<b>measurable current</b>	-63 ... +63 A
<b>measurable voltage at DC</b>	0 ... 60 V
<b>adjustable voltage range</b>	0 ... 60 V
<b>adjustable current response value current</b>	
<ul style="list-style-type: none"> <li>• 1</li> </ul>	-63 ... +63 A
<b>adjustable response delay time</b>	
<ul style="list-style-type: none"> <li>• when starting</li> </ul>	0 ... 999 s
<ul style="list-style-type: none"> <li>• with lower or upper limit violation</li> </ul>	0 ... 999 s
<b>response time maximum</b>	100 ms
<b>relative temperature-related measurement deviation</b>	0.5 %
<b>internal resistance of the measuring circuit</b>	10 mΩ
<b>Communication/ Protocol</b>	
<b>protocol is supported</b>	
<ul style="list-style-type: none"> <li>• PROFINET IO protocol</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Address Resolution Protocol (ARP)</li> </ul>	Yes
design of the interface Fast Ethernet interface	Yes
number of interfaces according to PROFINET	1
product function at the Ethernet interface Autocrossover	Yes
interface design 1 RJ45 (Ethernet)	Yes
product function at the 1st interface PROFINET IO device	Yes
<b>number of ports at the 1st interface</b>	1
service for open IE communication LLDP	Yes
<b>transmission mode for Industrial Ethernet</b>	PROFINET with 100 Mbps full duplex (100BASE-TX)
<b>PROFINET conformity class</b>	A
<b>network load class according to PROFINET</b>	1
<b>Auxiliary circuit</b>	
number of CO contacts for auxiliary contacts	1
<b>ampacity of the output relay at DC-13</b>	
<ul style="list-style-type: none"> <li>• at 24 V</li> </ul>	1 A
<b>ampacity for overcurrent duration &lt; 1 s maximum permissible</b>	1 A
<b>continuous current of the DIAZED fuse link of the output relay</b>	2 A
<b>Electromagnetic compatibility</b>	
<b>conducted interference</b>	
<ul style="list-style-type: none"> <li>• due to burst according to IEC 61000-4-4</li> </ul>	2 kV
<ul style="list-style-type: none"> <li>• due to conductor-earth surge according to IEC 61000-4-5</li> </ul>	2 kV
<ul style="list-style-type: none"> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV
<b>field-based interference according to IEC 61000-4-3</b>	10 V/m
<b>electrostatic discharge according to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge
<b>Galvanic isolation</b>	
<b>design of the electrical isolation</b>	Protective separation
<b>galvanic isolation</b>	
<ul style="list-style-type: none"> <li>• between input and output</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• between the voltage supply and other circuits</li> </ul>	Yes
<b>Connections/ Terminals</b>	
<b>product component removable terminal for main circuit</b>	No
<b>product component removable terminal for auxiliary and control circuit</b>	Yes
<b>type of electrical connection</b>	screw-type terminals
type of connectable conductor cross-sections for main contacts	
<ul style="list-style-type: none"> <li>• solid</li> </ul>	2x (1 ... 16 mm <sup>2</sup> ), 1x (1 ... 16 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• stranded</li> </ul>	2x (1 ... 16 mm <sup>2</sup> ), 1x (1 ... 16 mm <sup>2</sup> )

<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>	2x (1 ... 25 mm <sup>2</sup> ), 1x (1 ... 35 mm <sup>2</sup> )
<b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>for AWG cables for auxiliary contacts</li> </ul>	1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> ) 2x (0,5 ... 1,5 mm <sup>2</sup> ), 1x (0,5 ... 4 mm <sup>2</sup> ) 1x (20 ... 12), 2x (20 ... 14)
<b>tightening torque</b> <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> <li>for auxiliary contacts with screw-type terminals</li> </ul>	3 ... 4.5 N·m 0.6 ... 0.8 N·m

### Installation/ mounting/ dimensions

<b>mounting position</b>	any
<b>fastening method</b>	screw and snap-on mounting onto 35 mm DIN rail
<b>height</b>	100 mm
<b>width</b>	45 mm
<b>depth</b>	141.6 mm
<b>required spacing</b> <ul style="list-style-type: none"> <li>with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul>	0 mm 0 mm 50 mm 50 mm 0 mm 0 mm 0 mm 50 mm 3 mm 50 mm 0 mm 0 mm 50 mm 50 mm 3 mm

### Ambient conditions

installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b> <ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> <li>during transport</li> </ul>	-25 ... +60 °C -40 ... +80 °C -40 ... +80 °C

### Approvals Certificates

General Product Approval	Declaration of Con- formity	Test Certificates	other
--------------------------	--------------------------------	-------------------	-------

[Confirmation](#)



[Type Test Certificates/Test Report](#)

[Confirmation](#)

### other

[Declaration of Con-  
formity](#)



### Further information

Siemens has decided to exit the Russian market (see here).  
<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAFU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG5462-1AA41>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG5462-1AA41>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3UG5462-1AA41>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UG5462-1AA41&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG5462-1AA41&lang=en)

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3UG5462-1AA41/manual>

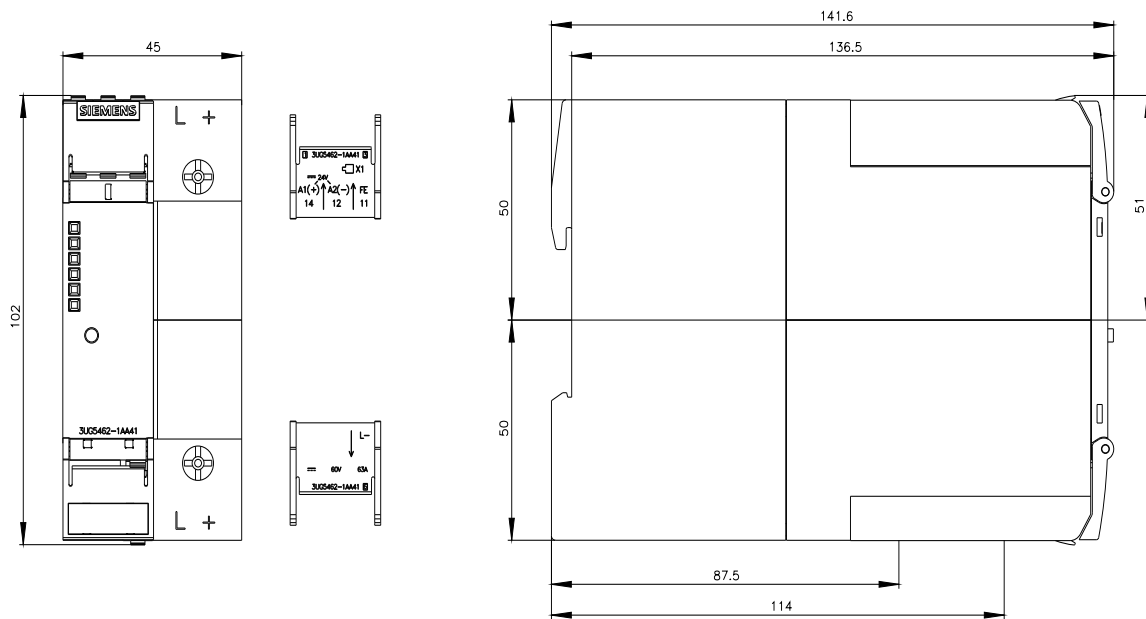

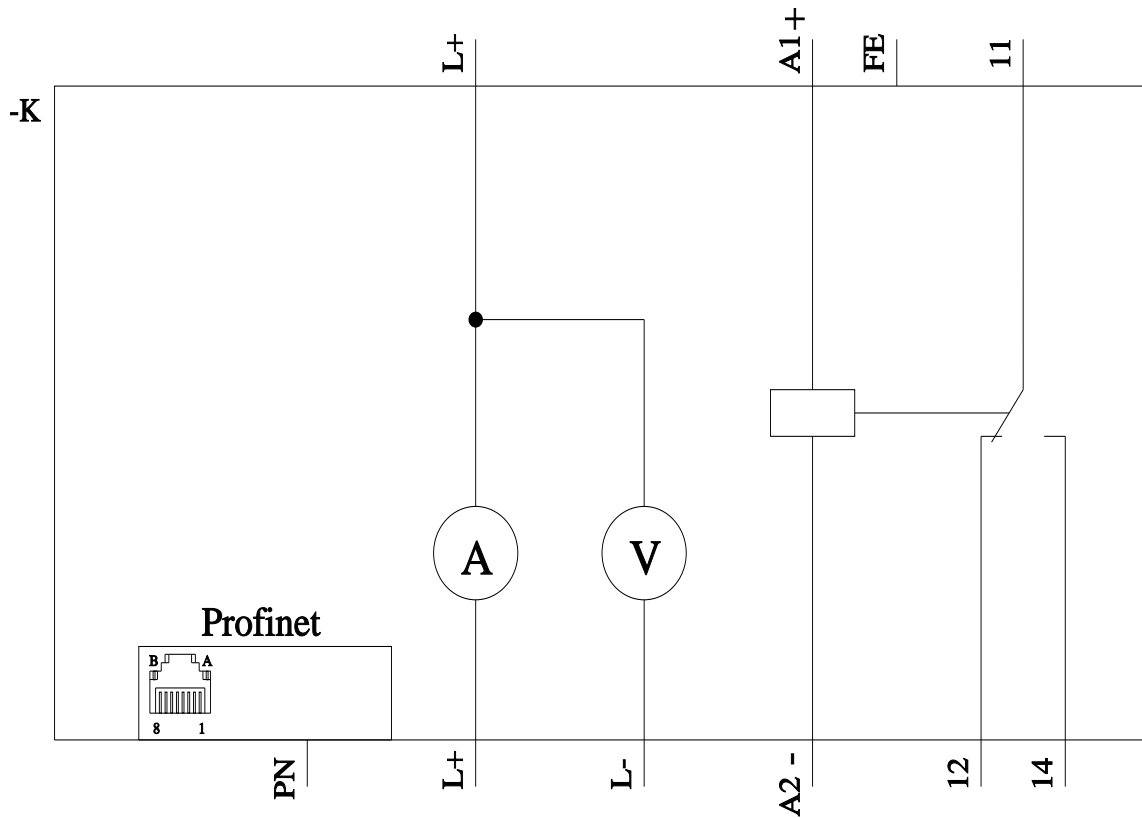

last modified:

8/11/2023 