

stripLite SL 4000

Energy efficient LED enclosure lighting

UNIVERSAL USE

Wide voltage range
24 V- 265 V AC / DC

MOTION SENSOR

Sensitive sensor with
5 minute setting

TOUGH HOUSING

Polycarbonate housing

ROCKER SWITCH

CONNECTOR OPTIONS

Wieland plug or push-wire type connectors

DAISY CHAIN

Daisy chain cables available to connect multiple lights

MOUNTING

Integrated magnets or plastic clips (provided)

PUSH TO RELEASE

Applicable to both Wieland and push-wire type connectors





stripLite SL-4000			
Type	24 - 265 V	12 V	120 - 230 V
Order no. with motion sensor, Wieland	400000	400012	400076
Order no. with motion sensor, push fit	400400	400412	n/a
Order no. with ON/OFF switch, Wieland	400100	400112	400176
Order no. with ON/OFF switch, push fit	400500	400512	n/a
PERFORMANCE DATA			
Power Consumption	4 Watt		8 Watt
Light output (luminous flux)	400 Lm	300 Lm	700 Lm
Light color / temperature	Cool white / 6,500K		
Lamp type	LED, 120° angle		
Life time (@ 20°C)	50,000 hrs.		
Operating temp. range	-30°C - +70°C -22°F - 158°F		
Switch off time (motion sensor)	5 min.		
DIMENSIONS			
Dimensions (L x W x H)	357,4 x 32 x 35,5 (31,16) mm 14,07 x 1,26 x 1,40 (1,23) inch		
Material housing	PC clear (Top), PC blue (Base)	PC frosted (Top), PC blue (Base)	
Weight	140 gr. 0,30 lbs.		
ELECTRICAL DATA			
Voltage / Frequency	24 - 265 V AC / DC ~ 50/60 Hz	12 V DC	120 - 230 V AC / DC ~ 50/60 Hz
Protection class	II (double insulated)		
IP protection to IEC 60 529	IP 20		
Mounting	Magnets, clips		
Max daisy chain number of lights	16	8	12
Certification	CE, cURus		

MAIN FEATURES

- Combined AC & DC voltage range allows the universal use with a single model
- Motion sensor or ON/OFF switch available
- Various fitting options for more flexibility
- Daisy chain cables available to connect multiple lights
- Wieland or push fit connector for fast and easy installation

Light distribution curve

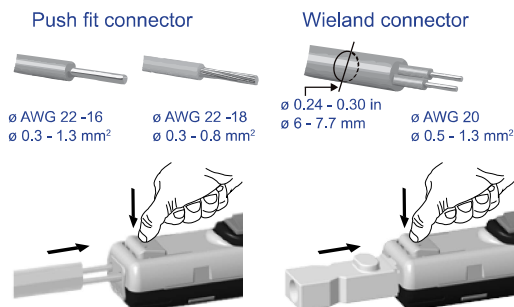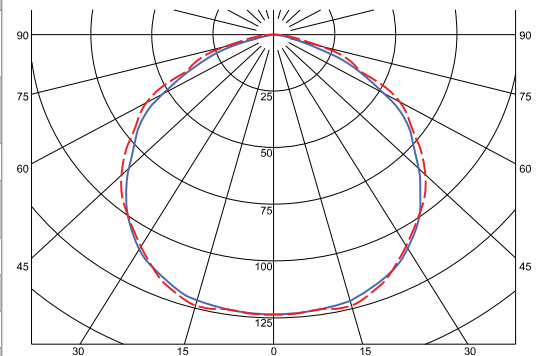

DAISY CHAIN INSTALLATION



Daisy chain cables available to connect multiple lights

© 03/2020 Seifert Systems / Doc no. 596005349_1.3

Seifert Systems GmbH

Albert - Einstein Str. 3
42477 Radevormwald

Germany

Tel. +49 (0) 2195 68994-0
Fax +49 (0) 2195 6899420

info.de@seifertsystems.com

Seifert Systems Ltd.

HF 09/10 Hal Far Industrial Estate
Birzebbuga, BBG 3000

Malta

Tel. +356 2220 7000
Fax +356 2165 2009

info@seifertsystems.com

Seifert Systems AG

Wilerstraße 16
CH- 4563 Gerlafingen

Switzerland

Tel. +41 (0) 32 675 35 51
Fax +41 (0) 32 675 44 76

info.ch@seifertsystems.com

Seifert Systems Inc.

75 Circuit Drive
North Kingstown
RI 02852
USA

Tel. +1 401-294-6960
Fax +1 401-294-6963

info.us@seifertsystems.com

Seifert Systems Australia Pty Ltd.

105 Lewis Road
Wantima South
3152 Victoria
Australia

Tel. +61 (3) 98 01 19 06
Fax +61 (3) 98 87 08 45

info@seifertsystems.com.au