



Control Cabinet Air Conditioner KG 4304-230V



Product Features

Brand Name:	SoliTherm ComPact
Order Number:	43040001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 54
Approvals:	CE, cURus, cULus
UL File Nummer:	cURus (SA32278), cULus (E498756)


Accessories:	Fibre filter media	
	Filter holder	
Taric Code:	84158200	

Technical data KG 4304-230V

Cooling capacity L35L35:	320 W @ 50 Hz 360 W @ 60 Hz
Cooling capacity L35L50:	200 W @ 50 Hz 220 W @ 60 Hz
Compressor:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	110 g / 3.9 oz
High / low pressure:	25 / 6 bar 365 / 88 psig
Temperature range:	+10°C - +55°C
Air volume flow (system / unimpeded):	Ambient air circuit: 90 / 250 m ³ /h Cabinet air circuit: 115 / 136 m ³ /h
Mounting:	External
Dimension H x W x D:	500 x 280 x 200 mm
Weight:	18 kg
Cut out dimensions:	480 x 240 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Current L35L35:	1.9 A @ 50 Hz 2.0 A @ 60 Hz
Starting current:	6.1 A
Max. current:	2.8 A
Nominal power L35L35:	335 W @ 50 Hz 380 W @ 60 Hz
Max. power:	550 W
Fuse:	6 A (T)
Connection:	Connection terminal block


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Cabinet cooling units - ComPact Line](#)

Performance Graph:

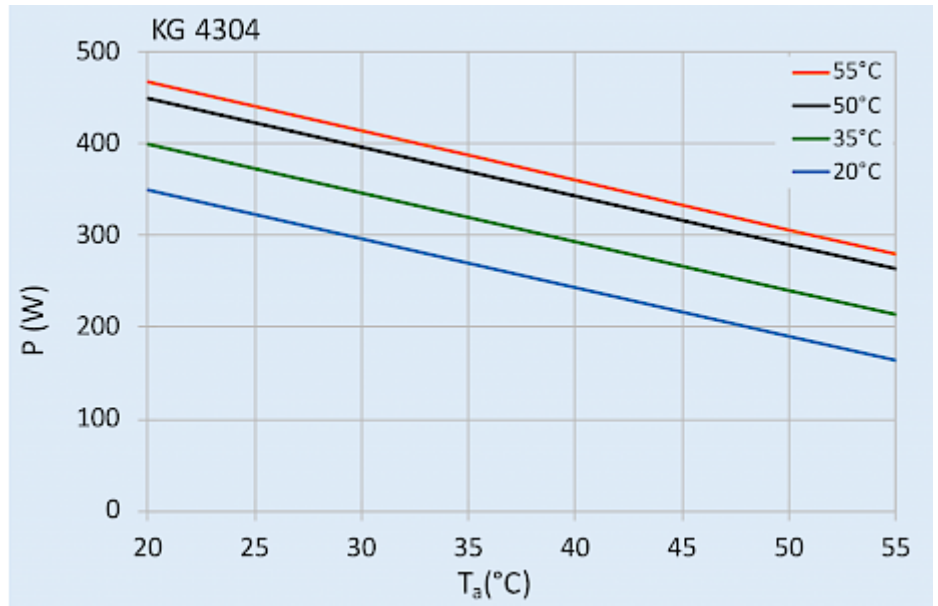


[click image to enlarge](#)

Air flow:

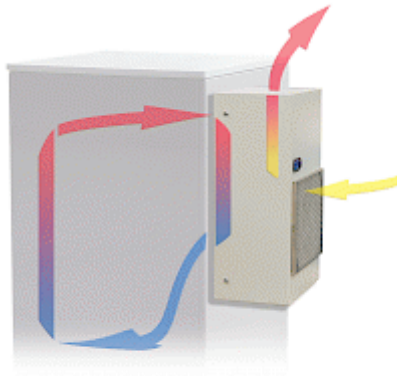

[click image to enlarge](#)

Cut out dimensions:

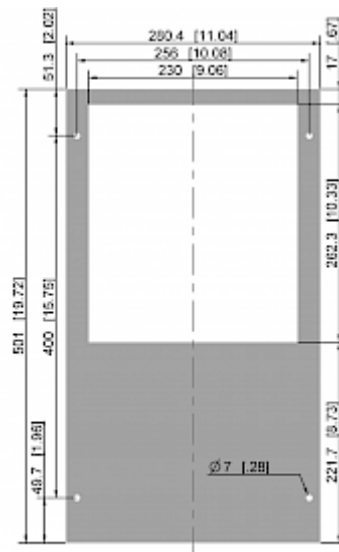

CUTOUT FOR EXTERNAL

[click image to enlarge](#)