

### product type designation

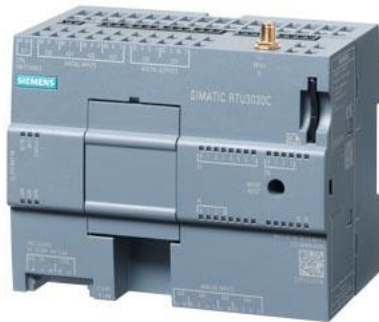


Figure similar

### RTU3030C

SIMATIC RTU3030C compact low-power RTU; battery or solar-operated; connection ext. power supply 10.8 V to 28.8 V DC; integrated UMTS modem; Connection to Telecontrol Server Basic, loadable protocols: DNP3, IEC 60870-5-104, SINAUT ST7 or MQTT, onboard I/Os: 8 DI, 4 DO, 4 AI; FTP client; Ethernet port, configuration / diagnostics via web server, time-of-day synchronization, SMS, email, SD card slot. Observe national approvals!

operating mode	Standby mode (Sleep mode), Actualization mode, Communication mode
<b>transfer rate</b>	
transfer rate	
<ul style="list-style-type: none"> <li>for Industrial Ethernet</li> </ul>	10 ... 100 Mbit/s
<ul style="list-style-type: none"> <li>for GPRS transmission                             <ul style="list-style-type: none"> <li>— with downlink / maximum</li> <li>— with uplink / maximum</li> </ul> </li> </ul>	85.6 kbit/s 107 kbit/s
<ul style="list-style-type: none"> <li>with UMTS transmission                             <ul style="list-style-type: none"> <li>— with downlink / maximum</li> <li>— with uplink / maximum</li> </ul> </li> </ul>	21 Mbit/s 5.76 Mbit/s
<b>interfaces</b>	
number of interfaces / according to Industrial Ethernet	1
number of electrical connections	
<ul style="list-style-type: none"> <li>at the 1st interface / according to Industrial Ethernet</li> <li>for external antenna(s)</li> <li>for power supply</li> </ul>	1 1 1
number of slots	
<ul style="list-style-type: none"> <li>for SIM cards</li> <li>for memory cards</li> </ul>	1 1
type of electrical connection	
<ul style="list-style-type: none"> <li>at the 1st interface / according to Industrial Ethernet</li> </ul>	RJ45 port
type of electrical connection	
<ul style="list-style-type: none"> <li>for external antenna(s)</li> <li>for power supply</li> </ul>	SMA socket (50 ohms) 5-pole plugable terminal block
type of antenna	
<ul style="list-style-type: none"> <li>at connection 1 / connectable</li> </ul>	mobile wireless antenna
slot version	
<ul style="list-style-type: none"> <li>for SIM card</li> <li>of the memory card</li> </ul>	Mini SIM card, with adapter Micro SIM card also SD 1.0, SD 1.1, SDHC, Siemens SMC
storage capacity / of the memory card / maximum	32 Gbyte
design of the removable storage	
<ul style="list-style-type: none"> <li>C-PLUG</li> </ul>	No
<b>signal inputs/outputs</b>	
number of electrical connections / for digital input signals	8
type of electrical connection / for digital input signals	pluggable screw terminal block
digital input version	Suitable for open-drain transistor or switch, 2-wire-technique
number of electrical connections / as counter inputs / for digital input signals	2

pulse duration / at counter input / minimum	0.1 ms
pulse frequency / at counter input / maximum	5000 Hz
number of electrical connections / for digital output signals	4
type of electrical connection / for digital output signals	pluggable screw terminal block
digital output version	bistable relay, 2-wire-technique
output current / at digital output	300 mA; Limiting continuous current
number of analog inputs / integrated	4
connector type / at the analog input	pluggable screw terminal block
type of analog input	2-/3-/4-wire-technique
product function / parameterizable analog inputs	Yes; Current 0/4..20mA, Voltage 0..5/10V, Temperature (Pt1000) -80..+140°C
A/D resolution / at the analog input	12 bit

#### wireless technology

type of mobile wireless service	
<ul style="list-style-type: none"> <li>• is supported / SMS</li> <li>• is supported / GPRS</li> <li>• note</li> </ul>	<p>Yes</p> <p>Yes</p> <p>GPRS (Multislot Class 10)</p>
type of wireless network / is supported	
<ul style="list-style-type: none"> <li>• GSM</li> <li>• UMTS</li> <li>• LTE</li> </ul>	<p>Yes</p> <p>Yes</p> <p>No</p>
operating frequency / for GSM transmission	850 MHz, 900 MHz, 1800 MHz, 1900 MHz
operating frequency / with UMTS transmission	900 MHz, 2100 MHz

#### supply voltage, current consumption, power loss

type of voltage / of the supply voltage	DC
supply voltage / external / at DC	12 ... 24 V
supply voltage / external / at DC / rated value	10.8 ... 28.8 V
type of output voltage / for the supply of external devices	DC 12 V or 24 V
consumed current / note	without connected consumers
consumed current	
<ul style="list-style-type: none"> <li>• from external supply voltage / at 24 V DC <ul style="list-style-type: none"> <li>— in standby mode / typical</li> <li>— in update mode / typical</li> <li>— in communication mode / typical</li> </ul> </li> <li>• with battery operation / at 7.2 V DC <ul style="list-style-type: none"> <li>— in standby mode / typical</li> <li>— in update mode / typical</li> <li>— in communication mode / typical</li> </ul> </li> </ul>	<p>14 mA</p> <p>35 mA</p> <p>83 mA</p> <p>0.28 mA</p> <p>71 mA</p> <p>208 mA</p>
power loss [W]	without connected consumers
power loss [W] / with external supply voltage / at 24 V DC	
<ul style="list-style-type: none"> <li>• in standby mode / typical</li> <li>• in update mode / typical</li> <li>• in communication mode / typical</li> </ul>	<p>0.34 W</p> <p>0.85 W</p> <p>2 W</p>
power loss [W] / with battery operation / at 7.2 V DC	
<ul style="list-style-type: none"> <li>• in standby mode / typical</li> <li>• in update mode / typical</li> <li>• in communication mode / typical</li> </ul>	<p>0.002 W</p> <p>0.51 W</p> <p>1.5 W</p>

#### ambient conditions

ambient temperature	
<ul style="list-style-type: none"> <li>• for vertical installation / during operation</li> <li>• for horizontally arranged busbars / during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	<p>-40 ... +60 °C</p> <p>-40 ... +70 °C</p> <p>-40 ... +70 °C</p> <p>-40 ... +70 °C</p>
relative humidity	
<ul style="list-style-type: none"> <li>• at 30 °C / without condensation / during operation / maximum</li> </ul>	95 %
protection class IP	IP20; IP68 with protective housing (see accessories)

#### design, dimensions and weights

module format	Compact module
width	130 mm
height	100 mm
depth	75 mm

net weight	0.37 kg
fastening method	
• 35 mm top hat DIN rail mounting	Yes
• wall mounting	Yes
<b>product features, product functions, product components / general</b>	
product function	
• DynDNS client	Yes
• no-ip.com client	Yes
<b>product functions / cloud connectivity</b>	
protocol / is supported	
• Message Queuing Telemetry Transport (MQTT)	Yes
product function / for cloud connectivity	
• trigger management	Yes
• time stamping	Yes
product feature / for cloud connectivity / buffered message frame memory	Yes
<b>performance data</b>	
number of users/telephone numbers/email addresses / definable / maximum	20
number of user groups / definable / maximum	10
number of program block types	43
number of configurable program blocks	48
number of digital bit memories / maximum	40
number of analog bit memories / maximum	24
<b>performance data / IT functions</b>	
number of possible connections	
• as client / by means of FTP / maximum	1
number of entries / in the FTP buffer / maximum	12
number of possible connections	
• as server / by means of HTTP / maximum	2
• as server / by means of HTTPS / maximum	2; http and https can be combined (max. number of 2 connections cannot be exceeded). Max. one connection via https is possible on the mobile wireless interface.
• as email client / maximum	1
number of free texts / for emails and SMS / maximum	20
number of characters / per free text for emails or SMS / maximum	160
number of entries / in the email buffer / maximum	12
<b>performance data / telecontrol</b>	
suitability for use	
• node station	No
• substation	Yes
• TIM control center	No
control center connection	IEC 60870-5-104, DNP3-capable control stations, SINAUT ST7 <sub>cc/sc</sub> , TeleControl Server Basic
• by means of a permanent connection	supported
• by means of demand-oriented connection	supported
protocol / is supported	
• DNP3	Yes
• IEC 60870-5	Yes
• SINAUT ST7 protocol	Yes
product function / data buffering if connection is aborted	Yes; number of telegrams for: IEC 60870: approx. 5,000, DNP3: approx. 10,900, SINAUT ST7: approx. 7,700, TeleControl Server Basic: approx. 10.900
data volume / as user data per station / in telecontrol mode / maximum	256 Kibyte
product feature / buffered message frame memory	Yes
<b>performance data / teleservice</b>	
diagnostics function / online diagnostics with SIMATIC STEP 7	No
product function	
• program download with SIMATIC STEP 7	No
• remote firmware update	Yes
• remote configuration	Yes
<b>product functions / management, configuration, engineering</b>	

configuration software	
<ul style="list-style-type: none"> <li>required</li> </ul>	No, configuration by using the integrated webserver
product function / gateway / for SIMATIC PDM	
<ul style="list-style-type: none"> <li>with Modbus TCP</li> </ul>	Yes
<ul style="list-style-type: none"> <li>with HART-IP protocol</li> </ul>	Yes
<b>product functions / diagnostics</b>	
product function / web-based diagnostics	Yes
<b>product functions / security</b>	
operating mode / Virtual Private Network (VPN)	Yes; OpenVPN client
product function / with VPN connection	OpenVPN
type of encryption algorithms / with VPN connection	AES-128, AES-256
type of authentication procedure / with VPN connection	certificate based
type of authentication / with Virtual Private Network / PSK	No
type of hashing algorithms / with VPN connection	SHA-256
number of possible connections / with VPN connection	2; one simultaneous productive connection only
product function	
<ul style="list-style-type: none"> <li>password protection for Web applications</li> </ul>	Yes
<ul style="list-style-type: none"> <li>password protection for teleservice access</li> </ul>	Yes
<ul style="list-style-type: none"> <li>password protection for VPN</li> </ul>	Yes
<ul style="list-style-type: none"> <li>encrypted data transmission</li> </ul>	Yes
<ul style="list-style-type: none"> <li>switch-off of non-required services</li> </ul>	Yes
<ul style="list-style-type: none"> <li>SysLog</li> </ul>	Yes
<b>product functions / time</b>	
protocol / is supported	
<ul style="list-style-type: none"> <li>NTP</li> </ul>	Yes
product component / hardware real time clock	Yes
product feature / hardware real time clock w. battery backup	Yes
accuracy / of the hardware real time clock / per day / maximum	1.8 s
time synchronization	
<ul style="list-style-type: none"> <li>from NTP-server</li> </ul>	Yes
<ul style="list-style-type: none"> <li>from control center</li> </ul>	Yes
<ul style="list-style-type: none"> <li>from mobile network provider</li> </ul>	Yes
<ul style="list-style-type: none"> <li>PC</li> </ul>	Yes
<ul style="list-style-type: none"> <li>manual setting</li> </ul>	Yes
<b>standards, specifications, approvals / hazardous environments</b>	
certificate of suitability / CCC / for hazardous zone according to GB standard	Yes
<ul style="list-style-type: none"> <li>as marking</li> </ul>	Ex nA IIC T4 Gc
<b>further information / internet links</b>	
internet link	
<ul style="list-style-type: none"> <li>to website: Industrial communication</li> </ul>	<a href="http://www.siemens.com/simatic-net">http://www.siemens.com/simatic-net</a>
<ul style="list-style-type: none"> <li>to website: Industry Mall</li> </ul>	<a href="https://mall.industry.siemens.com">https://mall.industry.siemens.com</a>
<ul style="list-style-type: none"> <li>to website: Information and Download Center</li> </ul>	<a href="http://www.siemens.com/industry/infocenter">http://www.siemens.com/industry/infocenter</a>
<ul style="list-style-type: none"> <li>to website: Image database</li> </ul>	<a href="http://automation.siemens.com/bilddb">http://automation.siemens.com/bilddb</a>
<ul style="list-style-type: none"> <li>to website: CAX-Download-Manager</li> </ul>	<a href="http://www.siemens.com/cax">http://www.siemens.com/cax</a>
<ul style="list-style-type: none"> <li>to website: Industry Online Support</li> </ul>	<a href="https://support.industry.siemens.com">https://support.industry.siemens.com</a>
<b>security information</b>	
security information	Siemens provides products and solutions with industrial security functions that support the secure operation of plants, solutions, machines, equipment and/or networks. They are important components in a holistic industrial security concept. With this in mind, Siemens' products and solutions undergo continuous development. Siemens recommends strongly that you regularly check for product updates. For the secure operation of Siemens products and solutions, it is necessary to take suitable preventive action (e.g. cell protection concept) and integrate each component into a holistic, state-of-the-art industrial security concept. Third-party products that may be in use should also be considered. For more information about industrial security, visit <a href="http://www.siemens.com/industrialsecurity">http://www.siemens.com/industrialsecurity</a> . To stay informed about product updates as they occur, sign up for a product-specific newsletter. For more information, visit <a href="http://support.automation.siemens.com">http://support.automation.siemens.com</a> . (V3.4)

last modified:

8/30/2023 