



Cabinet cooling unit KG 8506-230V



Product Features


Brand Name:	SlimLine Pro	
Order Number:	850600001	
Color:	RAL 7035	
Housing Material:	Mild steel, powder coated	
Ingress protection:	IP 56 / Type 12, 3, 3R, 4	
Note:	pat. D815,265	
Approvals:	CE, RoHS	
Accessories:	Aluminum filter	
	Cold air outlet duct	
Taric Code:	84158200	

Technical data KG 8506-230V

Cooling capacity L35L35:	670 W @ 50 Hz 680 W @ 60 Hz
Cooling capacity L35L50:	435 W @ 50 Hz 450 W @ 60 Hz
Compressor:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	108 g / 3.8 oz.
High / low pressure:	26 / 6 bar 425 / 88 psi
Temperature range:	+10°C - +60°C
Air volume flow (system / unimpeded):	Ambient air circuit: 200 / 408 m ³ /h Cabinet air circuit: 122 / 180 m ³ /h
Mounting:	External / recessed
Dimension H x W x D:	600 x 250 x 135 mm
Weight:	14 kg
Voltage / Frequency:	230 V ~ 50/60 Hz
Current L35L35:	2.1 A
Starting current:	6 A
Max. current:	2.6 A
Nominal power L35L35:	430 W @ 50 Hz 450 W @ 60 Hz
Max. power:	600 W
Fuse:	4.5 A (T)
Connection:	5 pole terminal for signals 4 pole terminal for power


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Cabinet cooling units - SlimLine Pro](#)

Performance Graph:

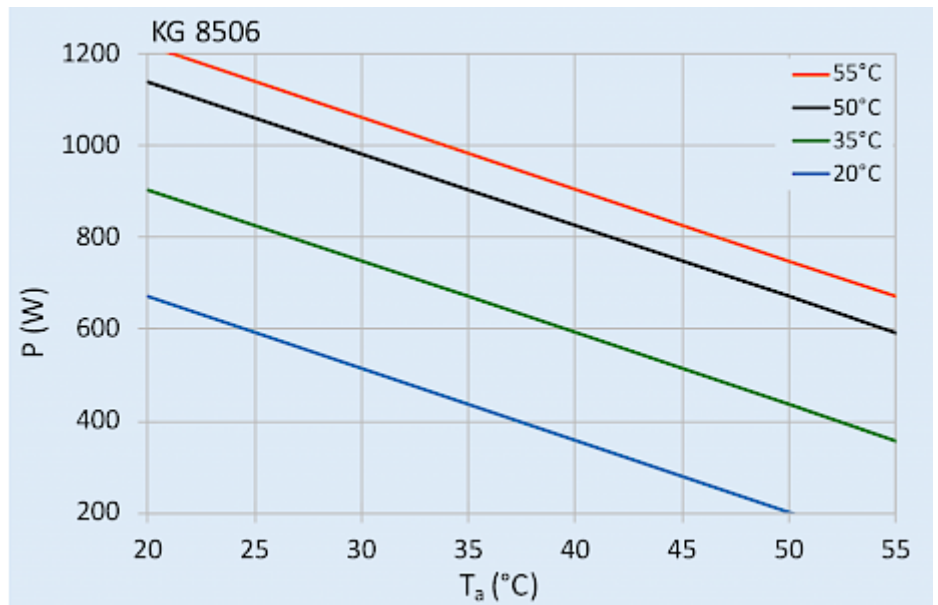


[click image to enlarge](#)

Cut out dimensions:

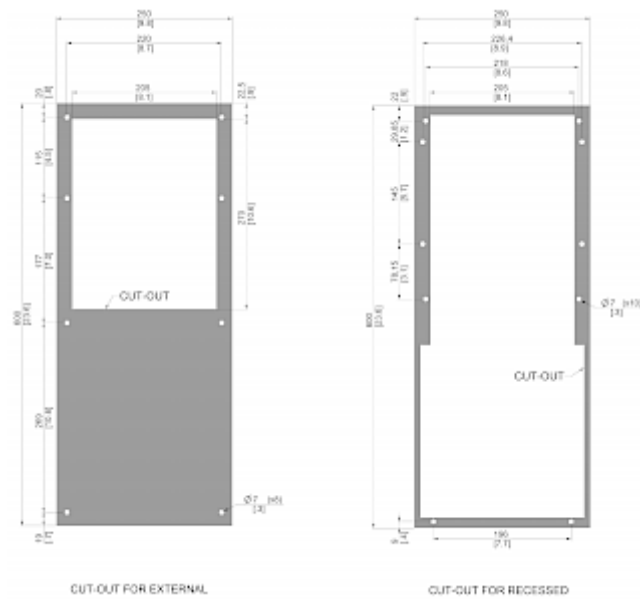

[click image to enlarge](#)

Product Accessories:

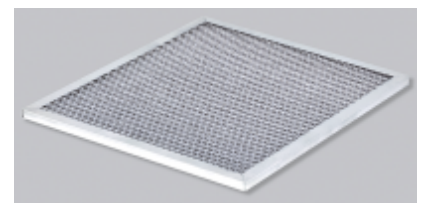

[click image to enlarge](#)