SIEMENS

Data sheet 8WD5320-5AE



Integrated signal lamp, continuous light, with integrated LED, clear, 24 V AC/DC, Diameter 70 mm

product designation Continuous light element consumed current maximum 45 mA type of voltage of the operating voltage • 1 at DC rated value • 1 at AC at 50 Hz rated value • 1 at AC at 60 Hz rated value 24 V relative positive tolerance of the operating voltage relative negative tolerance of the operating voltage reference code according to IEC 81346-2 fastening method material PC; PC/ABS; PA color Color	
type of voltage of the operating voltage operating voltage 1 at DC rated value 1 at AC at 50 Hz rated value 1 at AC at 60 Hz rated value 24 V relative positive tolerance of the operating voltage relative negative tolerance of the operating voltage reference code according to IEC 81346-2 fastening method Bayonet / flush mounting material PC; PC/ABS; PA color clear	
operating voltage • 1 at DC rated value • 1 at AC at 50 Hz rated value • 1 at AC at 60 Hz rated value 24 V relative positive tolerance of the operating voltage relative negative tolerance of the operating voltage reference code according to IEC 81346-2 fastening method material PC; PC/ABS; PA color clear	
1 at DC rated value 1 at AC at 50 Hz rated value 1 at AC at 60 Hz rated value 1 at AC at 60 Hz rated value 24 V relative positive tolerance of the operating voltage relative negative tolerance of the operating voltage reference code according to IEC 81346-2 fastening method Bayonet / flush mounting material PC; PC/ABS; PA color clear	
1 at AC at 50 Hz rated value 1 at AC at 60 Hz rated value 24 V relative positive tolerance of the operating voltage relative negative tolerance of the operating voltage reference code according to IEC 81346-2 fastening method Bayonet / flush mounting material PC; PC/ABS; PA color clear	
● 1 at AC at 60 Hz rated value relative positive tolerance of the operating voltage relative negative tolerance of the operating voltage reference code according to IEC 81346-2 p fastening method Bayonet / flush mounting material PC; PC/ABS; PA color clear	
relative positive tolerance of the operating voltage relative negative tolerance of the operating voltage -10 % reference code according to IEC 81346-2 p fastening method Bayonet / flush mounting material PC; PC/ABS; PA color clear	
relative negative tolerance of the operating voltage reference code according to IEC 81346-2 fastening method Bayonet / flush mounting material PC; PC/ABS; PA color clear	
reference code according to IEC 81346-2 fastening method material PC; PC/ABS; PA color clear	
fastening method Bayonet / flush mounting material PC; PC/ABS; PA color clear	
material PC; PC/ABS; PA color clear	
color clear	
Mechanical data	
product component light source Yes	
type of electrical connection screw-type terminals	
outer diameter of the signal column element 75 mm	
Lamp	
design of the optical signal continuous light	
type of light source LED	
light intensity 3.14 cd	
light intensity 1.73 4.27 cd	
service life of LED 100 000 h	
Ambient conditions	
ambient temperature during operation -20 +50 °C	
protection class IP IP65	
depth 31 mm	
height 66 mm	
width 75 mm	
Certificates/ approvals	
General Product Approval EMC Declaration of Conformity	

Confirmation











other

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD5320-5AE

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD5320-5AE


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/8WD5320-5AE

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD5320-5AE&lang=en

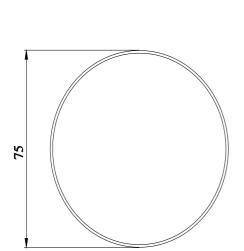

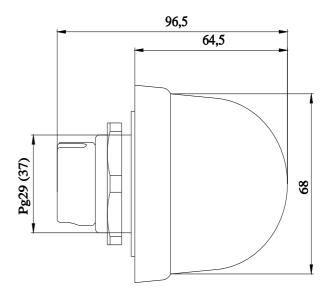

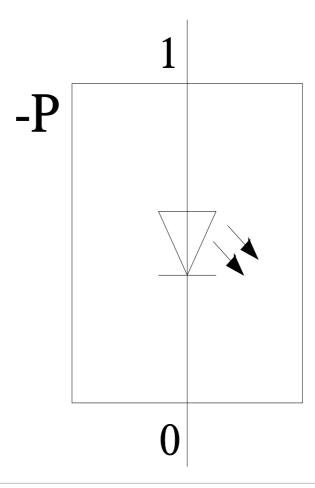

last modified: 8/29/2023 🖸