

Socket model ES 50

Relay socket Model ES 50, for miniature power relay or miniature switching relay or solid-state relay with 1 or 2 PDT and 5 mm pinning, 2/2 level design, screw connections, connection facility for input interference suppression modules.

Rated current / Rated voltage	12 A / 300 V (CSA)
	10 A / 300 V (UL)

Dielectric strength adjacent contact circuits	2500V
Dielectric strength coil contact circuits	2500V

Connection data

Conductor cross section solid and stranded	min. 0,5 mm ²
Conductor cross section solid and stranded	max. 2,5 mm ²
Conductor cross section AWG	min. 20
Conductor cross section AWG	max 14
Stripping length	7 mm
Screw thread	M3



General data

Width	15,6 mm
Height	75,5 mm
Color	Black
Ambient temperature (operation)	-25 °C ... 85 °C



ES50CNER
Pack. 240 pcs

Connection diagrams
see pages 370-371

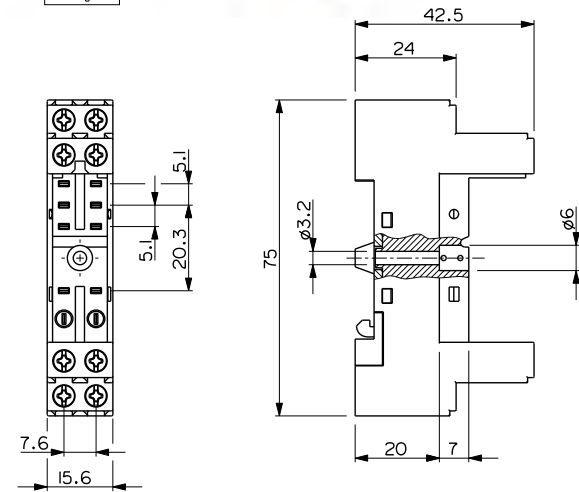

Socket model ES 50/3

Relay socket Model ES 50/3, for miniature power relay or miniature switching relay or solid-state relay with 2 PDT and 5 mm pinning, safety isolation among coil contacts and power contacts, 1/3 level design, screw connections, connection facility for input interference suppression modules.

Rated voltage	300 VAC
Rated current	12 A
Dielectric strength adjacent contact circuits	2500V
Dielectric strength coil contact circuits	2500V

Connection data

Conductor cross section solid and stranded	min. 0,5 mm ²
Conductor cross section solid and stranded	max. 2,5 mm ²
Conductor cross section AWG	min. 20
Conductor cross section AWG	max 14
Stripping length	7 mm
Screw thread	M3


General data

Width	15,6 mm
Height	75,6 mm
Color	Black
Ambient temperature (operation)	-25 °C ... 85 °C



ES503CNER
Pack. 240 pcs

Connection diagrams
see pages 370-371

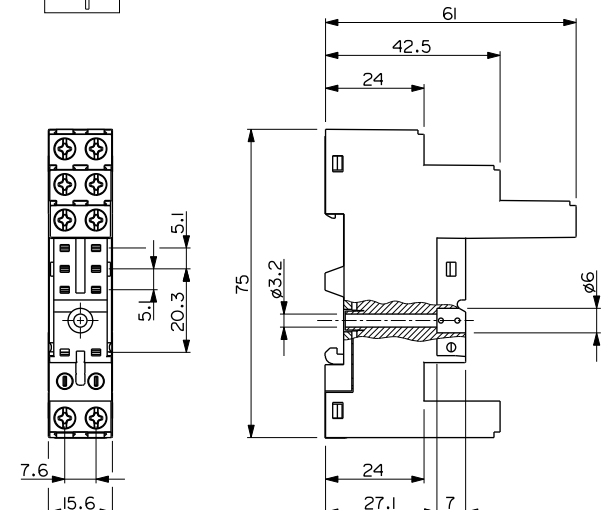

Standard article
 Article on request
 MOQ: minimum quantity order