


# LED INTEGRATED LAMP-HOLDER, Ø22MM 8LM SERIES METAL, STEADY LIGHT, 12...30VAC/DC. GREEN




Product designation				LED elements steady light
Product type designati	on			8LM2TL
General characteristics	3			
Colour				Green
Electrical characteristic	os			
Rated frequency			Hz	50/60
Supply voltage (AC)			V	1230
Supply voltage (DC)			V	1230
Operations				
Electrical life			hours	100000
Mechanical features				
Tightening torque for terminals max			Nm	1
Conductor section				
	AWG/kcmil conductor section			
		max		12
	IEC			
		max	mm²	1 or 2 2.5
Mounting adapter				LM2TAU120
Weight			g	16
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+60
	Storage temperature			
		min	°C	-40
		max	°C	+85
Dimensions				


**ENERGY AND AUTOMATION** 

## LED INTEGRATED LAMP-HOLDER, Ø22MM 8LM SERIES METAL, STEADY LIGHT, 12...30VAC/DC. GREEN

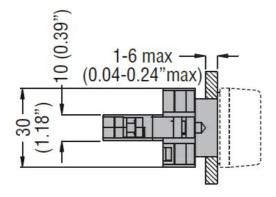

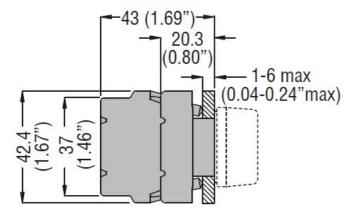

### Wiring diagrams



### Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

**UL508** 

Certificates

CCC

cULus

EAC

### ETIM classification

ETIM 8.0

EC000204 -Lamp holder block for control circuit devices