




Product designation				LED elements steady light
Product type designation				8LM2TL
<b>General characteristics</b>				
Colour				Red
<b>Electrical characteristics</b>				
Rated frequency		Hz	50/60	
Supply voltage (AC)		V	12...30	
Supply voltage (DC)		V	12...30	
<b>Operations</b>				
Electrical life		hours	100000	
<b>Mechanical features</b>				
Tightening torque for terminals max		Nm	1	
Conductor section	AWG/kcmil conductor section		max	12
	IEC		max	mm <sup>2</sup> 1 or 2 2.5
Mounting adapter				LM2TAU120
Weight				g 16
<b>Ambient conditions</b>				
Temperature	Operating temperature		min	°C -25
			max	°C +60
	Storage temperature		min	°C -40
			max	°C +85
<b>Dimensions</b>				



### Wiring diagrams

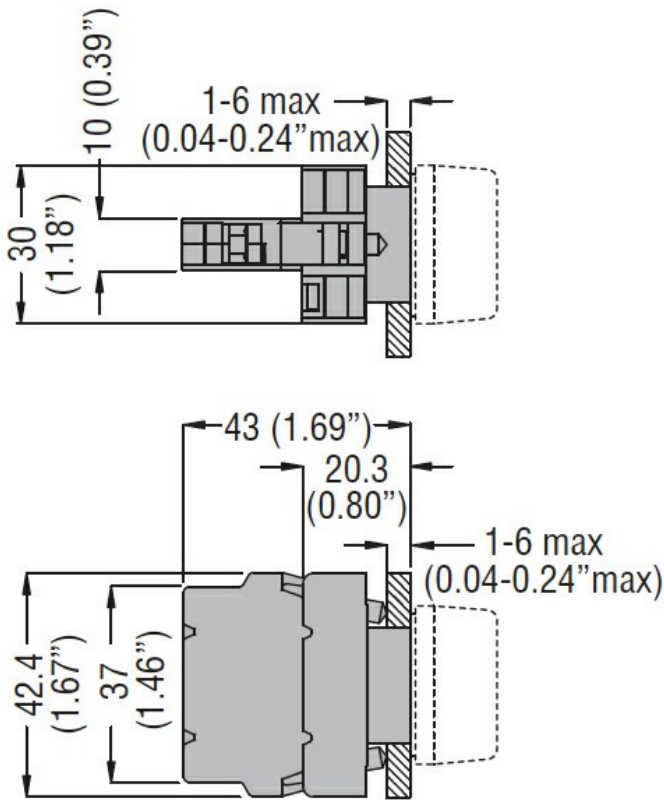

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14  
IEC/EN 60947-1  
IEC/EN 60947-5-1  
UL508

#### Certificates

CCC  
cULus  
EAC

### ETIM classification

ETIM 8.0

EC000204 -  
Lamp holder  
block for control  
circuit devices