




Product designation				LED elements
Product type designation				steady light
				8LM2TL
<b>General characteristics</b>				
Colour				Yellow
<b>Electrical characteristics</b>				
Rated frequency		Hz	50/60	
Supply voltage (AC)		V	12...30	
Supply voltage (DC)		V	12...30	
<b>Operations</b>				
Electrical life		hours	100000	
<b>Mechanical features</b>				
Tightening torque for terminals max		Nm	1	
Conductor section	AWG/kcmil conductor section			
		max	12	
	IEC			
		max	mm <sup>2</sup>	1 or 2 2.5
Mounting adapter				LM2TAU120
Weight		g	16	
<b>Ambient conditions</b>				
Temperature	Operating temperature			
		min	°C	-25
		max	°C	+60
	Storage temperature			
		min	°C	-40
		max	°C	+85
<b>Dimensions</b>				



### Wiring diagrams

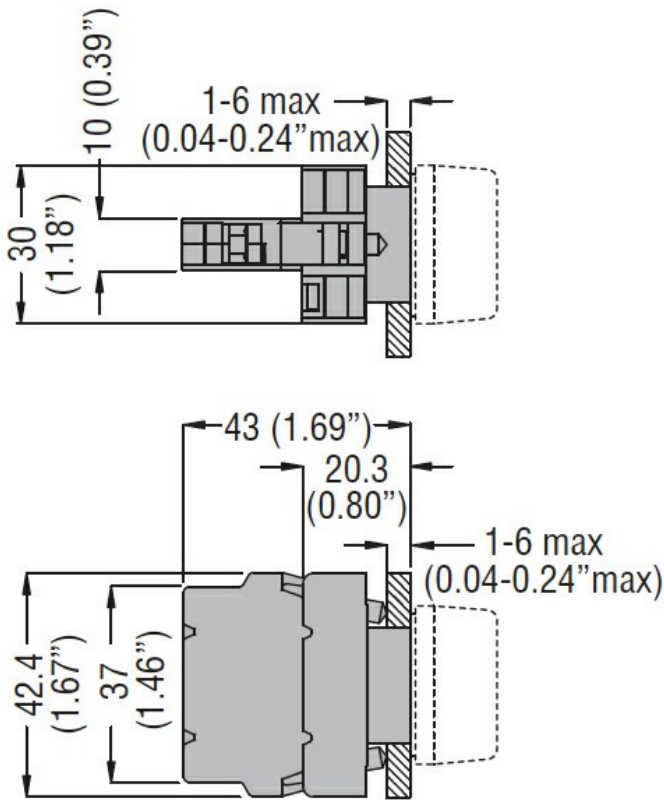

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

#### Certificates

CCC

cULus

EAC

### ETIM classification

ETIM 8.0

EC000204 -  
Lamp holder  
block for control  
circuit devices