





Product designation				LED elements steady light
Product type designation				8LM2TL
General characteristics				
Colour				Blue
Electrical characteristics				
Rated frequency	Hz			50/60
Supply voltage (AC)	V			12...30
Supply voltage (DC)	V			12...30
Operations				
Electrical life	hours			100000
Mechanical features				
Tightening torque for terminals max	Nm			1
Conductor section	AWG/kcmil conductor section			
		max	12	
	IEC			
		max	mm ²	1 or 2 2.5
Mounting adapter				LM2TAU120
Weight				g 16
Ambient conditions				
Temperature	Operating temperature			
	min	°C	-25	
	max	°C	+60	
	Storage temperature			
	min	°C	-40	
	max	°C	+85	
Dimensions				

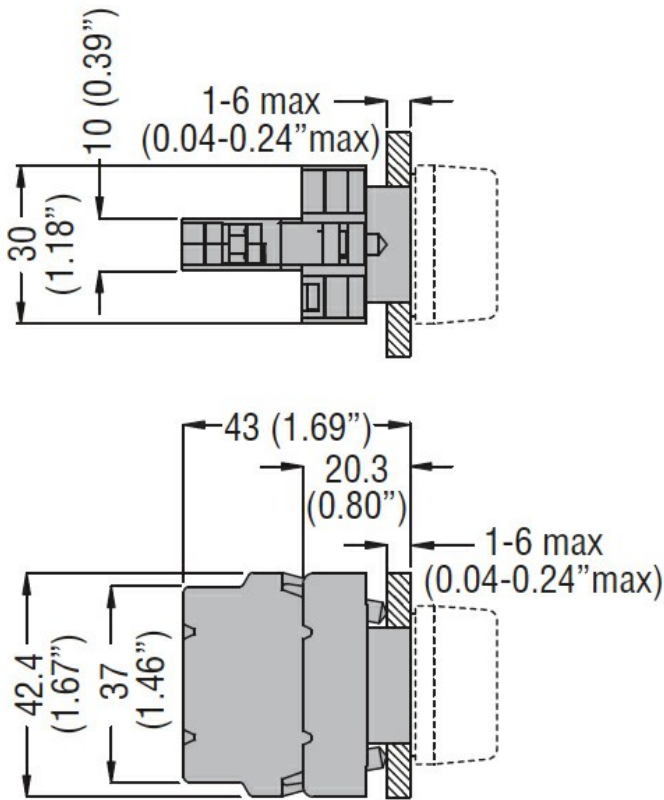

Wiring diagrams

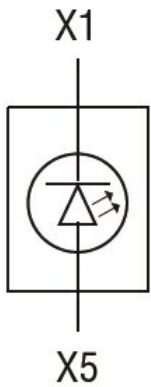

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000204 -
Lamp holder
block for control
circuit devices