




Product designation				LED elements
Product type designation				steady light
				8LM2TL
General characteristics				
Colour				White
Electrical characteristics				
Rated frequency		Hz	50/60	
Supply voltage (AC)		V	12...30	
Supply voltage (DC)		V	12...30	
Operations				
Electrical life		hours	100000	
Mechanical features				
Tightening torque for terminals max		Nm	1	
Conductor section	AWG/kcmil conductor section			
		max	12	
	IEC			
		max	mm ²	1 or 2 2.5
Mounting adapter				LM2TAU120
Weight		g	16	
Ambient conditions				
Temperature	Operating temperature			
		min	°C	-25
		max	°C	+60
	Storage temperature			
		min	°C	-40
		max	°C	+85
Dimensions				



Wiring diagrams

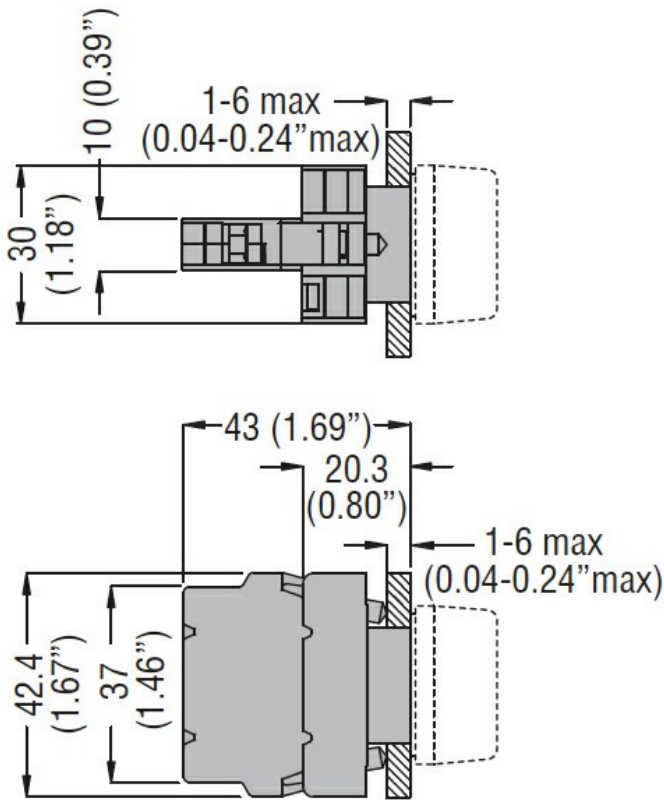

Certifications and compliance

Compliance

CSA C22.2 n° 14
 IEC/EN 60947-1
 IEC/EN 60947-5-1
 UL508

Certificates

CCC
 cULus
 EAC

ETIM classification

ETIM 8.0

EC000204 -
 Lamp holder
 block for control
 circuit devices