




|                                     |                             |                 |            |
|-------------------------------------|-----------------------------|-----------------|------------|
| Product designation                 | LED elements steady light   |                 |            |
| Product type designation            | 8LM2TL                      |                 |            |
| <b>General characteristics</b>      |                             |                 |            |
| Colour                              | Green                       |                 |            |
| <b>Electrical characteristics</b>   |                             |                 |            |
| Rated frequency                     | Hz                          | 50/60           |            |
| Supply voltage (AC)                 | V                           | 185...265       |            |
| <b>Operations</b>                   |                             |                 |            |
| Electrical life                     | hours                       | 100000          |            |
| <b>Mechanical features</b>          |                             |                 |            |
| Tightening torque for terminals max | Nm                          | 1               |            |
| Conductor section                   | AWG/kcmil conductor section |                 |            |
|                                     | max                         | 12              |            |
|                                     | IEC                         |                 |            |
|                                     | max                         | mm <sup>2</sup> | 1 or 2 2.5 |
| Mounting adapter                    | LM2TAU120                   |                 |            |
| Weight                              | g                           | 16              |            |
| <b>Ambient conditions</b>           |                             |                 |            |
| Temperature                         | Operating temperature       |                 |            |
|                                     | min                         | °C              | -25        |
|                                     | max                         | °C              | +60        |
|                                     | Storage temperature         |                 |            |
|                                     | min                         | °C              | -40        |
|                                     | max                         | °C              | +85        |
| <b>Dimensions</b>                   |                             |                 |            |



### Wiring diagrams

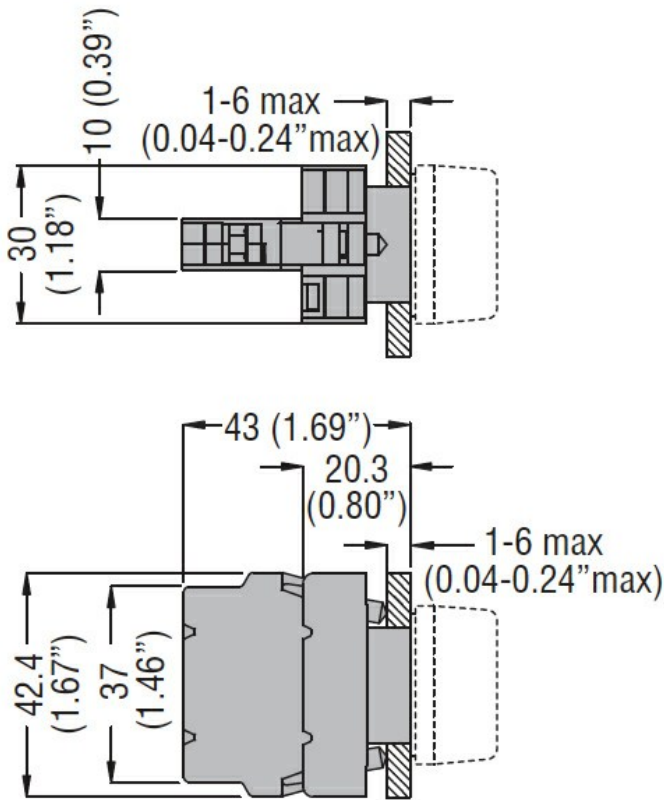

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

#### Certificates

CCC

cULus

EAC

### ETIM classification

ETIM 8.0

EC000204 -  
Lamp holder  
block for control  
circuit devices