


LED INTEGRATED LAMP-HOLDER, Ø22MM 8LM SERIES METAL, STEADY LIGHT, 187...265VAC. WHITE




Product designation				LED elements steady light
Product type designat	ion			8LM2TL
General characteristic	S			
Colour				White
Electrical characteristi	cs			
Rated frequency			Hz	50/60
Supply voltage (AC)			V	185265
Operations				
Electrical life			hours	100000
Mechanical features				
Tightening torque for terminals max			Nm	1
Conductor section				
	AWG/kcmil conductor section			
		max		12
	IEC			
		max	mm²	1 or 2 2.5
Mounting adapter				LM2TAU120
Weight			g	16
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+60
	Storage temperature			
		min	°C	-40
		max	°C	+85
		Παλ	U	+03

ENERGY AND AUTOMATION

LED INTEGRATED LAMP-HOLDER, Ø22MM 8LM SERIES METAL, STEADY LIGHT, 187...265VAC. WHITE

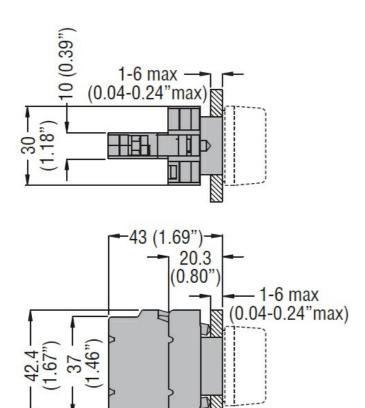

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000204 -Lamp holder block for control circuit devices