



Push-push button actuators - Extended  
8LM2TQ203

Product designation

Product type designation

**General characteristics**

|                          |                          |
|--------------------------|--------------------------|
| Colour                   | Green                    |
| Material                 | Aluminium and zinc alloy |
| IEC degree of protection | IP65                     |

**Mechanical features**

|                                           |        |             |
|-------------------------------------------|--------|-------------|
| Operating force                           | kg-lb  | 0.8kg/1.7lb |
| Mechanical life - spring return actuators | cycles | 1000000     |
| Mechanical life - Push-Push actuators     | cycles | 500000      |
| Mounting adapter                          |        | LM2TAU120   |
| Weight                                    | g      | 35          |

**UL technical data**

|                         |                      |
|-------------------------|----------------------|
| UL degree of protection | 1, 2, 3R, 4, 4X, 12K |
|-------------------------|----------------------|

**Ambient conditions**

Temperature


Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +60 |

Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +70 |

**Dimensions**

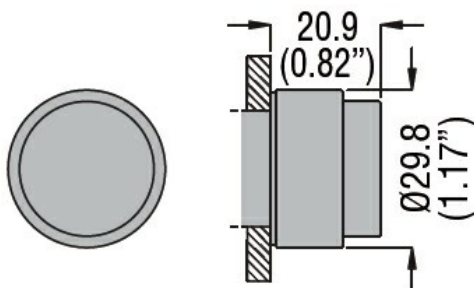

**Certifications and compliance**

Compliance

CSA C22.2 n° 14  
IEC/EN 60947-1  
IEC/EN 60947-5-1  
UL508

Certificates

CCC  
cULus

---

EAC

---

LROS

---

RINA

ETIM classification

ETIM 8.0

EC000221 -  
Front element for  
push button