



| | |
|--------------------------|--|
| Product designation | Selector switch actuators short lever - 2 position |
| Product type designation | 8LM2TS1 |

General characteristics

| | |
|--------------------------|--------------------------|
| Type of positions | Spring return |
| Material | Aluminium and zinc alloy |
| IEC degree of protection | IP65 |

Mechanical features

| | | |
|------------------|--------|-----------|
| Mechanical life | cycles | 300000 |
| Mounting adapter | | LM2TAU120 |
| Weight | g | 49 |


UL technical data

| | |
|-------------------------|-------------------------------|
| UL degree of protection | Type 1, 2, 3R, 4, 4X, 12, 12K |
|-------------------------|-------------------------------|

Ambient conditions

| | | | | |
|-------------|-----------------------|-----|----|-----|
| Temperature | | | | |
| | Operating temperature | | | |
| | | min | °C | -25 |
| | | max | °C | +60 |
| | Storage temperature | | | |
| | | min | °C | -40 |
| | | max | °C | +70 |

Dimensions

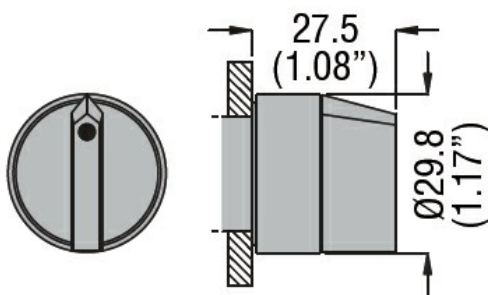

Certifications and compliance

| | |
|------------|------------------|
| Compliance | CSA C22.2 n° 14 |
| | IEC/EN 60947-1 |
| | IEC/EN 60947-5-1 |
| | UL508 |

| | |
|--------------|-------|
| Certificates | CCC |
| | cULus |
| | EAC |
| | LROS |

RINA

ETIM classification

ETIM 8.0

EC000222 -
Front element for
selector switch