



Monoblock buzzer  
- Continuous or pulse tone  
LPCZS

Product designation

Product type designation

**General characteristics**

Material

Polyamide

IEC degree of protection

IP66, IP67;  
IP96K on front  
and IP20 on rear

**Electrical characteristics**

Rated impulse withstand voltage Uimp

kV 4

Rated frequency

Hz 50-60

Supply voltage (AC)

V 9...15

Supply voltage (DC)

V 9...15

**Mechanical features**

Tightening torque for terminals max

Nm 0.5

Screwdriver

Flat-head:  
0.6x3.5mm/0.02x0.

Conductor section

AWG/kcmil conductor section

min 24  
max 14

IEC

min mm<sup>2</sup> 0.5  
max mm<sup>2</sup> 2.5

Weight

g 20

**UL technical data**

UL degree of protection

1, 2, 3R, 4, 4X,  
12, 12K on front

**Ambient conditions**

Temperature


Operating temperature

min °C -25  
max °C +70


Storage temperature

min °C -40  
max °C +85

**Dimensions**

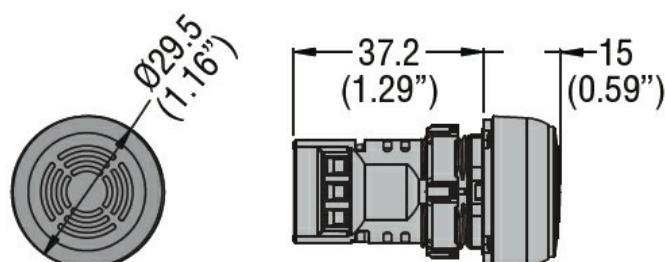

**Wiring diagrams**

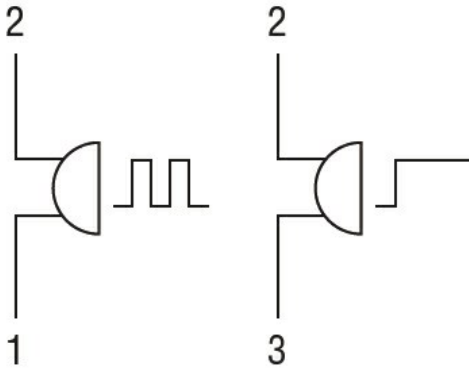

**Certifications and compliance**

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

CCC

cULus

EAC

**ETIM classification**

ETIM 8.0

EC000130 -  
Signal horn