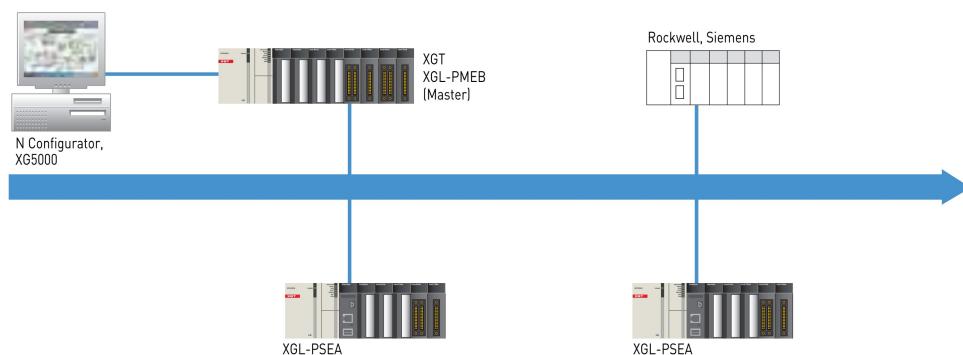


Features

- Profibus-DP
- Max. 98 stations available
- Other product Master <-> Pnet Slave I/F Module connect
- I/O configuration through XG5000 high-speed link parameter
- Provides online network status monitoring
- Global Command
 - Sync, Unsync, Freeze, Unfreeze

**System configuration with other products****Specifications**

Item		XGL-PSEA				
Standard		EN50170 / DIN 19245				
Interface		RS-485(Electric)				
Media access		Polling				
Topology		Bus				
Modulation		NRZ				
Network Interface		Auto baud rate				
Master / Slave		Slave				
Max. number of slave per network		99				
Max. number of slave per segment		32				
Cable		Shield twisted pair cable				
Max. I/O data		244 byte				
Configuration tool		XG5000				
Transmission distance and speed	Trans. speed(kbps)	9.6	19.2	93.75	187.5	500
	Max. network length(m)	1200	1200	1200	1000	400
	Trans. speed(kbps)	1500	3000	6000	12000	-
	Max. network length(m)	200	100	100	100	-
Max num. of node		99[0~98]				
Max num. of transmission block		24				
Max num. of installation		12ea (XGR: Max. 6ea)				
Installation	XGK-CPUU/H, XGI-CPUU					Main base ~ 7 th Expansion base
	XGK-CPUE, XGI-CPUE					Main base ~ 1 st Expansion base
	XGK-CPUA/S, XGI-CPUH/S					Main base ~ 3 rd Expansion base
	XGR-CPUH/F, XGR-CPUH/T					Main base
Current consumption (mA)		410				
Weight (g)		103				