


The PT5AV is a combination position and velocity transducer. A precision plastic-hybrid potentiometer provides accurate position feedback while a self-generating DC tachometer provides a velocity signal that is proportional to the speed of the traveling measuring cable.

Like Celesco's other transducers, the PT5AV installs in minutes, functions properly without perfectly parallel alignment, and fits easily into small areas. The PT5AV also has an optional unique thermoplastic measuring cable that has virtually an infinite fatigue life for high-cycle applications.

#### Output Signal

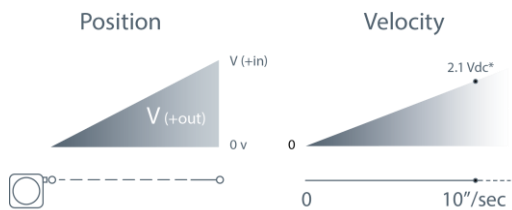

\*velocity output rate = 354 mV ± 4% @ 100 inches per min.

## PT5AV

### Cable Actuated Sensor Industrial Grade • Position/Velocity Output

Linear Position/Velocity to 250 inches (6350 mm)

Hard Anodized Aluminum Enclosure

High Cycle Applications

IP67 • NEMA 6 Protection

#### General

Full Stroke Range Options 0-10 to 0-250 inches

#### Position

Full Stroke Range Options 0-10 to 0-250 inches

Output Signal voltage divider (potentiometer)

Accuracy ±0.18% to ±0.75% full stroke (see ordering information)

Repeatability ±0.02% to ±0.1% full stroke (see ordering information)

Resolution essentially infinite

Sensor plastic-hybrid precision potentiometer

Potentiometer Cycle Life see ordering information

Input Resistance Options 500, 1K, 5K or 10K Ω

Power Rating, Watts see ordering information

Recommended Maximum Input Voltage see ordering information

Output Signal Change Over Full Stroke Range 94% ±4% of input voltage

#### Velocity

Output Signal DC voltage

Linearity better than ±0.10% of output at any velocity

Repeatability ±0.10% of reading

Maximum Velocity • Retraction see ordering information

Acceleration

Sensor tach generator

Output Voltage @ 100 in. per minute (varies slightly w/measuring cable)

N34 cable option 354 mV ±4%

S47 cable option 352 mV ±4%

V62 cable option 351 mV ±4%

Output Impedance 350 ohms ±10%

Output Ripple (for velocity ≥ 1.35 inches per second) ±3% rms

#### Environmental

Enclosure NEMA 4/6, IP 65/67

Operating Temperature -40° to 200°F (-40° to 90°C)

Vibration up to 10 g to 2000 Hz maximum

#### General

Measuring Cable stainless steel or thermoplastic



Enclosure hard anodized aluminum

Weight 5 lbs. max.

# PT5AV


Industrial Grade • Position/Velocity Output

## Outline Drawing

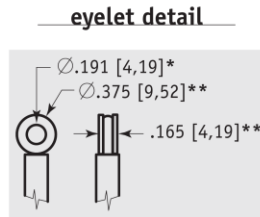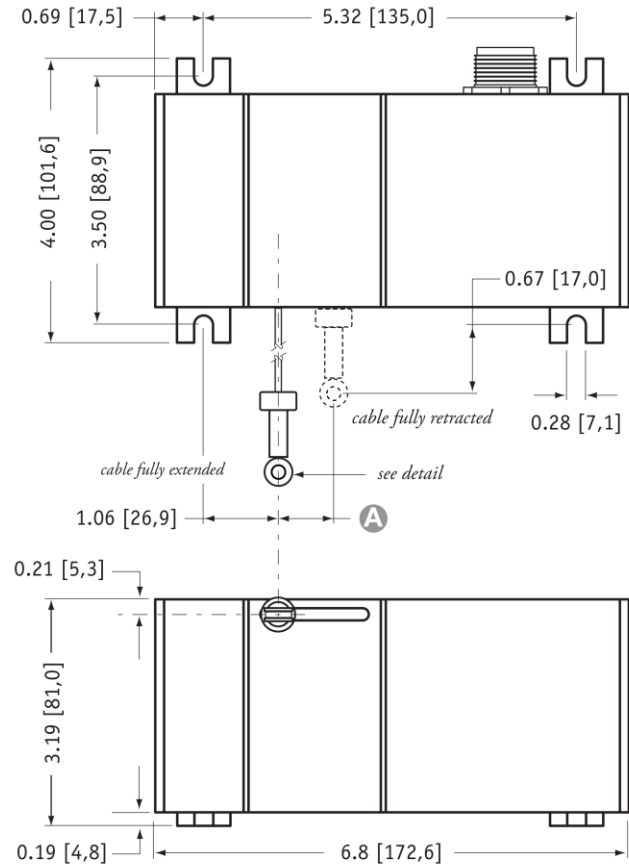

### A DIMENSION (inches[mm])

RANGE	N34	S47 & V62
	measuring cable	measuring cable
10	0.05 [1,2]	0.08 [2,0]
15	0.07 [1,8]	0.12 [3,0]
20	0.09 [2,4]	0.16 [3,9]
30	0.14 [3,5]	0.23 [5,9]
40	0.19 [4,7]	0.31 [7,9]
50	0.23 [5,9]	0.39 [9,9]
60	0.28 [7,0]	0.47 [11,8]
80	0.37 [9,4]	0.62 [15,8]
100	0.46 [11,7]	0.78 [19,7]
125	0.58 [14,7]	0.97 [24,7]
150	0.69 [17,6]	1.16 [29,6]
200	0.92 [23,5]	n/a
250	1.16 [29,3]	n/a

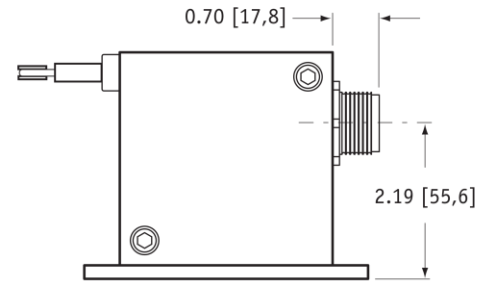

DIMENSIONS ARE IN INCHES [MM]  
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 - .001 [+ .13 - .03]  
\*\* tolerance = +.005 - .005 [+ .13 - .13]

## Ordering Information

### Model Number:

**PT5AV** - \_\_\_\_\_

order code:      R      A      B      C      D

Sample Model Number:

**PT5AV - 100 - N34 - FR - 500 - M6**


- R range: 100 inches
- A measuring cable: .034 nylon-coated stainless
- B cable exit: front
- C output signal: 500 ohm potentiometer
- D electrical connection: 6-pin plastic connector

### Full Stroke Range:

R order code:	10	15	20	25	30	40	50	60	80	100	125	150	200	250
full stroke range, min:	10 in.	15 in.	20 in.	25 in.	30 in.	40 in.	50 in.	60 in.	80 in.	100 in.	125 in.	150 in.	200 in.	250 in.
accuracy (±% of f.s.):	.75%	.6%	.5%	.5%	.5%	.3%	.3%	.25%	.25%	.25%	.25%	.18%	.18%	.18%
repeatability (±% of f.s.):	.1%	.1%	.05%	.05%	.05%	.05%	.05%	.02%	.02%	.02%	.02%	.02%	.02%	.02%
potentiometer cycle life:	2,500,000 cycles						500,000 cycles			250,000 cycles				
cable tension (20%):	41 ounces												21 ounces	
max. cable velocity/acceleration:	300 in./sec • 5 g												120 in./sec • 2 g	


**Measuring Cable:**

**A** order code:

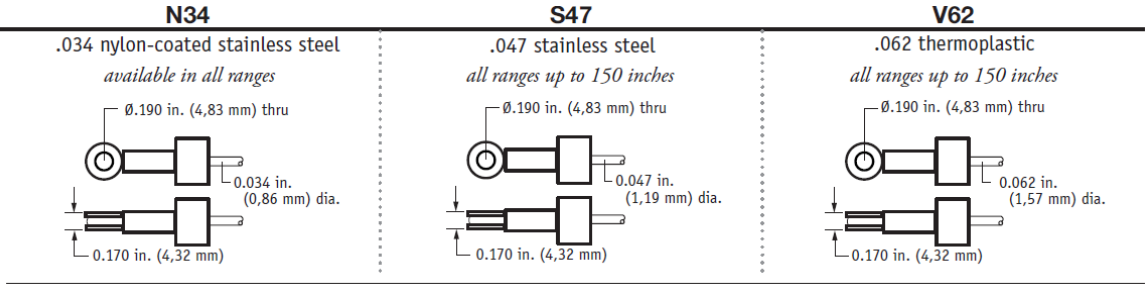


**Cable Exit:**

**B** order code:

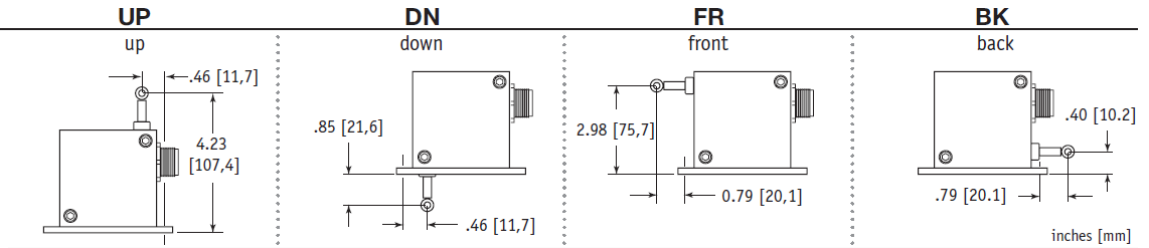

**Output Signals:**


**C** order code:

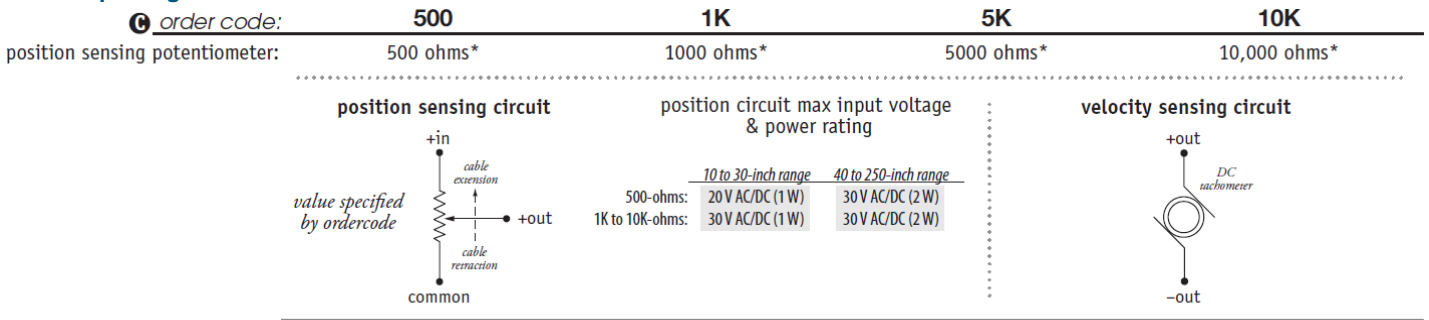

\*-tolerance = ±10%

**Electrical Connection:**

**D** order code:

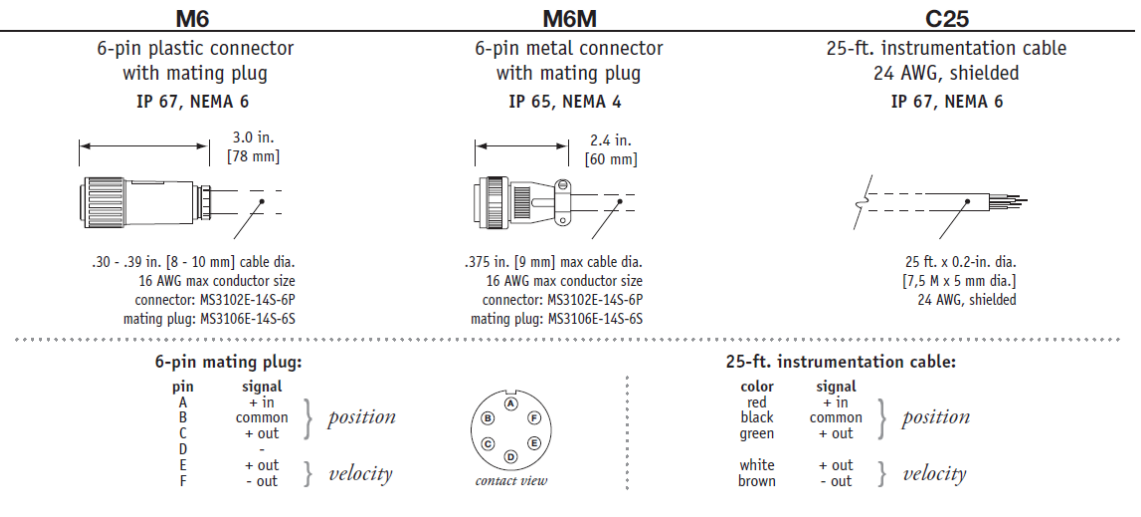

## PT5AV

Industrial Grade • Position/Velocity Output

---



**19 Waterman Ave. Toronto, Ont. M4B1Y2**  
**Tel: 416-445-5500 Fax: 416-445-1170**  
**Toll Free: 1-800-465-1600**  
**Email: [sales@intertechnology.com](mailto:sales@intertechnology.com)**  
**Website: [www.intertechnology.com](http://www.intertechnology.com)**

### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

PT5AV 12/01/2015