



IXARC Incremental Encoder

UCD-IPH00-XXXXX-Y06S-2RW



The picture is for presentation purposes only. Please refer to the detailed technical drawing at the end of the page.

Interface

| | |
|-----------------------|---|
| Interface | Programmable Incremental |
| Programming Functions | PPR (1-16384), Output, Counting Direction |
| Configuration Tool | UBIFAST Configuration Tool (Version \geq 1.6.3) |

Outputs

| | |
|---|--|
| Output Driver | Push-Pull (HTL) |
| Output Voltage High Level Push-Pull (HTL) | > 4 V @ 4.75-9 V Supply Voltage > V-3 V @ 9-30 V Supply Voltage |
| Output Voltage Low Level Push-Pull (HTL) | < 0.5 V |
| Output Voltage High Level RS422 (TTL) | > 4 V |
| Output Voltage Low Level RS422 (TTL) | < 0.5 V |
| Maximum Frequency Response | 1 MHz |
| Maximum Switching Current | 50 mA per Channel |

Electrical Data

| | |
|---------------------|--|
| Supply Voltage | 4.75 - 30 VDC |
| Current Consumption | \leq 140mA @ 5V DC, \leq 70mA @ 10V DC, \leq 40mA @ 24V DC |

Data Sheet

Printed at 8-03-2022 07:03



| | |
|-----------------------------|-------------------|
| Power Consumption | ≤ 1.0 W |
| Start-Up Time | < 1 s |
| Min. Load Resistance | 120 Ω |
| Reverse Polarity Protection | Yes |
| Short Circuit Protection | Yes |
| EMC: Emitted Interference | DIN EN 61000-6-4 |
| EMC: Noise Immunity | DIN EN 61000-6-2 |
| MTTF | 280 years @ 40 °C |

Sensor

| | |
|----------------|-----------------------------|
| Technology | Magnetic |
| Accuracy (INL) | ±0.0878° (≤ 12 bit) |
| Duty Cycle | 180° ± 27° (Speed > 100RPM) |
| Phase Angle | 90° ± 14° (Speed > 100RPM) |

Environmental Specifications

| | |
|----------------------------|---|
| Protection Class (Shaft) | IP66/IP67 |
| Protection Class (Housing) | IP66/IP67 |
| Operating Temperature | -30 °C fixed (-22 °F), -5 °C flexible (+23 °F) - +80 °C (+176 °F) |
| Humidity | 98% RH, no condensation |

Mechanical Data

Mechanical Data

| | |
|-----------------------------------|---|
| Housing Material | Steel |
| Housing Coating | Wet coating (RAL 9006 White Aluminium) + Cathodic corrosion protection (>720 h salt spray resistance) |
| Flange Type | Synchro, ø 58 mm (Y) |
| Flange Material | Aluminum |
| Shaft Type | Solid, Length = 10 mm |
| Shaft Diameter | ø 6 mm (0.24") |
| Shaft Material | Stainless Steel V2A (1.4305, 303) |
| Max. Shaft Load | Axial 40 N, Radial 110 N |
| Rotor Inertia | ≤ 30 gcm ² [≤ 0.17 oz-in ²] |
| Friction Torque | ≤ 5 Ncm @ 20 °C, (7.1 oz-in @ 68 °F) |
| Max. Permissible Mechanical Speed | ≤ 3000 1/min |

Data Sheet

Printed at 8-03-2022 07:03



| | |
|---|---|
| Shock Resistance | ≤ 100 g (half sine 6 ms, EN 60068-2-27) |
| Permanent Shock Resistance | ≤ 10 g (half sine 16 ms, EN 60068-2-29) |
| Vibration Resistance | ≤ 10 g (10 Hz - 1000 Hz, EN 60068-2-6) |
| Length | 56,7 mm (2.23") |
| Weight | 675 g (1.49 lb) |
| Minimum Mechanical Lifetime (10 ⁸ revolutions with Fa/Fr) | 400 (20 N / 40 N) |

Electrical Connection

| | |
|------------------------|---|
| Connection Orientation | Radial |
| Connector | Cable 2 m |
| Cable Length | 2 m [79"] |
| Wire Cross Section | 0.14 mm ² / AWG 26 |
| Material / Type | PVC |
| Cable Diameter | 6 mm (0.24 in) |
| Minimum Bend Radius | 46 mm (1.81") fixed, 61 mm (2.4") flexing |

Certification

| | |
|----------|----|
| Approval | CE |
|----------|----|

Product Life Cycle

| | |
|--------------------|-------------|
| Product Life Cycle | Established |
|--------------------|-------------|


Connection Plan

| SIGNAL | CABLE COLOR |
|--------------|-------------|
| A | Green |
| /A | Yellow |
| B | Gray |
| /B | Pink |
| Z | Blue |
| /Z | Red |
| Power Supply | Brown |
| GND | White |
| Shielding | Shield |

Connector-View on Encoder

Pulse Diagram

Data Sheet
Printed at 8-03-2022 07:03

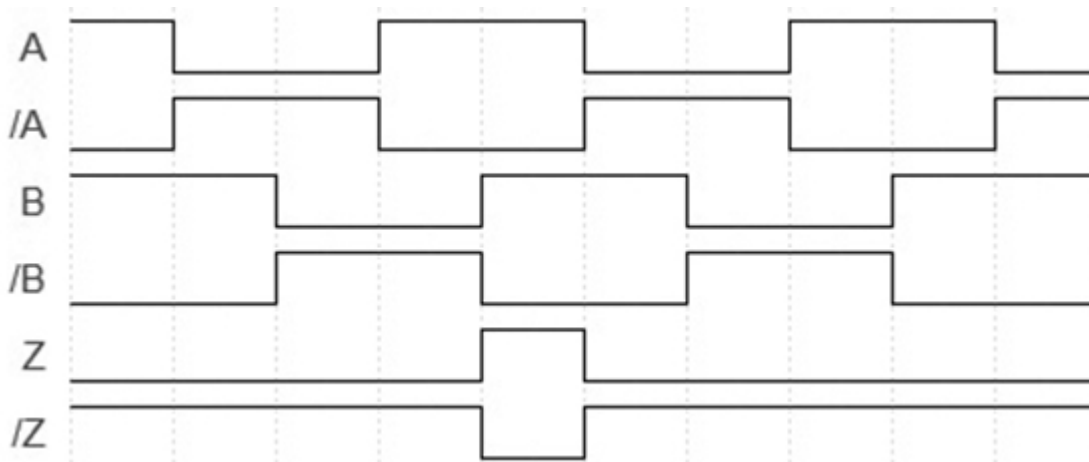

Rotation Clockwise (seen on shaft)

Dimensional Drawing

[2D Drawing](#)

Accessories

Configuration/Programming Tools

UBIFAST Configuration Tool

Couplings

Coupling Bellow Type-06-06

Coupling Bellow Type-06-10

Coupling Bellow Type-06-08

Coupling Bellow Type-06-(3/8")

Coupling Bellow Type-06-(1/4")

Coupling Jaw Type-06-06

Coupling Jaw Type-06-10

Coupling Jaw Type-06-08

Coupling Jaw Type-06-12

Coupling Jaw Type-06-(1/4")

Coupling Jaw Type-06-(3/8")

Coupling Disc Type-06-06

Coupling Disc Type-06-10

More

Adapter Flanges

Mounting Bracket for Synchro Flange w/ fixtures

Displays

AP20-00 Counter

Data Sheet

Printed at 8-03-2022 07:03



AP20-D0 Counter (4 dig. o/p)
AP20-0A Counter (analog o/p)
AP20-DA Counter (4 dig. + analog o/p)
DiMod Counter (Relay o/p)
More
Clamping Rings
Clamp Disc w/ Eccentric Hole-4pcs
Clamp Disc w/ Centred Hole-4pcs

Got questions? Need an individual solution? We are here to help!



Contact Us

The picture and drawing are for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings. All dimension in [inch] mm. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.