


# PR ONE CAM SWITCH SERIES

A selection of standard switching programmes and mounting forms for practical reliable solutions to be achieved quickly

## ► DESIGN AND FUNCTIONS

- 45° switching angle
- Forced opened contacts
- Finger protected (degree of protection up to IP 20)
- Short-circuit rated
- Fulfills the load of break requirements up to 690V
- Terminal screws in open position
- Switching capacity I<sub>e</sub> (A) : 16 A, 25 A and 32 A in AC21
- Manually operated control switches
- Front presentation : aluminium plate with black handle with index
- Laser marking on escutcheon
- Front degree of protection IP 40
- 2-screw panel mount - interval 30 mm

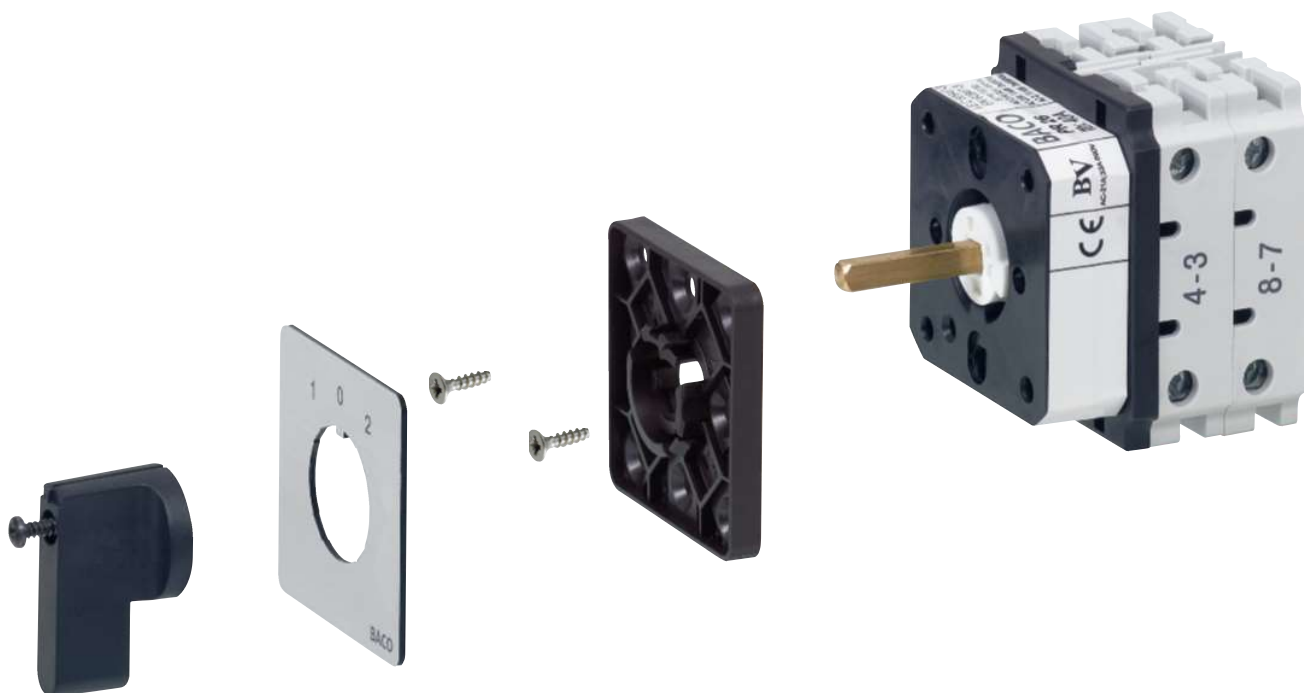

## ► APPLICATIONS

- ON-OFF switches
- Changeover switches
- Multi-step switches
- Instrument switches