


UR20-1COM-232-485-422

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Product image



Digital counter and communication modules 100/500 kHz; 32-bit counter resolution; individual channel diagnosis

Incremental and absolute value encoders have become indispensable in today's automated systems. Developed especially for these applications, Weidmüller offers you various counter modules that can accept an input frequency up to 500 kHz. The synchronous-serial interface (SSI) module allows high precision positioning tasks to be realised with absolute value encoders. The module can be parameterised for listening or master mode operation in order to cope with all fields of application. A module with pulse input is available to you for frequency measurement up to 100 kHz and the UR20-1CNT-500 offers an input that can accept frequencies up to 500 kHz. The UR20-2CNT-100 module has two independent counter inputs; it is supplemented with the UR20-1CNT-100-1DO module with one counter, which however offers additional options thanks to a latch, gate and reset input. This allows external control of the counter. In addition, this module can trigger an immediate event via a digital output using a set reference value.

The UR20-1COM-232-485-422 module offers you extended communication options; for example devices can be integrated consistently in u-remote systems via an RS232, RS485 or RS422 interface. The UR20-1COM-

SAI-PRO module presents a solution for connecting the control cabinet to the field. This gateway allows the integration of up to 15 decentral IP67 SAI-PRO Subbus modules per u-remote module.

The module electronics supply the connected sensors with power from the input current path (UIN).

General ordering data

Version	Remote I/O module, IP20, 1-channel, RS232/RS485/RS422 communication, PUSH IN connection
Order No.	1315750000
Type	UR20-1COM-232-485-422
GTIN (EAN)	4050118118858
Qty.	1 pc(s).
Replacement parts	1350930000 1347350000 2425150000

Creation date May 24, 2022 1:18:37 PM CEST

Catalogue status 20.05.2022 / We reserve the right to make technical changes.

UR20-1COM-232-485-422

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	76 mm	Depth (inches)	2.992 inch
Height	120 mm	Height (inches)	4.724 inch
Width	11.5 mm	Width (inches)	0.453 inch
Mounting dimension - height	128 mm	Net weight	87.03 g

Temperatures

Storage temperature	-40 °C ... +85 °C	Operating temperature	-20 °C ... +60 °C
---------------------	-------------------	-----------------------	-------------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Connection data

Type of connection	PUSH IN	Wire connection cross section, finely stranded, max.	1.5 mm ²
Wire connection cross section, finely stranded, min.	0.14 mm ²	Wire cross-section, finely stranded, max. (AWG)	AWG 16
Wire cross-section, finely stranded, min. (AWG)	AWG 26	Wire cross-section, solid, max.	1.5 mm ²
Wire cross-section, solid, max. (AWG)	AWG 16	Wire cross-section, solid, min.	0.14 mm ²
Wire cross-section, solid, min. (AWG)	AWG 26		

General data

Air humidity (operation)	10% to 95%, non-condensing as per DIN EN 61131-2			
Air humidity (storage)	10% to 95%, non-condensing as per DIN EN 61131-2			
Air humidity (transport)	10% to 95%, non-condensing as per DIN EN 61131-2			
Air pressure (operation)	≥ 795 hPa (height ≤ 2000 m) as per DIN EN 61131-2			
Air pressure (storage)	1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2			
Air pressure (transport)	1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2			
Pollution severity	2			
Rail	TS 35			
Restricted area	Positive expansion	X coordinate	43 mm	
		Y coordinate	160 mm	
		Z coordinate	85 mm	
	Negative expansion	Type of restricted area	thermal	
		Y coordinate	-40 mm	
		X coordinate	-28 mm	
Z coordinate	0 mm			
Shock	15 g over 11 ms, half sinus wave, acc. to IEC 60068-2-27			
Surge voltage category	II			
Test voltage	500 V			
UL 94 flammability rating	V-0			
Vibration resistance	5 Hz ≤ f ≤ 8.4 Hz: 3.5-mm amplitude as per IEC 60068-2-6, 8.4 Hz ≤ f ≤ 150 Hz: 1 g acceleration as per IEC 60068-2-6			

IP67 interface

Output current, supply voltage	max. 500 mA
--------------------------------	-------------

UR20-1COM-232-485-422

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Power supply

Current consumption from I_{IN} (the respective power segment)	16 mA + load	Current consumption from I_{sys} , typ.	8 mA
Voltage supply	24 V DC +20 %/ -15 %, via the system bus		

RS interface

Output current, supply voltage	max. 500 mA	Standards RS232	DIN 66020, DIN 66259, EIA-RS 232C, CCITT V.24/V.28
Standards RS485/422	DIN 66259 Part 1 und 3, EIA-RS 422/485, CCITT V.11		

System data

Field bus protocol	PROFINET IRT, PROFINET RT, PROFIBUS DP-V1, EtherCAT, Modbus/TCP, EtherNet/IP, CANopen, DeviceNet, POWERLINK, CC-Link, CC-Link IE TSN, IEC 61162-450	Galvanic isolation	500 V DC between the current paths
Interface	u-remote system bus	Module type	Functional module
Output current	0.5 A	Transmission speed of system bus, max.	48 Mbit

Classifications

ETIM 6.0	EC001604	ETIM 7.0	EC001604
ETIM 8.0	EC001604	ECLASS 9.0	27-24-26-08
ECLASS 9.1	27-24-26-08	ECLASS 10.0	27-24-26-08
ECLASS 11.0	27-24-26-08	ECLASS 12.0	27-24-26-08

Approvals

Approvals



ROHS	Conform
UL File Number Search	E141197

UR20-1COM-232-485-422

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany


www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity Lloyds Register certificate DNV/GL certificate ABS certificate RINA certificate Bureau Veritas - Type Approval Certificate PRS (Polish Register of Shipping) NIPPON KAIJI KYOKAI Certificate DEMKO15ATEX1525X
Engineering Data	CAD data – STEP Library and function block – CoDeSys 3.5 - EN - V2.0.0 Library and function block – Rockwell - Studio5000 Compatibility information – Combinability of UR20 Application notes – Modbus RTU Master with UR20-1COM-RS232-485-422 module Library and function block – Weidmueller u-create studio 1.20.2 - EN - V2.0.0
Engineering Data	WSCAD, Zuken E3.S, EPLAN
Product Change Notification	Release-Notes - Firmware
Software	Firmware – Current firmware UR20-1COM-232-485-422 Firmware – Archive firmware UR20-1COM-232-485-422
User Documentation	MAN U-REMOTE_DE MAN U-REMOTE_EN
Catalogues	Catalogues in PDF-format

Block diagram

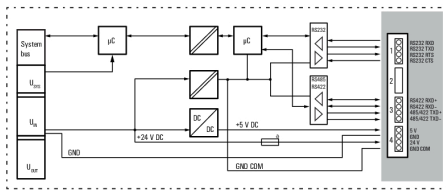

Connection diagram

