





ELYPS AM



ELYPS AM S



DRAWINGS, DIMENSIONS AND WEIGHTS



ELYPS AM | PART NO

	Grey	Black	White
ELYPS AM	32337	32338	32339
ELYPS AM S	32347	32348	32349

ELYPS AM ACOUSTIC MODULE

ELYPS AM acoustic modules are the right complement to add acoustic signalization to the luminous part of the stacklight. According to each application need, there are 2 possible solutions:

ELYPS AM

Piezoelectric acoustic module with 2 sounds (intermittent and continuous) over 2 channels (1+1). It allows to use both channels, by connecting 2 of the 7 available contacts of the wiring module.

ELYPS AM S

Magnetodynamic acoustic module with 16 sounds (mixed types) over 2 channels (8+8). It allows to use both channels, by connecting 2 of the 7 available contacts of the wiring module. For each channel it is possible to select the sound via dip-switch.

KEY CHARACTERISTICS

NUMBER OF TONES

AM | 1+1 sounds (intermittent + continuous) over 2 channels
 AM S | 8+8 sounds (mixed types) over 2 channels

VOLTAGES

According to selected Wiring Module (WM)
 With WM LT and WM LT MULTI: 12/24V ACDC
 With WM HT and WM HT MULTI: 120/240V AC

PROTECTION GRADE

IP65, suitable for outdoor applications

OPERATING TEMPERATURE

-30/+50 C°

MECHANICAL FEATURES

Self extinguishing PC body with high impact resistance, suitable for outdoor use thanks to the IP65 protection grade

ACOUSTIC FEATURES

AM | Piezoelectric unit, frequency 3600Hz +/-100
 AM S | Magnetodynamic unit, mixed frequencies 490-2800Hz

CERTIFICATIONS




ELYPS


everybody loves beauty

PHILOSOPHIES


AM ACOUSTIC MODULE

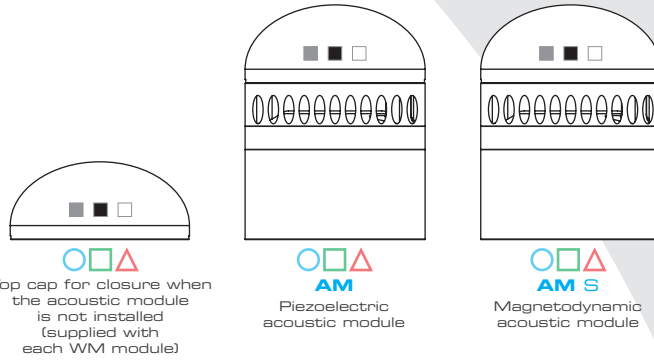


LM LIGHT MODULE

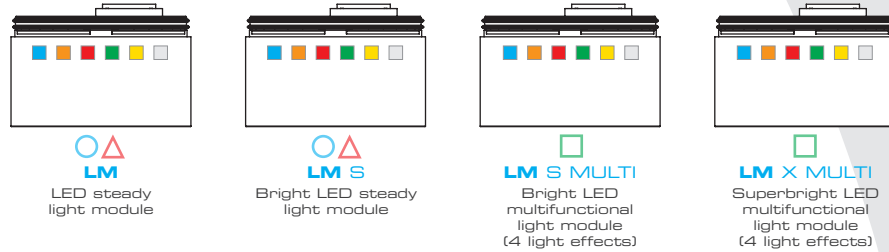

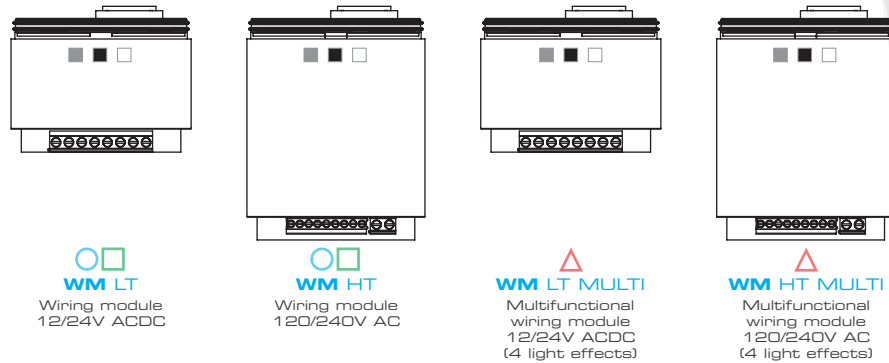


WM WIRING MODULE

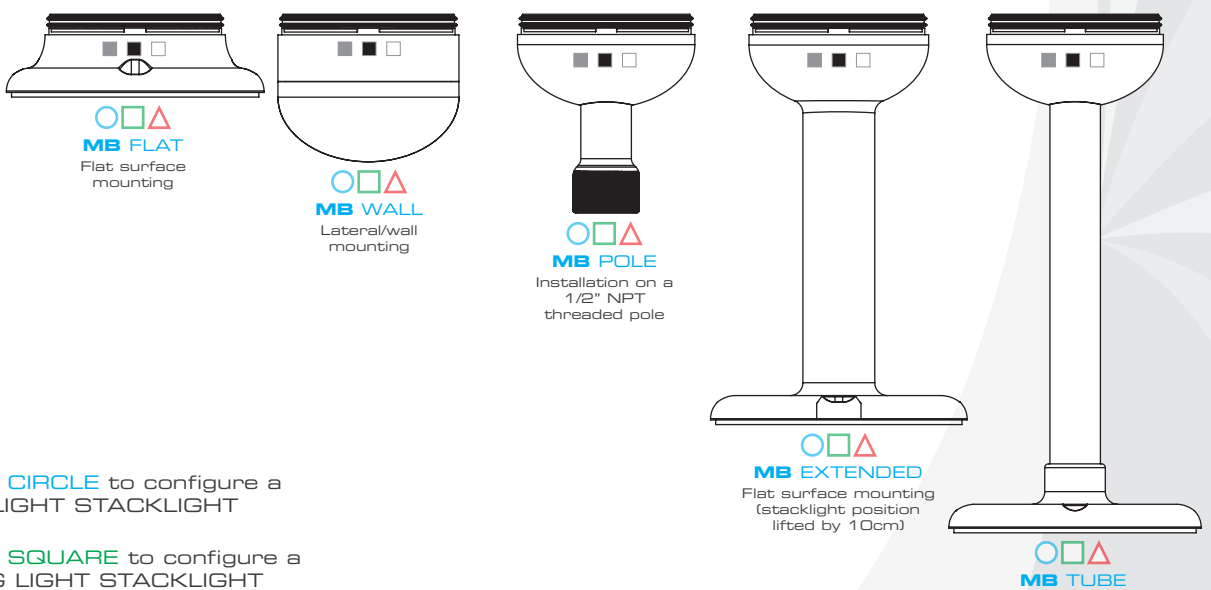

MB MOUNTING BASE



-  Follow the **CIRCLE** to configure a **STEADY LIGHT STACKLIGHT**
-  Follow the **SQUARE** to configure a **FLASHING LIGHT STACKLIGHT**
-  Follow the **TRIANGLE** to configure a **STACKLIGHT WITH FLASHING CONTROLS IN THE BASE**