














Indicator lights, 22 mm, round, plastic, white, lens, smooth, with holder, LED module, with integrated LED 230 V AC, screw terminal

<b>product brand name</b>	SIRIUS ACT
<b>product designation</b>	Indicator lights
<b>design of the product</b>	Complete unit
<b>product type designation</b>	3SU1
<b>product line</b>	Plastic, black, 22 mm
<b>manufacturer's article number</b>	
• of supplied LED module	<a href="#">3SU1401-1BF60-1AA0</a>
• of the supplied holder	<a href="#">3SU1550-0AA10-0AA0</a>
• of supplied repeater	<a href="#">3SU1001-6AA60-0AA0</a>
<b>Enclosure</b>	
<b>number of command points</b>	1
<b>Actuator</b>	
<b>product extension optional light source</b>	Yes
<b>color</b>	
• of the actuating element	white
<b>material of the actuating element</b>	plastic
<b>shape of the actuating element</b>	round
<b>outer diameter of the actuating element</b>	29.45 mm
<b>Front ring</b>	
<b>product component front ring</b>	No
<b>Holder</b>	
<b>material of the holder</b>	Plastic
<b>Display</b>	
<b>number of LED modules</b>	1
<b>General technical data</b>	
<b>product component light source</b>	Yes
<b>insulation voltage rated value</b>	320 V
<b>degree of pollution</b>	3
<b>surge voltage resistance rated value</b>	4 kV
<b>protection class IP</b>	IP66, IP67, IP69(IP69K)
• of the terminal	IP20
<b>degree of protection NEMA rating</b>	1, 2, 3, 3R, 4, 4X, 12, 13
<b>shock resistance</b>	
• according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
• for railway applications according to EN 61373	Category 1, Class B
<b>reference code according to IEC 81346-2</b>	P
<b>Substance Prohibitance (Date)</b>	10/01/2014
<b>SVHC substance name</b>	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 2-Methyl-1-(4-methylthiophenyl)-2-morpho - 71868-10-5

Supply voltage					
type of voltage of the supply voltage of the light source	AC				
<b>supply voltage of the light source at AC</b>					
• at 50 Hz rated value	230 V				
• at 60 Hz rated value	230 V				
• at 60 Hz rated value	230 ... 230 V				
<b>relative negative tolerance of the supply voltage</b>	20 %				
<b>relative positive tolerance of the supply voltage</b>	20 %				
Control circuit/ Control					
<b>inrush current maximum</b>	3 A				
Connections/ Terminals					
<b>type of electrical connection</b>	other				
• of modules and accessories	Screw-type terminal				
<b>type of connectable conductor cross-sections</b>					
• solid with core end processing	2x (0.5 ... 0.75 mm <sup>2</sup> )				
• solid without core end processing	2x (1.0 ... 1.5 mm <sup>2</sup> )				
• finely stranded with core end processing	2x (0.5 ... 1.5 mm <sup>2</sup> )				
• finely stranded without core end processing	2x (1,0 ... 1,5 mm <sup>2</sup> )				
• for AWG cables	2x (18 ... 14)				
<b>tightening torque of the screws in the bracket</b>	1 ... 1.2 N·m				
tightening torque with screw-type terminals	0.8 ... 0.9 N·m				
Lamp					
<b>type of light source</b>	LED				
<b>color of the light source</b>	white				
<b>light intensity</b>	900 ... 1 400 mcd				
Ambient conditions					
<b>ambient temperature</b>					
• during operation	-25 ... +70 °C				
• during storage	-40 ... +80 °C				
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted for all devices behind front panel)				
Environmental footprint					
Environmental Product Declaration (EPD)	Yes				
Global Warming Potential [CO2 eq] total	0.787 kg				
Global Warming Potential [CO2 eq] during manufacturing	0.566 kg				
Global Warming Potential [CO2 eq] during operation	0.235 kg				
global warming potential [CO2 eq] after end of life	-0.015 kg				
Installation/ mounting/ dimensions					
<b>fastening method</b>	front plate mounting				
• of modules and accessories	Front plate mounting				
<b>height</b>	40 mm				
<b>width</b>	30 mm				
<b>shape of the installation opening</b>	round				
<b>mounting diameter</b>	22.3 mm				
<b>positive tolerance of installation diameter</b>	0.4 mm				
<b>mounting height</b>	11.8 mm				
<b>installation width</b>	29.5 mm				
<b>installation depth</b>	49.7 mm				
Approvals Certificates					
General Product Approval	Declaration of Conformity				
	<a href="#">Confirmation</a>				
					
Declaration of Conformity	Test Certificates	Marine / Shipping			



[Type Test Certificates/Test Report](#)



other

Environment

[Confirmation](#)

[Environmental Confirmations](#)

#### Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1106-6AA60-1AA0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1106-6AA60-1AA0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1106-6AA60-1AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1106-6AA60-1AA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1106-6AA60-1AA0&lang=en)

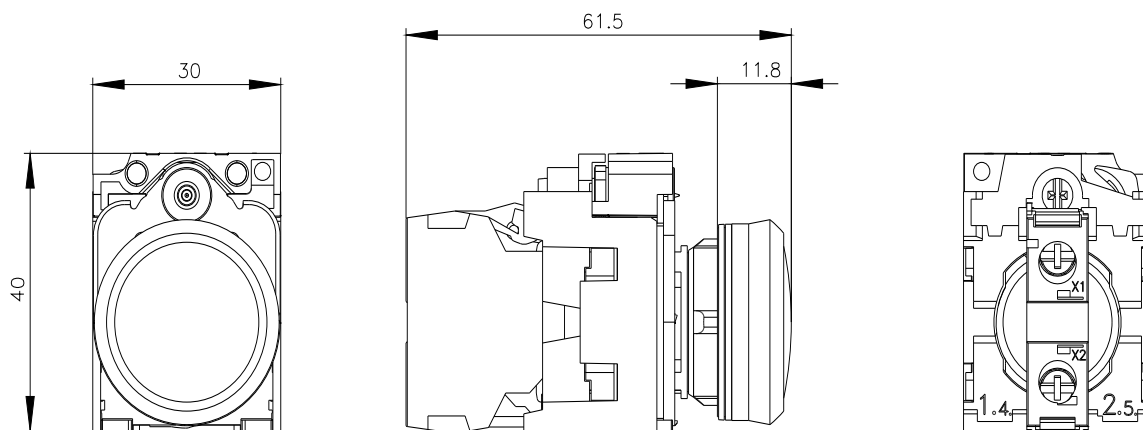

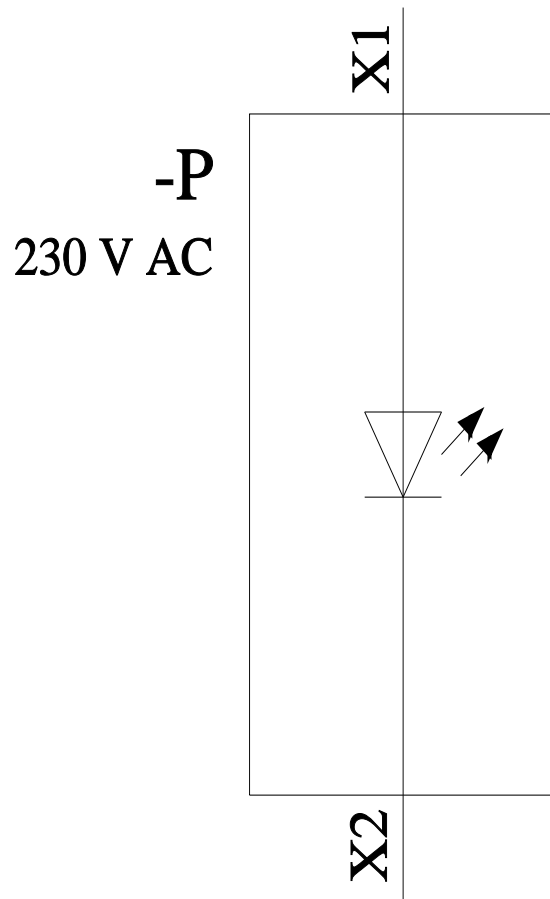

---

last modified:

11/8/2023 