

product description

RJ45 data connector

SIPLUS NET RJ45 plug 180 2x2 based on 6GK1901-1BB10-2AA0 with conformal coating, -40...+70 °C, RJ45 plug-in connector (10/100 Mbps) with rugged metal enclosure and FC connection technology, for IE FC cable 2x2 180° cable outlet 1 pack = 1 unit

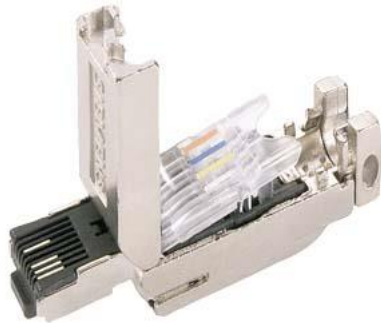


Figure similar

suitability for use

For connection to IE FC TP cables 2x2, suitable for fast assembly with the FastConnect system

transfer rate	
transfer rate / for Industrial Ethernet	10 Mbit/s, 100 Mbit/s
interfaces	
number of electrical connections	
• for Industrial Ethernet FC TP cables	4
• for network components or terminal equipment	1
type of electrical connection	
• for Industrial Ethernet FC TP cables	integrated cut-and-clamp contacts for 4-wire TP FC installation cable
• for network components or terminal equipment	RJ45 connector
type of electrical connection / FastConnect	Yes
mechanical data	
material / of the enclosure	metal
design, dimensions and weights	
type of cable outlet	180° cable outlet
width	13.7 mm
height	16 mm
depth	55 mm
net weight	35 g
ambient conditions	
ambient temperature	
• in horizontal mounting position / during operation	70 ... -40 °C
• during storage and transport	70 ... -40 °C
installation altitude / at height above sea level / maximum	5000 m
ambient condition / relating to ambient temperature - air pressure - installation altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
relative humidity	
• with condensation / acc. to IEC 60068-2-38 / maximum	100 %; RH including condensation/frost (no commissioning when condensation is present), horizontal installation
resistance to biologically active substances	
• conformity acc. to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
• conformity acc. to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
resistance to chemically active substances	
• conformity acc. to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *

<ul style="list-style-type: none"> <li>conformity acc. to EN 60721-3-6</li> </ul>	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
resistance to mechanically active substances <ul style="list-style-type: none"> <li>conformity acc. to EN 60721-3-3</li> <li>conformity acc. to EN 60721-3-6</li> </ul>	Yes; Class 3S4 incl. sand, dust, * Yes; Class 6S3 incl. sand, dust; *
environmental category / acc. to IEC 60721 / note	* The supplied plug covers must remain in place over the unused interfaces during operation!
coating / for equipped printed circuit board / acc. to EN 61086	Yes; Class 2 for high availability
type of coating <ul style="list-style-type: none"> <li>protection against pollution according to EN 60664-3</li> <li>for electronic devices in railway applications acc. to EN 50155</li> </ul>	Yes; protection of the type 2 Yes; protective coating of the Class PC2 according to EN 50155:2018
type of test / of the coating / acc. to MIL-I-46058C	Yes; Discoloration of coating possible during service life
product conformity / of the coating / Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies acc. to IPC-CC-830A	Yes; Conformal coating, Class A
protection class IP	IP20
<b>product features, product functions, product components / general</b>	
product feature <ul style="list-style-type: none"> <li>silicon-free</li> </ul>	Yes
product component <ul style="list-style-type: none"> <li>strain relief</li> </ul>	Yes
<b>standards, specifications, approvals</b>	
certificate of suitability <ul style="list-style-type: none"> <li>RoHS conformity</li> <li>UL approval</li> </ul>	Yes No
standard for structured cabling	Cat5
<b>further information / internet-Links</b>	
Internet-Link <ul style="list-style-type: none"> <li>to web page: selection aid TIA Selection Tool</li> <li>to website: Industrial communication</li> <li>to website: Industry Mall</li> <li>to website: Information and Download Center</li> <li>to website: Selection guide for cables and connectors</li> <li>to website: Image database</li> <li>to website: CAx-Download-Manager</li> <li>to website: Industry Online Support</li> </ul>	<a href="http://www.siemens.com/snst">http://www.siemens.com/snst</a> <a href="http://www.siemens.com/simatic-net">http://www.siemens.com/simatic-net</a> <a href="https://mall.industry.siemens.com">https://mall.industry.siemens.com</a> <a href="http://www.siemens.com/industry/infocenter">http://www.siemens.com/industry/infocenter</a> <a href="https://sie.ag/2QdlxcP">https://sie.ag/2QdlxcP</a>  <a href="http://automation.siemens.com/bilddb">http://automation.siemens.com/bilddb</a> <a href="http://www.siemens.com/cax">http://www.siemens.com/cax</a> <a href="https://support.industry.siemens.com">https://support.industry.siemens.com</a>
<b>last modified:</b>	5/20/2021 